




MFJ MULTI-MODE DATA CONTROLLER **With Multi-Gray Level Modem**

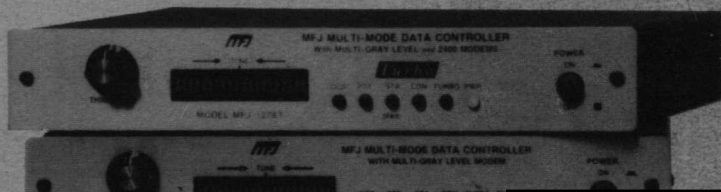

MFJ ENTERPRISES, INC.

Model MFJ-1278

Multi-Mode Data Controller
Revision 9

SYSTEM MANUAL

Third Edition
1990

(c) Copyright 1990, MFJ Enterprises, Inc.

***** Important Notice: Please Read *****

This MFJ-1278 System Instruction Manual (Third Edition) is
for MFJ-1278 with Revision 9 and later mother board.

If you have the MFJ-1278 with Revision 8 or earlier mother board and your MFJ-1278 has not been upgraded, please be aware that some features and information mentioned in this Instruction Manual may not apply to your MFJ-1278.

Pre-revision 9 MFJ-1278 owners may contact MFJ Enterprises, Inc. for upgrade information. Some new features may not be installable on certain board revisions.

TNC 2 SOFTWARE SOURCE CODE and TNC FIRMWARE
Copyright (c) 1985
Systek

MFJ-1278 SOFTWARE SOURCE CODE and FIRMWARE
Copyright (c) 1989
MFJ Enterprises, Inc.

All rights reserved.

Reproduction or translation of any part of this work beyond
that permitted by Sections 107 or 108 of the 1976 United
States Copyright Act (or its legal successor) without the

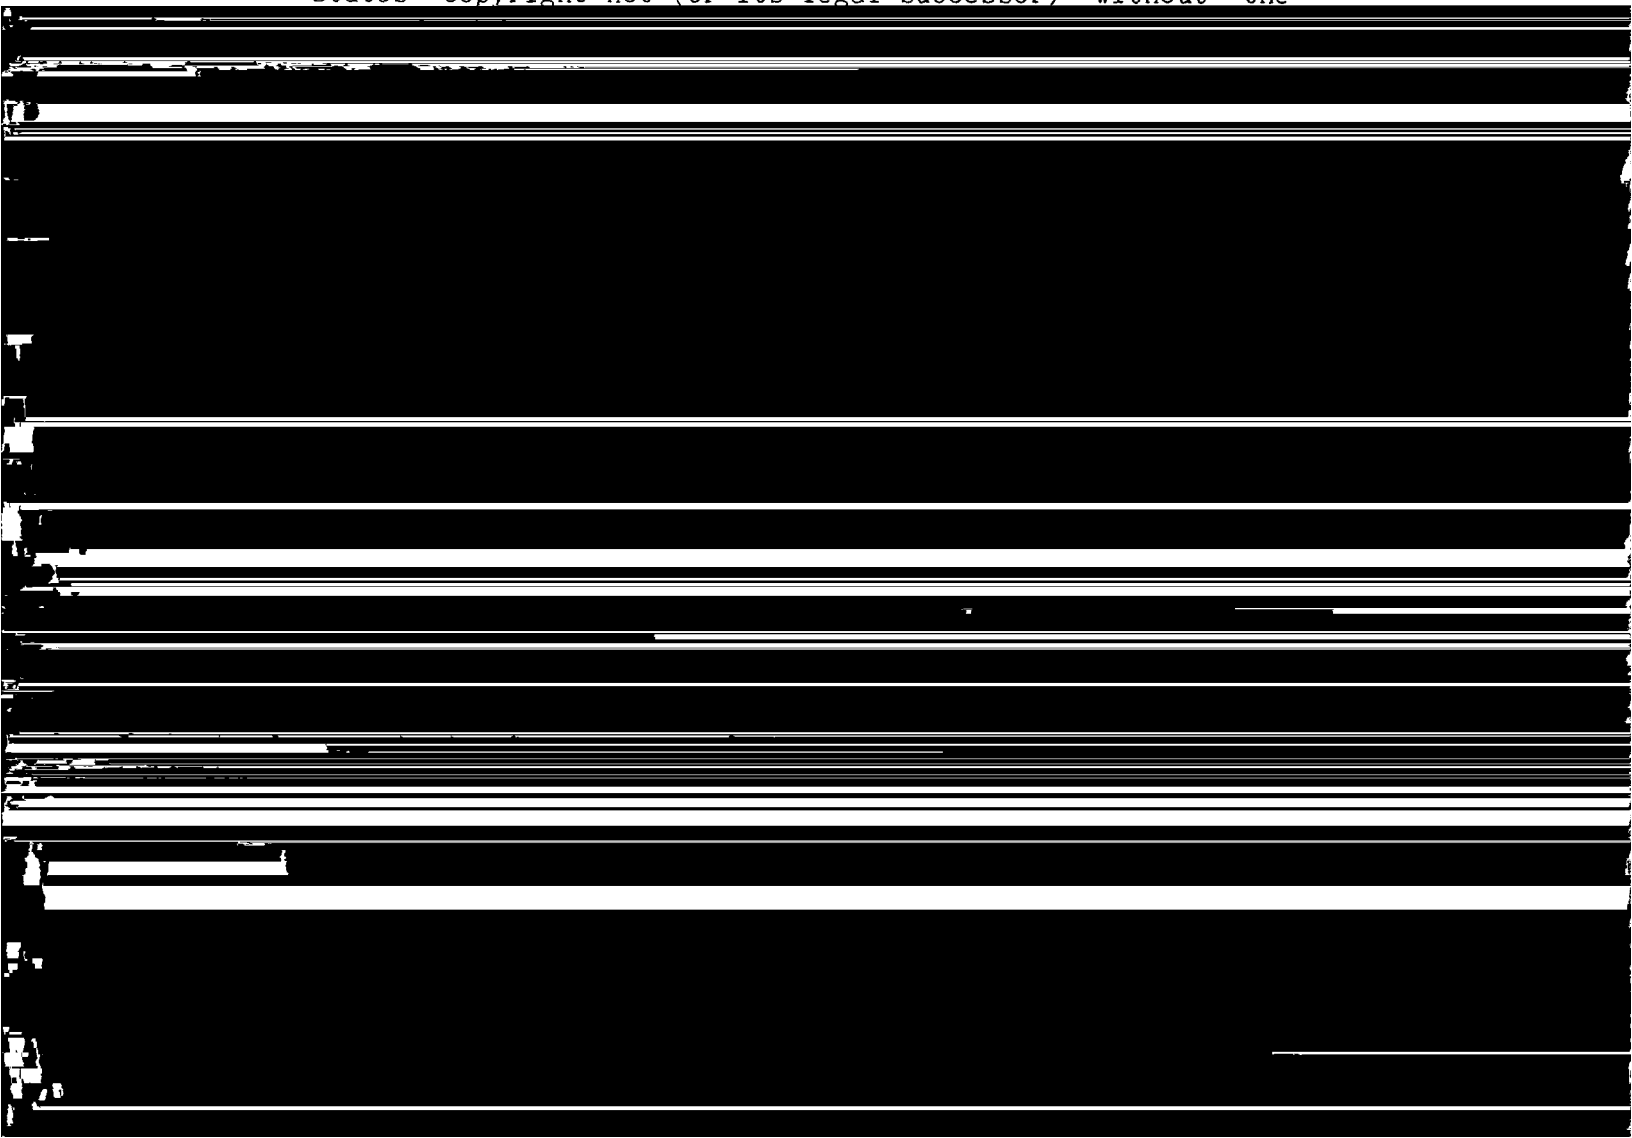


TABLE OF CONTENTS

CHAPTER 1 INTRODUCTION

Introduction	1-1
Acknowledgments	1-2

CHAPTER 2 COMPUTER INTERFACING

MPX Terminal Software Starter Packs	2-1
---	-----

Radio Interfacing Methods	3-4
Method 1: Direct Connection to Microphone and Speaker..	3-4
Transmit Audio Level Adjustment (I)	3-5
Setting the Receiver Audio Input Level	3-6
Method 2: Accessory Jack or Interface Box Connection ..	3-7
Transmit Audio Level Adjustment (II)	3-9
Receiver Audio Setting	3-10
Harmonics Interference	3-11
Monitor Speaker Connection	3-11
CW Installation	3-12
DC Keying Connection	3-12
Key Paddle Connection	3-12

CHAPTER 4 BASIC OPERATION: ALL MODES

First Steps	4-1
Basic Parameters Setup	4-2
Serial Port Configuration	4-2
Parity and Word Length	4-3
Echos	4-3
New Lines and Line Wrapping	4-4
The MFJ-1278 Multi-Mode Modem	4-5
Operation Mode	4-6
Verifying Operation Status	4-6
Mode Switching with the MODE Command	4-6
Radio Port Switching	4-8
Memory Buffers	4-8
Loading Memory Buffers	4-8
Memory Buffers Transmitting	4-8
Buffer Serial Number	4-9
Memory Repeat & Buffer Repeat Time	4-9
Chaining the Memory Buffers	4-10
Tuning Indicator	4-10
Operation: Packet	4-12
Basic VHF Packet	4-12
A Connecting and Disconnecting Exercise	4-12
Digipeating	4-14
Unsuccessful Connections	4-15
Monitoring Channel Activity	4-16
Your First Packet QSO	4-17
Starting the QSO	4-18
Digipeating	4-19
Monitoring on the Air	4-19

Radio Tune	4-30
Random Code Generator	4-30
Setting Up for Code Practice	4-31
Operation: CW Contest Memory Keyer	4-33
Sending CW with External Key Paddle	4-35
Operation: Modulated CW	4-34
Operation: Baudot RTTY & ASCII	4-35
Setting Up for ASCII and RTTY Operation	4-35
RTTY & ASCII Receiving	4-36
RTTY & ASCII Transmitting	4-36
Operation: AMTOR	4-38
Mode A "ARQ "	4-38

CHAPTER 5 ADVANCED OPERATION: PACKET

Packet Special Characters	5-1
Packet Operating Modes	5-2
Command Mode	5-3
Entering Data-Transfer Modes	5-4
Converse Mode	5-5
Transparent Mode	5-6
Flow Control	5-7
XON/XOFF Flow Control	5-8
Hardware Flow Control	5-9
Type-in Flow Control	5-9
Detail VHF Packet Operation	5-10
Station Identification	5-10
Automatic Operations	5-11
Unattended Operations	5-12
Packet Formatting	5-12
Commands Affecting Protocol	5-13
Packet Timing Functions	5-13
Transmit Timing	5-13
Packet Timing	5-14
Radio Baud Rate	5-16
Special Protocol Times	5-17
Monitor Functions	5-17
Real-Time Clock and Time Stamping	5-18
Multi-Connect Guide	5-19
Setting the MFJ-1278 to Normal Operation	5-19
How to Invoke Multi-Connect	5-19
Easy-mail Mailbox	5-21
Setting Up Your Easy-mail Mailbox	5-21
Mailbox Operation	5-23
Mailbox Messages	5-26
Slotting and Acknowledgment Priority	5-27
Description	5-27

CHAPTER 6 OPERATION COMMANDS

Entering Commands	6-1
Command Explanation	6-2
Command List	6-2
Command Name	6-2
Default	6-2
Parameters	6-2
Commands	6-5

CHAPTER 7 MESSAGES

Packet Messages	7-1
Mailbox Messages	7-2
Command Mode Error Messages	7-3
Link Status Messages	7-5

CHAPTER 8 HARDWARE

1278 Specifications	8-1
General Description	8-2
Detailed Circuit Description	8-3
Oscillator	8-3
Dividers and Baud-rate Generator	8-3
CPU Complex	8-4
Serial Interface	8-4
Watch-dog Timer	8-5
Modem	8-6
Power Supply	8-6
RS 232C Handshaking Protocol	8-7

Symptom: MFJ-1278 appears dead	9-3
Oscillator and Reset Circuits	9-3
Digital Logic Lines	9-3
Symptom: Modem won't calibrate or key transmitter ..	9-4
Symptom: Uncopyable transmitted or received packet .	9-4
Terminal Interface Troubleshooting	9-5
Symptom: MFJ-1278 won't sign on to the terminal	9-5
Symptom: MFJ-1278 appears to be signing on but	9-6
Symptom: MFJ-1278 signs on but won't accept commands	9-6
Symptom: MFJ-1278 appears to have "lock-up"	9-6

CHAPTER 10 PACKET RADIO PROTOCOL

Explanation of Protocol	10-1
Physical Layer	10-2
Data Link Layer	10-2
HDLF Frames	10-2
AX.25 Level Two	10-3
Channel Flow Control	10-8

Channel Flow Control	10-8
----------------------------	------

APPENDIXES

Appendix A - Hookup for Specific Radios	APX-1
Appendix B - Modulator and Demodulator Calibration ...	APX-2
Appendix C - Audio Output Adjustment	APX-17
Appendix D - HF Radio Alignment	APX-19
Appendix E - Converting to "Like-TNC 2"	APX-21
Appendix F - 2400 Packet Operation	APX-23
Appendix G - Jumper Functions and Location	APX-25
Appendix H - Command Summary	APX-28

FIGURES

Fig. 2-1.	Serial port wiring for Apple Macintosh	2-4
Fig. 2-2A.	TTL port wiring for Vic-20, C64 and C128	2-5
Fig. 2-2.	Serial port wiring for Radio Shack Color Computers	2-6
Fig. 2-3.	Serial port wiring with jumpers for auxiliary signals	2-7
Fig. 3-1.	Radio Ports 1 and Radio Port 2 Connector	3-1
Fig. 3-2.	Radio Port Cable with Connector	3-2
Fig. 3-3.	HT Special Keying Circuit	3-3
Fig. 3-4.	JMP L and JMP K Location	3-3
Fig. 3-5.	Method One Interconnect	3-4
Fig. 3-6.	Accessory Jack Interface	3-7
Fig. 3-7.	External Interface Box	3-8
Fig. E-1.	Header U27	APX-21
Fig. E-2.	Header U28	APX-22
Fig. G-1.	Jumper Connector Location	APX-27

TABLES

Table 2-1.	Serial port signals required by MFJ-1278 ...	2-3
------------	--	-----

INTRODUCTION

Welcome to the exciting world of Amateur Digital Communications. By choosing the MFJ-1278, you have chosen the most versatile and powerful Multi-mode Data Controller manufactured for the Amateur Radio Service.

The MFJ-1278 interfaces your radio with any personal computer that has an RS-232 or TTL level Serial Port and a terminal program. While most communications programs will work, MFJ recommends the use of MFJ Starter Pack for those who have IBM or compatible, Macintosh or Commodore C64/128 computers. With an IBM or compatible computer, the MFJXFER terminal program gives you a new Packet Picture Transfer mode that lets you transmit and receive EGA and CGA pictures.

This compact versatile controller employs the genuine TAPR TNC 2 AX.25 protocol packet firmware plus many added features to receive and transmit VHF packet, HF packet, AMTOR, CW, ASCII, RTTY, Facsimile, and SSTV. The new SSTV multi-level board gives you the ability to receive and transmit multi-gray level FAX and SSTV pictures. In addition, MFJ-1278 lets you monitor the new and growing NAVTEX system. MFJ-1278 also has a Contest Memory Keyer mode.

The MFJ-1278 also gives you the new Easy Mail Personal Mailbox. This mailbox has soft-partitioned memory so messages are not limited to a certain number of characters.

You also get MFJ's 20-segment, 10 Hz Precision Tuning Indicator that makes tuning for HF Packet and other modes that require precise tuning easy. This unique tuning indicator also provides a uniform tuning method for all modes of operation, so you don't have to remember different tuning methods for different modes.

In addition, the advanced new DCD circuit in the MFJ-1278 has been optimized for HF packet. It can be adjusted to ignore background noise while still being able to respond to a valid data carrier. New "packet collision prevention" features -- Prioritized Acknowledgments and Slottime are installed. This new technology helps prevent many packet collisions inherent in the current packet protocol.

A new IC socket type I/O Port lets you add peripherals such as the new MFJ Picture Perfect Digitizer -- even if the device is not designed specifically for your type computer.

You also get a Key Paddle jack so you can use your MFJ-1278 as an Iambic Keyer or Memory Keyer. Ten user-programmable memory buffers are provided for the contest memory keyer function. In addition you also get contest serial numbering and a random code generator.

A speaker jack lets you plug in a speaker and monitor transmit and receive audio and CW side tone as it is received and transmitted by your MFJ-1278. Speaker output also provides packet connect signal alarm.

A Centronics compatible parallel printer port (DB-25) lets you directly interface your printer to the MFJ-1278 for printing received text, Packet, FAX and SSTV pictures.

Dual Radio Ports for HF and VHF let you connect 2 radios at once in any combination. Independent transmit audio output adjustment is provided for each radio port.

You also get a Threshold control for optimizing your demodulator filter for different modes of operation.

The MFJ-1278T has a 2400 modem installed. If your MFJ-1278 does not have the 2400 modem installed, it can be purchased separately (MFJ-2400) and installed by the user. With the 2400 modem installed, your MFJ-1278 can operate 300, 1200 and 2400 packet. The only difference between the MFJ-1278 and the MFJ-1278T is that the MFJ-1278T has the 2400 modem

Your MFJ-1278 package includes the following items:

1. One MFJ-1278 Multi-Mode Data Controller
2. One AC adapter Power Supply for 110V AC.
3. Two Radio Port cables with 5-pin DIN male connectors.
4. One 8-pin connector the TTL port.
5. One MFJ-1278 Instruction Manual.
6. One MFJ-1278 Fast-Start Manual.

ACKNOWLEDGMENTS

MFJ Enterprises, Inc. wishes to thank the following persons who contributed to the development of the MFJ-1278:

Howard Goldstein, N2WX, who wrote the firmware for the MFJ-1278.

Jim Griffith, WA5RAX, for his hours spent beta testing the MFJ-1278 and his suggestions for improving HF packet and RTTY modes.

Eric Gustafson, N7CL, who helped make the MFJ-1278 modem superior to all others. He also helped in documenting sections of this instruction manual: Modem calibration and HF Packet operation.

Lyle Johnson, WA7GXD, who helped us with the MFJ-1278 schematic.

Dan Morrison, KV7B, whose suggestions helped make the MFJ-1278 CW and Contest Memory Keyer modes the best ever.

Buck Rogers, K4ABT, who has spent hours in beta testing all the new innovations and firmware for the MFJ-1278 and its supporting software.

Bob Slomka, WD4MNT, whose software innovations establish the packet picture standard and make operation of every digital mode in the MFJ-1278 more powerful and easier than ever.

Also to countless unnamed others for their various contributions to the development of the MFJ-1278.

Finally, to you, the user, for putting another MFJ-1278 on

COMPUTER INTERFACING

You are now ready to attach your MFJ-1278 to your station computer or terminal. Throughout this manual we will use the term "computer" to refer to the computer or terminal you use to communicate with your MFJ-1278.

The MFJ-1278 communicates with your computer through a serial port using signals corresponding to a standard called RS-232C. Why an RS-232C interface? Nearly every computer in production today either incorporates an RS-232C style serial port as a standard feature, or has one available as an optional accessory, either from the computer manufacturer or from a manufacturer of computer accessories. In addition to the RS-232C port, the MFJ-1278 has a built-in TTL port to allow interfacing with computers which need TTL signals such as the Commodore C-64, C-128 or the VIC-20.

In order to use the MFJ-1278 with your computer, the computer must have an RS-232C serial port, or a TTL serial port and a program to support the serial or TTL port. The program will typically be called a modem, terminal emulator, or communications program.

Since there are so many computers on the market today, it is impractical for this chapter to provide detailed instructions for each computer. Detailed information is given for some of the popular models available in the United States. Also provided is general computer interfacing information.

MFJ Starter Packs

MFJ Enterprises, Inc. offers a Starter Pack for some of the most popular computers. These Starter Packs contain a terminal program and a cable for connecting the MFJ-1278 to your computer. The Starter Packs available are as follows:

MFJ-1282: Commodore VIC-20, C64, C128 in 5-1/4" diskette.

MFJ-1283: Commodore VIC-20, C64 in tape.

MFJ-1284: IBM PC/XT/AT & clones in 5-1/4" diskette.

MFJ-1284M: IBM PC/XT/AT & clones in 3-1/2" diskette.

MFJ-1287: Apple Macintosh in 3-1/2" diskette.

If you are using one of the MFJ Starter Pack, you should use the cable provided to connect the MFJ-1278 and your computer. Follow the instruction manual provided with the Starter Pack to operate the terminal program and to connect the MFJ-1278 to your computer. After connecting the MFJ-1278 to your computer you can then proceed to the "Computer Board Detail" section in this chapter to establish installation.

were a standard RS-232C modem. If you have successfully used your computer with a telephone modem, hook it up to the MFJ-1278 in the same way. Use whatever program you ordinarily use to communicate with the modem.

Table 2-1. Serial port signals required by MFJ-1278.

Pin	Signal Name	Description
2	Transmit Data	Serial data <u>from</u> your computer <u>to</u> the MFJ-1278.
3	Receive Data	Serial data <u>from</u> the MFJ-1278 <u>to</u> your computer.
7	Signal Ground	The common ground for both data lines.

If your computer is listed in Table 2-2, refer to the specific information in the following sections to connect your MFJ-1278 to your computer.

Table 2-2. Computers with specific serial interfacing instructions.

Manufacturer	Model
Apple	Macintosh (tm) Apple II, II+, IIe, II-gs(tm)
Commodore	VIC-20 (tm) C-64 (tm) C-128 (tm)
IBM	PCjr, PC-XT, PC-AT (tm) most compatibles and clones
Radio Shack	Color Computer (tm) 1000, 1000HD, 1000EX, 1000SX, 1200, 2000, 3000HL, 3000 Model 100/102
NEC	8201

Many computers require a serial port adapter card. These cards incorporate the circuitry necessary to add an RS-232C port to the computer. Some popular models in this category are the Apple II series, the IBM Personal Computer, many Radio Shack computers, and the Sanyo MBC-55X series. If you have one of these computers with an "add-in" serial port, or if you have another computer we haven't mentioned, you should consult one of the sections on "other computers." If

Some computers have no serial port and no adapter is commercially available. Such computers are not suitable for use with the MFJ-1278.

Computer with Specific Serial Interfaces

Apple Macintosh

The Macintosh serial port is an RS-422 compatible port, but it will work fine with the RS-232C serial port on your MFJ-1278.

MFJ Enterprises, Inc. offers an optional Starter Pack for the Macintosh. It can be purchased from MFJ Enterprises, Inc. or any MFJ dealer. The Starter Pack includes an interface cable for connecting the MFJ-1278 to the Macintosh and a terminal program. The Starter Pack for Macintosh is MFJ-1287. If you wish to use your own cable, you will need a cable wired as shown in Fig. 2-1.

Macintosh	MFJ-1278	Macintosh	MFJ-1278
8 pin	DB-25P	DB-9P	DB-25P
1 (HSKO) -----	4	1 -----	1
2 (HSKI) -----	6	5 -----	2
3 (TXD-) -----	2	9 -----	3
4 (GND) -----	7	3 -----	7

MFJ dealer. The Starter Pack includes an interface cable
from the MFJ-1278 TTY port to the user I/O port on the

If you wish to construct your own cable, the information is
as follows:

Radio Shack Color Computer

The Color Computer series (except for the Micro Color Computer) uses a 4-pin DIN-style connector for its serial interface. Wire a cable as shown in Fig. 2-2 to interface your MFJ-1278 to a Color Computer. All necessary parts should be available from Radio Shack dealers.

Color Computer DB-25P

```

4 ----- 2
2 ----- 3
3 ----- 7

```

Fig. 2-2. Serial port wiring for Radio Shack Color Computers.

Radio Shack Model 100/102 and NEC 8201

These computers have built-in standard RS-232C serial ports that are compatible with the MFJ-1278. You will need a standard male-to-male RS-232C extension cable to connect the computer to the MFJ-1278.

IBM PC/XT/AT and compatibles Computer

"Include other computers with 25-pin RS-232 Ports"

If your computer is a IBM PC/XT/AT or a compatible or clone, you should have a serial port with standard DB-25 pin connector. You may use a standard IBM PC/XT/AT **serial modem cable** with the correct gender on each end of the cable.

MFJ Enterprises, Inc. offers optional Starter Pack (MFJ-1284) for the IBM PC/XT/AT or compatible computers. The Starter Pack is supplied with the computer connecting cable for connecting your MFJ-1278.

For other computers with a 25-pin RS-232C port, you should consult your computer manual or accessory manual to see which pins it uses to send and receive data on, as well as which pin is used for signal common. Follow the computer manufacturer's recommendations for connecting the serial port to a **modem**. You may also find the technical information in this section useful.

Your MFJ-1278 is configured as Data Communications Equipment (DCE), the technical term for an RS-232C modem. Most computers are configured as Data Terminal Equipment (DTE). If this is the case for your computer, you will probably be able to simply wire pin 2 of the MFJ-1278 connector to pin 2

of your computer's RS-232C port, pin 3 to pin 3 and pin 7 to pin 7. You can provide these connections with a standard 3-wire male-to-female or male-to-male RS-232C extension cable, depending on whether your computer has a DB25S or DB25P connector.

If your computer is configured as DCE, you will have to wire pin 2 of your MFJ-1278 to pin 3 of the computer connector, and pin 2 of the computer connector to pin 3 of your MFJ-1278. Pin 7 of the computer connector will still connect to pin 7 of your MFJ-1278 serial port. Some computers may require that pin 5 of the computer serial port connector be connected to an appropriate signal. Others may require connections for pin 8 and pin 20. You can use the computer's output signals on pins 4 and 6 as shown in Fig. 2-3.

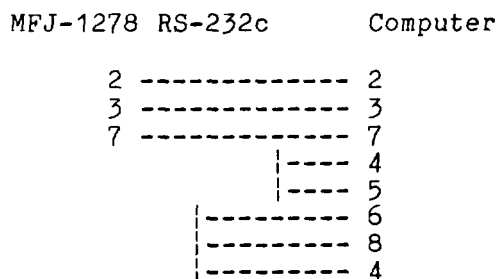


Fig. 2-3. Serial port wiring with jumpers for auxiliary signals.

Other Computers with Nonstandard Serial Ports

Computers with nonstandard serial ports must meet the following conditions.

First, the signal levels should be RS-232C compatible. The MFJ-1278 requires that the voltage levels sent from the computer be greater than about +3 volts in one state and less than about +1 volt in the other state.

Second, the polarity of the signals must conform to the RS-232C standard. This means that the low voltage state must correspond to a logical "1" and the high voltage state to a logical "0".

Third, the computer must be able to correctly receive a signal which meets the RS-232C specification. The MFJ-1278 supplies signals that meet this specification.

Make or buy a cable that provides the following connections. The computer serial port common pin must be tied to the MFJ-1278 serial port connector pin 7. The data line that sends data from the computer must be tied to the MFJ-1278 connector pin 2. The pin on which your computer receives data on must be tied to the MFJ-1278 connector pin 3.

If your computer requires any other signals, you must arrange to provide them. The documentation provided with your computer or its accessory serial port should clarify any special requirements of your port.

Terminal Software Requirements

Any software package that enables your computer to act as an ASCII terminal with an ordinary telephone modem should work with your MFJ-1278. If you have a program that you have used successfully with a telephone modem and that you are familiar with, use that program to communicate with your MFJ-1278.

If you are using a terminal program provided by the MFJ Starter Pack, proceed to the "Computer Baud Rate" section in this chapter. Follow the instruction provided by the program.

If you are not using a MFJ terminal program, then proceed with the instruction for your type of computer.

Note: Some terminal programs (such as the Apple II+ Super Serial Card) requires DCD to be asserted before they receive any characters. If this is the case, place a jumper across pin 1 and 2 of JMP 1. The DCD LED on the front panel will function normally indicating received packets.

Apple Macintosh

MFJ Starter Pack for the Macintosh (MFJ-1287) includes a terminal program and a cable to connect the MFJ-1278 to the Macintosh. If you should want to use a terminal program such as MacTerm set the options according to Table 2-3.

Table 2-3. MacTerm option settings for operation
with MFJ-1278

Compatibility	Terminal
1200 baud	VT100
7 bits/character	ANSI
even parity	UNDERLINE
Handshake Xon/Xoff	US
modem connection	80 Columns
"telephone" port	ON LINE
	AUTOREPEAT

Apple II, II+, IIe, IIC

For the Apple II family of computers with Apple or third-party serial interface cards, you may use ASCII Express Pro, Hayes Smartcom IIE and DataCapture 4.0 for the MFJ-1278. There are others which may be compatible with the MFJ-1278, but have not been tested.

Commodore C64, C128 and VIC-20

The optional Starter Pack for the C-64, C-128 and VIC-20 can be purchased from MFJ Enterprises, Inc. or from any MFJ dealer. Starter Pack includes an interface cable from the MFJ-1278 TTL port to the user I/O port on the commodore computer. A terminal program is also included. To order, specify MFJ-1282 for software on disk or MFJ-1283 for software on tape.

If you do not have the MFJ Starter Pack, then you must use the

IBM PCjr

The IBM PCjr has a built-in terminal program in the BASIC cartridge. Start this program by typing TERM. Refer to

MFJ-1278 Serial Port Pin Functions

This section describes the pins used on the MFJ-1278 RS-232C serial port connector. It is intended for users with special applications requiring hardware handshaking. This information should not be needed by most users.

Table 2-4. RS-232C Pin Designations

Pin #	Mnemonic	Name
1	FG	Frame Ground
2	TXD	Transmit Data
3	RXD	Receive Data
4	RTS	Request To Send
5	CTS	Clear To Send
6	DSR	Data Set Ready
7	SG	Signal Ground
8	DCD	Data Carrier Detect
9	---	+ 12V unregulated reference
10	---	- 12V unregulated reference

Frame Ground is provided for attachment to the chassis of the MFJ-1278 and the chassis of the attached device (computer or terminal). This pin is brought out to a feedthrough on the MFJ-1278 PC board near pin 1 of the serial connector. It is not electrically connected anywhere else on the MFJ-1278 circuit board.

Transmit Data is an input line to the MFJ-1278 on which the attached device sends data.

Receive Data is an output line from the MFJ-1278 on which the attached device receives data.

Request To Send is an input line to the MFJ-1278 which the attached device requesting clearance to transmit.

Clear To Send is an output from the MFJ-1278 signaling the attached device to send or refrain from sending data to the MFJ-1278. This line is used for hardware flow control.

Data Set Ready is an output from the MFJ-1278 telling the attached device that the MFJ-1278 is operational.

Signal Ground is the common, or return, path for all signals between the MFJ-1278 and the attached device.

Data Carrier Detect is an output from the MFJ-1278. As normally configured, DCD reflects the status of the CON LED: It is true when an AX.25 connection exists between your MFJ-1278 and another station; it is false when no connection exists. This configuration is useful when the MFJ-1278 is used with a telephone style Bulletin Board system, since the

~~AX.25 connection is always true when a connection exists.~~

5. Execute the AUTOBAUD routine by pressing the RETURN key few times in succession on your computer. The MFJ-1278 will execute the AUTOBAUD routine and set itself to the terminal program parameter. Your computer screen will display the sign-on message:

```
*:J
bbRAM:LOAD WITH DEFAULTS
|A
MFJ ENTERPRISES, INC.
MODEL MFJ-1278
AX.25 LEVEL 2 VERSION 2.0
RELEASE XXXXX (date) - 32K RAM
CHECKSUM XXX
cmd:
```

After sign-on the STA and CON on the MFJ-1278 will extinguish.

If the sign-on message fails to appear, you should check the connecting cable between and the computer and the MFJ-1278.

When you have successfully read the sign-on message from the MFJ-1278, type:

DISPLAY

followed by a carriage return. You should see a lengthy list of items on your screen. This verifies the ability of the MFJ-1278 to accept and respond to input from your computer. Your serial interface is now working.

Printer Port Connection

The parallel printer port is located on the left side of the MFJ-1278. The printer port is configured for a Centronics compatible parallel port. A cable with male DB-25 on one end and a 36 pin Centronics male connector for the printer end should be used. You may use a standard IBM parallel printer cable instead of trying to wire your own. A Printer cable for connection from the MFJ-1278 printer port to a Centronics compatible printer is available from MFJ Enterprises, Inc. Model No. is MFJ-12.

If you are using a terminal program which supports graphic printing from the computer to the printer, then you should connect the printer to the computer printer port and not to

the MFJ-1278 printer port.

If your terminal program does not support graphic printing to the computer screen and you want to print graphic: Packet, SSTV or FAX pictures, then you should connect the printer to the MFJ-1278 printer port. In this case the printer must be either EPSON or IBM graphic compatible in order to insure successful graphic receiving to the printer.

Table 2-5 Parallel Printer Port Pin Functions

MFJ-1278 DB-25

Printer Port

Name

Pin #

1	Strobe
2	Data Bit 1
3	Data Bit 2
4	Data Bit 3
5	Data Bit 4
6	Data Bit 5
7	Data Bit 6
8	Data Bit 7
9	Data Bit 8
10	Acknowledge
11	Busy
12 thru 17	No connection

printer has both EPSON and IBM graphics mode, you should try both modes to see which mode give you the best results.

In addition to being able to print weather FAX, FAX and SSTV pictures, the printer connected to the MFJ-1278 printer port can also print incoming text in all modes as it is received on the screen. This means that you can keep a log of all

the MFJ-1278 printer port. Printers without Epson compatible graphics will not be able to print Weather FAX, FAX or SSTV.

Printer Port Test

After properly connecting your printer to the MFJ-1278, you may verify its compatibility as follows:

1. Turn on your computer. Load and run the terminal program.

RADIO INTERFACING

Computer interfacing covered in the previous chapter is

This chapter describes how to connect these signals between your MFJ-1278 and your radio and how to adjust the receive and transmit audio levels appropriately. The interconnection should be planned so as to minimize pickup of stray audio and RF noise by the lines. If possible, you should set up your station with monitor speaker and be able to operate on voice without disconnecting the MFJ-1278.

Radio Ports Connection

The two radio ports on the MFJ-1278 allow both an FM radio and as HF radio to be connected at all times. You can also connect two HF radios or two VHF radios to the radio ports. Pin designation for Radio port 1 and Radio port 2 are the same. See Fig. 3-1. Switching of the radio ports on the MFJ-1278 is done by using the **RADIO** command. We will discuss radio port switching in the next chapter.

Use Fig. 3-2 to wire a microphone connector (not provided) to the 5 pin DIN cable provided. You will need to wire two radio cables if two radios are to be hooked up to the MFJ-1278.

You may obtain the specific microphone connector pin designation for your radio from the your radio's manual. **Appendix A** at the end of this Instruction Manual lists pin assignments for some of the most popular radios. The accuracy of this information is not guaranteed. You should verify this information with your radio manual.

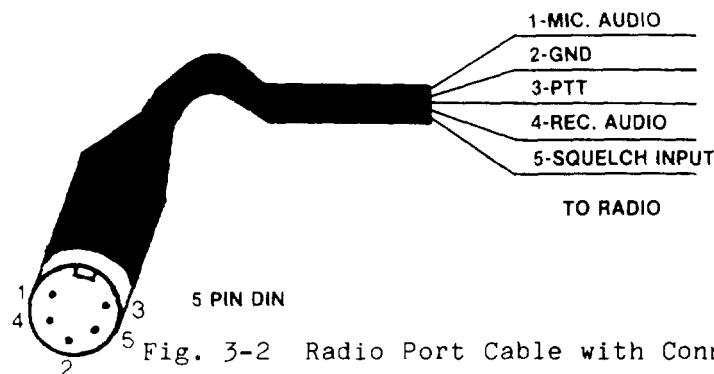


Fig. 3-2 Radio Port Cable with Connector

Two 5-pin male DIN connector cables are provided with the MFJ-1278 for wiring to the microphone connector for your radio.

CHECK THIS CABLE WITH AN OHM METER TO IDENTIFY EACH WIRE BEFORE WIRING IT TO THE MIC CONNECTOR THAT FITS YOUR RADIOS.

Handheld Radio Connection

Some HTs key the transmitter by drawing a small amount of current from the microphone input pin (see Fig. 3-3 below). Radios with this type of special keying circuit are ICOM-2AT (tm) and Yaesu FT-x09, FT-x3, FT-727 (tm) and others.

Appendix A at the end of this instruction manual provided pin designation for some of the radios. Also consult the instruction manual of your radio.

If your HT has this type of microphone input, you can wire the microphone like the one shown in Fig. 3-3 or you can remove the cover of the MFJ-1278 and install a shorting jumper at JMP L for Radio Port 1 or JMP K for Radio Port 2. Installing JMP K or JMP L will eliminate the need of soldering "Cx" and "Rx" to the microphone cable. "Cx" and "Rx" are installed on the MFJ-1278 mother board. Fig. 3-4 shows the location of JMP L and JMP K connectors. On the MFJ-1278 mother board, the "Rx" resistor for Radio Port 1 is R140 and the "Rx" resistor for Radio Port 2 is R107. If you find the your radio still would not key properly after installing JMP L or JMP K, it may be necessary for you to change the value of R140 or R107 to a smaller value.

Be sure to remove JMP K or JMP L when connecting the MFJ-1278 to another type of radio.


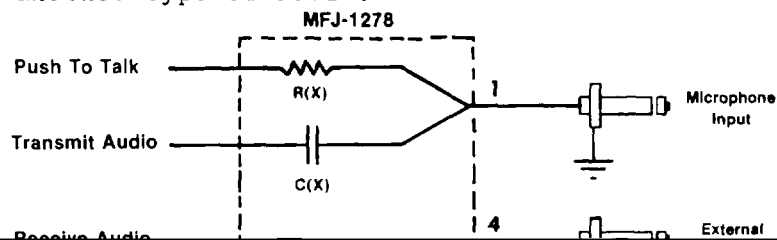


FIG. 3-3 HT Special Keying Circuit

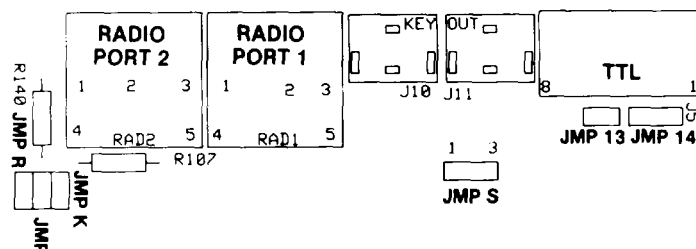

RADIO INTERFACING METHODS

The MFJ-1278 was designed to allow hook-up without any modifications to the radio or any signal level balancing devices in the cables. Two interfacing methods are presented.

Method 1: Direct Connection to Microphone and Speaker

For Method 1, shown in Fig. 3-5, the MFJ-1278's audio will be fed directly into the microphone connector or similarly connected auxiliary jack, and the output of the MFJ-1278 will be adjusted to give a proper modulation level. The receiver audio will be taken from an earphone plug or speaker jack and fed directly to the MFJ-1278. A monitor speaker can be connected to the SPEAKER jack of the MFJ-1278. This allows you to monitor the channel.

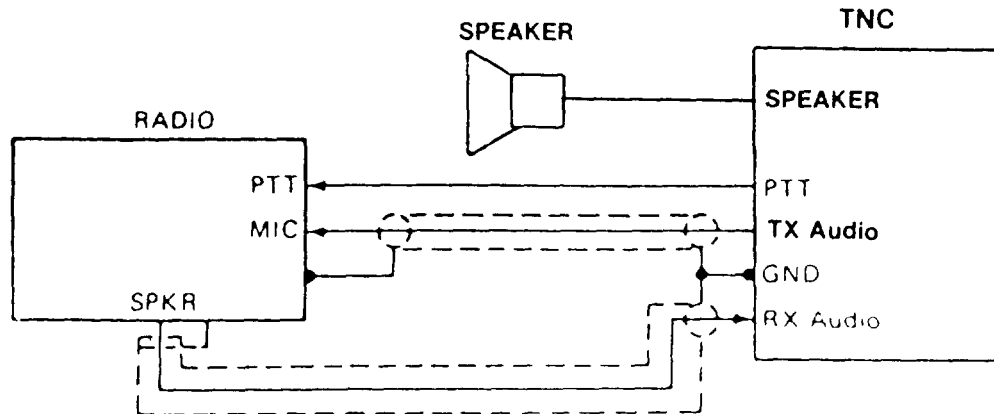


Fig. 3-5 Method One Interconnect.

The transmit audio levels for both radio ports are factory

Transmit Audio Level Adjustment for Method I Interface

1. Connect your MFJ-1278 and radio as shown in Fig. 3-5.

Setting the Receiver Audio Input Level

The modem in your MFJ-1278 is equipped with an advanced phase coherence type data carrier detector (DCD) with threshold control and a sensitive tuning indicator. These can be used in combination to set the correct receive audio level for the modem and to optimize the DCD characteristics for the various methods of operation.

With your radio in the receive mode, open the squelch control so that a steady hiss is heard on a speaker. Set the volume control to the minimum volume position. The tuning indicator on the MFJ-1278 should drift off to one side of the display and become stationary. It may drift enough to disappear off the end of the display. Slowly advance the audio output level with the volume control until the tuning indicator "springs to life" and dances around a point near the middle of the display. This is the absolute minimum audio level for marginal copy. Continue to advance the volume control until there is approximately twice as

Method 2: Accessory Jack or Interface Box Connection

If your radio has an accessory jack with PTT transmit

If your radio does not have an accessory jack and you don't wish to add a connector to your radio, you may construct a separate external interface box. This box will permit simultaneous connection of your MFJ-1278 and a microphone. A schematic of an external interface box is shown in Fig. 3-7.

An interface box similar to the one shown in Fig. 3-7 is available from MFJ Enterprises, Inc. Model No. is MFJ-1272.

Regardless of whether you use an accessory jack or an external interface box, you should use shielded wire for all signal-carrying leads. The connector types and pinouts will be determined by the connector jacks on your radio.

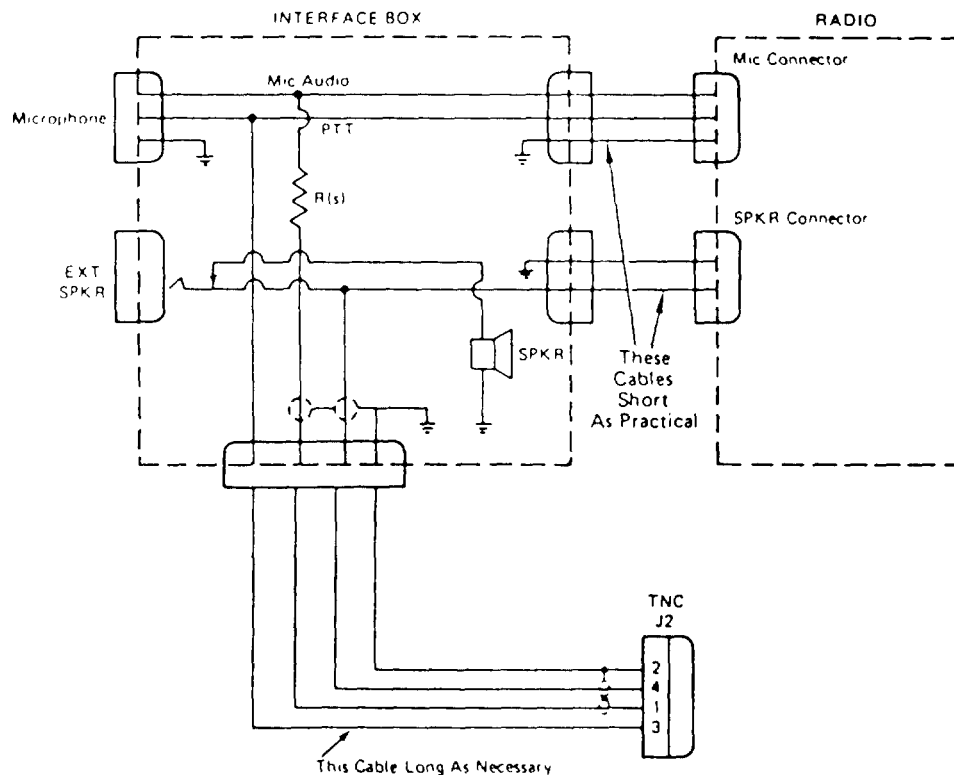


Fig. 3-7 External Interface Box

If you built the external interface box as in Fig.3-7, then follow this procedure to adjust R(s).

1. Install JMP J on the MFJ-1278 PC board.
2. Temporarily solder a variable resistor in place of R(s) Fig. 3-7. The maximum value of this resistor must be determined by experiment, but 500K should handle most cases. Connect your MFJ-1278 to the radio. Connect the microphone to the radio, or to the interface box if one is being used. Connect the radio to a dummy load and listen to the transmission with another nearby radio. Adjust R(s) for proper modulation as follow:

Transmit Audio Level Adjustment for Interface Method II

1. Turn on the MFJ-1278 and computer and start your terminal program. Enter the modem calibration procedure

4. Press the **K** key to return to receive mode and type **Q** to exit the calibration routine. You have now set your transmitter deviation to approximately the correct level. Remove JMP4 if you placed it in Step 4.
5. Carefully remove the variable resistor and measure its value. This is the proper value of R(S) for your particular radio.
6. Select the nearest standard value fixed resistor (1/4 watt is fine) and permanently install this resistor as R(S) in the interface circuit.
7. If you have access to FM test equipment, check to see that the modulation level is still within the limits of 3 to 4.5 kHz deviation. If it is not, make a final adjustment with the MFJ-1278 transmit audio level controls, R157 for Radio 1 or R158 of Radio 2.

Receiver Audio Setting

The modem in your MFJ-1278 is equipped with an advanced

produce approximately a 10% duty cycle of false DCD activity when receiving unsquelched NBFM receiver noise.

The modem sensitivity to false DCD will be affected by the bandwidth of the audio coming out of the receiver. some receivers produce wideband audio which will NOT produce any false DCD activity regardless of the threshold control setting. In this case, set the DCD threshold control to its maximum clockwise rotation. Modem performance will not be affected.

IMPORTANT NOTE: Harmonics Interference

If you experience interference from one of the harmonics of the crystal oscillator in the MFJ-1278, trimmer capacitor, C47 (near the crystal) can be adjusted to move the frequency of the harmonic.

Monitor Speaker Connection

MFJ-1278 has a built audio amplifier to provide audio for an external monitor speaker. Monitor speaker such as the MFJ-280 can be connected to the **SPEAKER** jack on the MFJ-1278. Only one speaker is needed for RADIO 1 and RADIO 2.

JMP X : Transmitting Audio
JMP Y : Receiving Audio
JMP Z : Packet Connect Tone.

For example, if you like to have the packet connect tone but do not wish to hear the racket of packet, then you should disconnect JMP X to disable the transmitted audio and disconnect JMP Y for received audio.

CW Installation

Besides being able to send and receive CW by using your computer, the MFJ-1278 expands CW operating fun by allowing you to connect an iambic paddle to the **KEY** input jack of the MFJ-1278 so you can use the MFJ-1278 as a keyer to send CW. Connect the MFJ-1278 for CW operation as follow:

DC Keying Connection

Connect a two conductor shielded cable from the GRID BLOCK or DIRECT jack of the MFJ-1278 to the keying input of your radio. The keying jacks of the MFJ-1278 accept a standard RCA phono plug. Solid state radios should use the DIRECT keying output and tube type radios should used the GRID BLOCK keying output. If you are unsure of which output to use, try both outputs. The keyout outputs of the MFJ-1278 are protected. If the wrong output is used you will notice a constant key down effect on the transmitter.

Key Paddle Connection

The KEY paddle input jack of the MFJ-1278 accepts a 3.5mm (1/8") stereo plug. (Radio Shack Part No. 274-284). DO NOT USE A MONO plug, IT WILL SHORT OUT THE KEY INPUT. A two conductor fully shielded cable should be used. Wire the tip of the plug for the dash contact and the ring of the plug for the dot contact. Be sure to use the shield of the cable for the paddle ground contact.

GETTING STARTED

This chapter will guide you through the basic operation on all the modes of the MFJ-1278. It contains the basic information required to operate Packet, RTTY, ASCII, CW, AMTOR, NAVTEX, FAX, SSTV and CW Memory Keyer.

First Steps

1. Make sure that your computer is connected to the RS-232C port or the TTL port on the MFJ-1278 according to Chapter 2.
2. Make sure that your radios are connected to the MFJ-1278 according to Chapter 3.
3. Turn on your computer. Load and run the terminal program.
4. Turn on the MFJ-1278. The MFJ-1278 will sign on with "cmd:" prompt sign. If the MFJ-1278 fails to sign-on, press the return key on your computer a few times in succession, the MFJ-1278 will sign-on as follows:

```
*:J
bbRAM:LOADED WITH DEFAULTS
|A
MFJ ENTERPRISES, INC.
MODEL MFJ-1278
AX.25 Level 2 Version 2.0
Release XXXXX (date) - 32K RAM
Checksum XXX
cmd:
```

Note: The "|A" may display as a vertical-bar and any capital letter from "A" through "J".

The first five lines are the sign-on message, which you will normally see only when you power up the MFJ-1278. The Command Mode prompt cmd: will appear when the MFJ-1278 is in Command Mode and is ready to accept your instructions. Upon sign-on the MFJ-1278 is defaulted to the VHF packet mode. Before the MFJ-1278 can be fully operational, some of the basic parameters must be set.

Basic Parameters Setup

With the MFJ-1278 sign-on and default to the VHF packet mode, you are now ready to start setting up the parameters you will use. You may be satisfied with most of the defaults for now, but a few parameters will have to be changed! Let's try entering your call sign. Type:

```
cmd:MYCALL K5FLU
MYCALL was NOCALL
cmd:
```

Type the text, MYCALL K5FLU, following the command mode prompt. Of course, you should substitute your own call sign for K5FLU. Don't forget the <CR> at the end of the line. Your call sign will be used by the MFJ-1278 as its "address." The MFJ-1278 responds by telling you the previous value of the MYCALL parameter, and gives you a new Command Mode prompt.

Now try typing just the command by itself:

```
cmd:MYCALL
```

MFJ-1278 will respond with:

```
MYCALL K5FLU
```

You can see the current value of most parameters by typing the command that sets the parameter followed by just a <CR>. This verifies that the MFJ-1278 accepted your call sign.

The next section describes the commands you will use to configure the MFJ-1278 for proper text display for your particular computer. You may not use these commands again unless you change computers or terminal programs.

Serial Port Configuration

This section describes the commands you will use to set up the MFJ-1278 to work best with your computer.

Parity and Word Length

If you are using one of the optional starter packs by MFJ Enterprises, Inc. then you should follow the instructions given by the terminal program documentation with the starter pack. If you are not using the MFJ starter pack then you should use the following instructions to set the parity and word length for the MFJ-1278.

If messages from the MFJ-1278 appear garbled, with incorrectly displayed characters, you may need to change the MFJ-1278's serial port parity and word length. (We assume that you have set the baud rate correctly. See Chapter 2 if the baud rate needs to be changed.) The MFJ-1278's default value is 8 bits and no parity. If your computer receives 8 bits as data, you may have to set space parity, since text may otherwise be interpreted as graphics or other special characters. To set 8 bits, space parity, use the following combination:

AWLEN 8	(8-bit words)
PARITY 0	(no parity bit)

For wordlength of 7 bits, even parity, set

MFJ-1278 is also echoing them. In this case, set duplex to FULL on your terminal to stop the terminal from echoing characters to your screen.

New Lines and Line Wrapping

If everything displayed appears to be double-spaced, your computer is adding an extra linefeed (<LF>) whenever it displays a carriage return (<CR>). Set AUTOLF OFF to keep the MFJ-1278 from also adding an <LF>. If you change equipment you may have to set AUTOLF ON to restore the MFJ-1278's automatic linefeeds.

The screen-width parameter is set by default to 80, the width of many CRT displays. The MFJ-1278 will send an extra <CR> (or <CR> <LF> if AUTOLF is ON) when 80 characters have been displayed on a line. If your computer does not automatically break long lines, you will need to set the screen width to the width of your display. For example, for a computer using a TV set for a display, you would set SCREENLN 40. If your computer does automatically break long lines, you should set SCREENLN 0 to disable this feature on the MFJ-1278. Otherwise, you will get two <CR>s when the line wraps around.

A few computers will frequently lose the first characters of a line when several lines are typed in rapid succession, for example, in the sign-on message. You can give the computer more time between lines by setting NUCR ON (delay after <CR>), or NULF ON (delay after <LF>). The delay is adjusted by NULLS, which sets a number of character-times for the delay.

With the basic parameters set up which enable the MFJ-1278 to be able to communicate with your computer, we can now discuss some basic functions and features of the MFJ-1278.

various modes of operation. These modes of operation include VHF Packet, HF Packet, AMTOR, VHF RTTY, HF RTTY, VHF ASCII, HF ASCII, CW, Modulated CW, CW Memory Keyer, FAX (including Weather FAX), SSTV with gray scales and monitoring of NAVTEX.

Each set of modem components is independently calibrated for each mode of operation. Modem re-calibration is not required for receiving or transmitting when switching among any of

Operation Mode

Verifying Operation Status

Upon power up, the MFJ-1278 is defaulted to VHF Packet mode and the radio baud rate is defaulted to 1200 baud. Radio port connection is defaulted to radio 1. You can verify the operating status of the MFJ-1278 at any time by using the command MODE after the display of the CMD: prompt. To check operation mode, type:

MODE <CR>

The MFJ-1278 will respond with modem status display lines followed with the cmd: prompt.

Mode Switching With the MODE Command

Since the MFJ-1278 is a multi-mode controller, you will need to familiarize yourself with the commands for changing from one operating mode to another.

The MFJ-1278 provides an easily used command to change the mode of operation. The MODE command allows you to enter any operation mode and select a desired radio baud rate and modem to be used. Table 4-3 lists the valid codes which can be used by the MODE command. The format for the MODE command is:

MODE xx,bbbb,m <CR>

Where xx is a 2 letter operation mode code as listed in Table 4-3, bbbb is the desired baud rate or speed, and m is the desired modem as listed in Table 4-1. If no modem is specified then MFJ-1278 will select the default modem for the selected mode using the modem as listed in Table 4-1. Most of the time, the defaults will be sufficient so the baud rate and modem need not be specified. So in order to specify HF RTTY operation at the default baud rate of 45 baud and using the default narrow shift modem, for example, you would type:

MODE HB <CR>

Any of the three parameters may be changed without affecting the other two. for example, to change the baud rate to 110 baud while using RTTY with the same modem, you would type:

MODE HB,110 <CR>

Similarly, to select the wide shift modem without changing either the operating mode or the baud rate you would type:

MODE HB,110,V <CR>

If you select an invalid code or baud rate, MFJ-1278 will respond with an error message:

? BAD
cmd:

Note that with the error message, the MFJ-1278 has changed to default settings.

On CW, MCW and Memory Keyer operation modes, instead of selecting a baud rate you will select CW sending speed by entering a number from 5 thru 99. If you do not select a speed, the last selection will be used. The default value is 20 WPM.

Table 4-3: MODE Command Codes and Baud Rates.

MODE CODE	OPERATION MODE	DEFAULT BAUD RATE	SELECTABLE BAUD RATE/SPEED/FORMAT
VP	VHF Packet	1200	300, 1200
HP	HF Packet	300	300
VB	VHF Baudot RTTY	45	45, 50, 57, 75, 100, 110, 150, 200, 300
HB	HF Baudot RTTY	45	45, 50, 57, 75, 100, 110, 150, 200, 300
VA	VHF ASCII RTTY	110	45, 50, 57, 75, 100, 110, 150, 200, 300
HA	HF ASCII RTTY	110	45, 50, 57, 75, 100, 110, 150, 200, 300
FX	FAX	3(120L/M)	60, 90, 120, 180, 240, 360, 480 (Lines/Min.)
CW	CW/ Mem. Keyer	20	5 WPM thru 99 WPM
MC	Modulated CW	20	5 WPM thru 99 WPM
TV	SSTV	1 (8.5S)	8.5, 12, 17, 24, 36 (seconds)
AM	AMTOR/NAVTEX	100	100

Radio Port Switching

MFJ-1278 provides two independent radio ports (Radio A and

BUFKEY can only be used in the CW/MCW mode. It is not valid for RTTY or ASCII modes. For RTTY and ASCII modes you will press a "CTRL-T" and a buffer number to initiate a buffer transmit and you will press a "CTRL-R" to revert the MFJ-1278 to the receive mode.

If you are using the MFJ-1278 with MFJCOM, IBM terminal program, you must change the BUFKEY value of "TAB" (9) key to "\" (\$5C) key.

Buffer Serial Number

If the memory buffer text includes a # sign, the MFJ-1278 will replace the # with a number each time that buffer is transmitted. The number is the current value of the serial number counter, SERIALNO. Once used, this serial number counter value is incremented by one up to a maximum of 65535, where the counter rolls over to zero.

If for any reason the serial number must be changed, you may return to the CMD: command prompt and enter the new serial number by typing:

CMD:SERNALNO ##### <CR>

Where ##### is the desired serial number from 0 to 65535.

Memory Repeat and Buffer Repeat Time

The buffer 0 repeat time is set by using the command BUFTIME followed by a number from 0 to 65535 seconds. BUFTIME of 0 seconds represents no repeat after Buffer 0 is transmitted. BUFTIME is usable in CW, MCW and Memory Keyer modes. BUFTIME is not effective for memory buffers 1 thru 9.

BUFTIME is the TOTAL time for one cycle of Buffer 0 message. This means that if your buffer message is 10 seconds long, then you must set the BUFTIME longer than ten seconds. For example, if you want a 5 second delay between the end of the message and the beginning of message to be repeated, then add 5 seconds to the total message time. If your message is

Memory buffer 0 will repeat every 5 seconds. To stop memory buffer 0 from repeating, set BUFTIME TO 0.

If BUFTIME is set to a nonzero value, the MFJ-1278 will automatically release the PTT line and revert to the receive mode between repeats. This allows you to monitor the frequency. If the MFJ-1278 is not interrupted during the pre-set delay time, it will continuously repeat until buffer 0 is interrupted.

Chaining the Memory Buffers

All ten memory buffers may be chained together in any order while being transmitted. For example, you may transmit memory buffer 0, memory buffer 2 and memory buffer 5 together in one transmission. To achieve this, you should program the message in memory buffers as follows:

From CMD: command prompt, type:

```
CMD:BUFO XXXXXXXXXXXX....XXXXX CTRL-T 2 <CR>
CMD:BUF2 XXXXXXXXXXXX....XXXXX CTRL-T 5 <CR>
CMD:BUF5 XXXXXXXXXXXX....XXXXX <CR>
```

Where XXXX is the desired text you wish to program into the memory buffers.

In the example shown above, whenever Buffer 0 is transmitted, the MFJ-1278 will also transmit Buffer 2, then Buffer 5. If you want the MFJ-1278 to transmit Buffer 0, Buffer 2 and Buffer 5 repeatedly, then add a "CTRL-T 0" to the end of the Buffer 5 content.

Note: If BUFTIME is a non-zero value, MFJ-1278 will automatically release the PTT line and revert to the receive mode between repeats. This allows you to monitor the frequency. If the MFJ-1278 is not interrupted during the pre-set delay time, it will continuously repeat until buffer 0 is interrupted.

Tuning Indicator

Your MFJ-1278 is equipped with a tuning indicator which is sensitive, very accurate and extremely useful not only for tuning to signals for optimum reception but also for filter alignment and audio level indication.

OPERATION: PACKET

VHF Packet

If you are not familiar with packet operation, then you can learn quite a bit about it with the MFJ-1278 without actually transmitting anything. For your first experiments, the MFJ-1278 will be "talking to itself," allowing you to become familiar with it before you go on the air.

If you are already familiar with the packet operation, then you may not want to perform this exercise. In this case go the other modes of operation in this chapter.

Disconnect your radio from the MFJ-1278 and turn off the MFJ-1278. Install the digital loopback jumper, JMP10. The analog loopback jumper, JMP7, should not be installed. Connect your computer to the MFJ-1278 with your serial cable. Turn on the computer and start your terminal program.

A Connecting and Disconnecting Exercise

Packet radio QSOs are started by a connect process, which sets up the "handshaking" between the two stations that insures error-free communications. QSOs are terminated by a disconnect process, which leaves both stations free to start new QSOs. Packet QSOs can also make use of digipeaters, other packet stations which can automatically relay packets from one station to the other over a specified route.

To see how this works, you can have the MFJ-1278 connect to itself. Since you have set the MFJ-1278 up for digital loop-back, it will receive all packets that it sends. Try the following:

```
cmd:FULLDUP ON
cmd:CONNECT K5FLU
*** CONNECTED to K5FLU
```

replacing K5FLU with your own call sign. The MFJ-1278 generates packets initiating and confirming the connection. The packets aren't actually converted to audio signals and transmitted over the radio, but they are otherwise just like packets you will be transmitting later on.

The *** CONNECTED to message tells you that the connection was successful. You should also notice that the CON LED has lit up and that you do not see a new cmd: prompt on the next line. You are now in Converse Mode, ready to start talking. Try it. Type your message, ending the line with a <CR>.

Hello, there.

Hello, there.

The <CR> causes your message to be put into a packet, or "packetized," and transmitted. (We explain in the next

disconnect is complete:

```
cmd:DISCONNE
*** DISCONNECTED
```


An actual QSO might be terminated by the other station, of course. In that case, you would see the *** DISCONNECTED message without having issued the command.

You have just performed the basic operations of any packet QSO. You established a connection with the desired station to begin the QSO, sent and received some messages, and disconnected from the station at the end of the QSO.

Digipeating

You may wish to have a QSO with another packet station that is beyond your direct radio range. If a third packet station is on the air and both you and the station you want to talk to are in range of this third station, that station can relay your packets. You set up the packet routing when you initiate the connection. The MFJ-1278 will then automatically include the routing information in the packets it sends.

The diagram below shows an example situation in which digipeating is useful.




You are station K5FLU, and you want to have a packet QSO with N2WX. There is a mountain in the way and you are not in simplex range of each other. However there is a station located on the ridge, AD7I, which is in range of both you and N2WX.

You direct the MFJ-1278 to set up a connection to N2WX using AD7I as an intermediate digipeater as follows:

```
cmd:CONNECT N2WX VIA AD7I
```

You can specify a routing list of up to eight intermediate stations. For example, consider a modification of the example above:

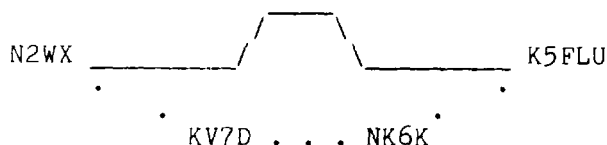

AD7I has turned off his station, but you can contact N2WX by going around the mountain through NK6K and KV7D. This time you issue the connect command like this:

```
cmd:CONNECT N2WX VIA NK6K, KV7D
```

You specify the digipeaters in the order you would encounter them going from your station to the station to which you wish to connect.

Your station can also act as a digipeater for other stations. This doesn't require any special actions on your part -- the MFJ-1278 will do everything automatically. If your station is digipeating, you may occasionally notice your transmitter keying during lulls in your own conversations.

Unsuccessful Connections

Sometimes you will initiate a connect sequence that can't be completed. The station may not be on the air, or it may not be within range of your station. You may have even mistyped the other call sign. If the MFJ-1278 does not get a response to its first connect packet, it will try again. You can control the number of attempts the MFJ-1278 will make with the command **RETRY**. The default number of retry attempts is 10. If the MFJ-1278 doesn't get an answer after this number of transmissions, it will give up and display the message

```
*** retry count exceeded
*** DISCONNECTED
```

The retry count is also used once the QSO has started. Each transmission sent to the other station is "acknowledged," or ACKed by the other station, and vice versa. The ACK means that the packet was received and that the CRC checksum indicated that it was received without errors. This is the means by which packet radio can ensure error-free communications. Sometimes a packet won't be received correctly by the other station, either because of accidental interference from another packet station (a collision), or because of other channel noise. If the MFJ-1278 doesn't get an ACK soon enough, it retransmits the packet and increments the retry count. If the count set by **RETRY** is exceeded, the

MFJ-1278 will automatically disconnect and display the same message:

*** retry count exceeded
*** DISCONNECTED

The automatic disconnect feature keeps a MFJ-1278 from indefinitely retransmitting a packet and tying up the channel under hopeless conditions. For example, an intermediate digipeater might have been shut down, or the RF channel might have deteriorated to the point of being unusable. The other operator might have even turned off his station without disconnecting. If you are operating under special conditions, such as a marginal HF channel, you can set **RETRY 0** to disable all automatic disconnects (the retry limit is never reached).

Monitoring Channel Activity

In addition to displaying messages from the station you are connected to, the MFJ-1278 can allow you to monitor other packet activity on the channel. You can "read the mail,"

If there are several digipeaters, or if the message lines are long, the display may be difficult to read. You can put the address header on a separate line from the text by setting HEADERLN ON:

WB6YMH>WDOETZ,KV7B:
Hello, Bill!

Ordinarily, the MFJ-1278 will stop displaying monitored packets if you connect to another station, permitting you to converse without interruption. If you want to monitor activity while connected to a packet station, set MCON ON.

To display a list of stations heard since the last time your MFJ-1278 was powered up, type

cmd:MHEARD
AD7I
WA7GXD
N2WX
NK6K
KV7B*

The last several stations whose packets were heard by your MFJ-1278 are displayed. The entry "KV7B*" means that KV7B

MFJ-1278 should glow steadily for the duration of the transmission. You can work through the remainder of the examples in this chapter while you try out the MFJ-1278 on the air.

Starting the QSO

You are ready to initiate a connect. For the sake of example, we will continue to use K5FLU in place of your call sign, and we will use WBOQRP for your friend's call. Make sure you are in Command Mode, and type

```
cmd:CONNECT WBOQRP
```

After a moment you should see the message

```
*** CONNECTED to WBOQRP
```

and you will be in Converse Mode. Your friend will see the message

```
*** CONNECTED to K5FLU
```

and he will also be in Converse Mode. You have begun your first QSO.

If you have trouble connecting, make sure your microphone drive level is set properly, as described in Chapter 3. It may be helpful to have an experienced packet operator listen to your transmissions and monitor with his TNC. You can also try the following procedure. Both you and your friend should set MONITOR ON, enter Converse Mode and send some packets. Each station should display packets sent by the other. If only one station is "hearing" properly, you can concentrate on the modulator and transmitter of that station and the demodulator and receiver of the other station. You can try experimenting with the TXDELAY timing parameter for the sending TNC. Set TXDELAY 64 for a long delay. If this solves the problem, you can back off to the smallest value that works consistently.

Exchange several messages to get a feel for this new mode. If you monitor the radio transmit indicators and listen to the speaker audio from the two rigs, you will have a better idea of what is happening. Your radio will be inactive most of the time, even while you are actually typing. When you get to the end of a line and type a <CR>, your radio will be keyed briefly and your friend will hear a "brrrraaaap" on his speaker. As your message is displayed on his computer, his radio will be keyed for an even shorter time and you will hear a "brrraap" on your speaker. This is the ACK, or packet acknowledgment coming back. The MFJ-1278 takes note

that the packet was received correctly, but nothing is displayed on your screen.

Digipeating

Now that you are on the air, you and your friend can try out the MFJ-1278's digipeating capabilities. This is actually more interesting if you have at least three stations participating, but you can get the feel for it with two stations.

Return to Command Mode and disconnect from the other station:

```
<CTRL-C>
cmd:DISCONNE
*** DISCONNECTED
```

Now issue the following command.

```
cmd:CONNECT K5FLU VIA WBOQRP
```

As before, substitute your call for K5FLU and your friend's call for WBOQRP. You are requesting a connect to yourself, as you did before in digital loop-back mode, but this time you are using a sort of RF loop-back. You transmit packets to your friend's TNC, which relays them back to you. When the connection is established you will see

```
*** CONNECTED to K5FLU VIA WBOQRP
```

and you will be in Converse Mode. Your friend won't see anything displayed on his computer and his TNC's state won't be affected at all by your QSO. In fact, your friend could issue this connect request,

```
cmd:CONNECT WBOQRP VIA K5FLU
```

and you can carry on two separate conversations completely independently. Monitor the radio transmit indicators and listen to the speaker audio. See if you can follow the packets and the acknowledgments back and forth.

Monitoring on the Air

This is a good time to try out the MFJ-1278's monitor functions. While you and your friend are separately connected, type


```
<CTRL-C>
cmd:MONITOR ON
cmd:MCON ON
cmd:CONVERS
```

You will be able to see both your "conversation" and your friend's conversation. Also try HEADERLN ON and MHEARD.

Special Input Characters

The MFJ-1278 has a number of special characters that can be used to control its actions. Many of these special characters can be used to "edit" commands and packet text as they are entered. These features can all be customized to suit you and your computer. Most of the special input characters we will describe are active in both Command Mode and Converse Mode; the exceptions will be noted.

The character used to return to Command Mode from Converse Mode is by default a <CTRL-C>. (Sending a BREAK signal also works.) This character does nothing in Command Mode, so if you accidentally enter it twice you won't mess up the next command line. You can change the Command Mode entry character with the command COMMAND. This is one of several commands that set special character functions. You can choose any character for this function, by entering the ASCII character code for the key. For example, you can use a <CTRL-E> to enter Command Mode by setting

```
cmd:COMMAND 5
was          $03
```

The MFJ-1278 displays the previous value in hex, and you can also enter character codes in hex if you prefer. All of the special characters described below can be changed in the same way as COMMAND.

We have already mentioned that you can erase mis-typed characters by typing the <BACKSPACE> character. You can change this character with the command DELETE. If you set DELETE ON, you can erase characters by typing the <DELETE> character; setting DELETE OFF returns to using <BACKSPACE>. You will probably want to use the same key that your computer normally uses to rub out characters. <BACKSPACE> is more commonly used than <DELETE> by personal computers. If you aren't sure whether your rubout key produces <DELETE> or <BACKSPACE> characters, you can try both settings of the DELETE command and see which works.

When you rub out a mis-typed character, the MFJ-1278 will attempt to correct the screen display. This will work for most computers as well as display-type terminals. It won't

work for hardcopy-type terminals or possibly with a few computers. If your display doesn't look right after you rub out a character, try setting **BKONDEL OFF**. The MFJ-1278 will not try to correct the display but will indicate the rubout with a "\" character (<BACKSLASH>). You can restore display correction by setting **BKONDEL ON**.

If you make several mistakes in a line, or if you change your mind, you may want to cancel the whole line rather than rubbing out the characters one at a time. You can cancel the line by typing <CTRL-X>. The MFJ-1278 will display a <BACKSLASH> followed by <CR>. If you are in Command Mode, you will see a new prompt:

```
cmd:Hi, John, how are you?<CTRL-X>\
[You started typing text while in Command Mode.]
cmd:CONVERSE
Hi, John, how are you?
```

The cancel-line character can be changed to any ASCII character by the command **CANLINE**.

If you have changed your input by rubbing out and retyping

"send-packet" function except at the actual end of the packet. You can include any character in a packet including all special characters by prefixing it with the pass character, <CTRL-V>. For example,

I wasn't at the meeting.<CTRL-V><CR>
What happened?

Ordinarily, this message would be sent as two packets. By prefixing the first <CR> with <CTRL-V>, the operator sends it all at once, but maintains the <CR> in the text. The pass character can be changed to any ASCII character by the command PASS.

We will discuss operation of packet in more detail in the next chapter. For now let us discuss the operation of other

HF Packet Basic Operation

The requirements for optimum performance with a typical HF or OSCAR 10 path are very different compared to local VHF FM environment. Lower signal to noise ratios require lower baud rates, noise spikes and fades require shorter packet lengths, and a higher rate of false carrier detects lowers the total usable dynamic range in the audio input. The MFJ-1278 hardware and software are configured to improve throughput in these environments. The MFJ-1278s settings of MAXFRAME and PACLEN provide the possibility of several continuous frames of long data length. For HF operation at

is illuminated, you are tuned in and you should be able to copy the packets.

Each bar on the tuning indicator represents about 10 Hz. Thus, if a packet comes through and you are 4 bars off, retune your transceiver 40 Hz in the indicated direction. The direction depends on the sideband you selected and the manner in which you have the tuning indicator oriented. One or two tries will quickly tell you which way to go! Bars to the left of center indicate you should tune higher, while the other side of center means to tune lower.

Many BBS station forward traffic on HF at the above frequencies. Call CQ a couple KHz away from such channels. If you can't raise anyone, call CQ on one of the above frequencies, **but QSY immediately after establishing contact!** Be careful on 20 meters especially that you don't operate +/- 2KHz around 14.100 MHz (you will cause interference to propagation beacons and give packet a bad name...)

Other HF Operation Hints:

1. Try to keep all packets below 80 characters in length.
2. Set MAXFRAME to 1. This will minimize transmission time.
3. Avoid multiple connections and digipeated packet operation.
4. Qsy away from the standard calling frequencies as soon as possible.
5. Set FRACK to a sensible long value.

More detail on HF packet operation is discussed in the next chapter in this instruction manual.

OPERATION: CW

The MFJ-1278 provides many unique features in the CW mode that are not found in other multi-mode controllers.

The MFJ-1278 can be used to directly key your CW transceiver for normal CW operation. The MFJ-1278 can accommodate either positive (direct) or negative (grid block) keying voltages. The MFJ-1278 can also be used for code practice on VHF FM radios in the modulated CW (MCW) mode. This mode holds the radio PTT line down and feeds keyed audio into the microphone input.

Morse code can be sent by using the computer keyboard or by using a ~~key paddle~~ connected to the "CW Key-In" of the

MFJ-1278 supports all Alpha and Numeric characters. It also will transmit and receive punctuations and major prosigns as listed in Table 4-4 below:

Table 4-4: CW Prosigns and Punctuations

PROSIGNS	ASCII CHARACTER Keyboard Symbol	PROCEDURE	
SK	*	End of Work	
AS	&	Wait	
AR	+	End of Message	
BT	=	Break	
SN	!	Understood	
KA	%	Signal Starting	
K	K	Invitation to Transmit	
DN	/		
KN	(	Response from Contacted Call Only	
PUNCTUATIONS			
,	COMMA	:	COLON
.	PERIOD	;	SEMI-COLON
?	QUESTION MARK	'	APOSTROPHE
\$	DOLLAR SIGN	-	HYPHEN
(	LEFT PARENTHESIS	"	QUOTATION

Once the incoming signal is properly tuned, the AUTOTRAC feature of the MFJ-1278 will automatically LOCK and TRACK the speed of the signal. AUTOTRAC is defaulted to ON for the MFJ-1278. If the speed of the received signal changes greatly, the MFJ-1278 will automatically initiate a LOCK to the new speed and continue tracking the signal. Note that only a large change of speed will cause the MFJ-1278 to initiate a LOCK. The MFJ-1278 will simply track the speed if the change is small. If the CWSPEEDMatch is ON when a LOCK takes place, then the newly locked speed also becomes your new transmit speed. See CWSPEEDMatch command for further

The CWSEndch (nnn) command provides user more flexibility in controlling how CW/MCW will be transmitted from keyboard or by using the key paddle. CWSEndch is only effective for CW and MCW modes.

To have more control over when pending transmit characters are sent, enter it as the new CWSEndch value. For example, setting nnn to \$02 will cause the MFJ-1278 to buffer CW characters for transmission until a CTRL-B (or CTRL-R which always transmits the buffer) character is typed.

If nnn is left at the default value of 255, the MFJ-1278 will transmit everything right away, without waiting for a space or CARRIAGE-RETURN. Note: If you are using a terminal program such as "PROCOMM" for IBM PC/XI/AT that buffers the transmit data, then a CARRIAGE-RETURN will be needed to transmit.

The MFJ-1278 employs full CW break-in in CW/MCW transmitting. Users do not have to press Ctrl-R to force the MFJ-1278 to receive or to press Ctrl-T to force the MFJ-1278 to transmit. MFJ-1278 will always go back to receiving mode at the end of each transmission. CW break-in is effective for both CW and MCW mode.

Transmitting from Memory Buffers

The BUFKEY (nnn) command is installed to allow the user to program a single key to transmit a memory buffer. BUFKEY is defaulted to the "TAB" key (9). Wherever memory buffer feature is used in CW or MCW mode, user can transmit any buffer (0-9) by pressing the "TAB" key followed with a buffer number (0 thru 9). In CW/MCW mode, once the buffer message is transmitted, MFJ-1278 will revert to receive mode automatically without a "CTRL-R" been issued. In RTTY and ASCII modes a "CTRL-R" is needed at the end of the buffer transmission to revert back to receive. Also a "CTRL-T" must precede BUFKEY to transmit.

Note: If you are using MFJCOM terminal program, you will not be able to use the "TAB" key as the BUFKEY. Change BUFKEY to another key on the keyboard. See BUFKEY command

equal to a weight factor of 0 (WEIGHT 0). Select a number from 1 to 127 to INCREASE the dot/space ratio. Select a number from 128 to 255 to DECREASE the dot/space ratio (weight). To change the weight, you would type:

WEIGHT ### <CR>

Where ### is a number from 1 to 127 to increase weight, or from 128 to 255 to decrease weight.

Radio Tune

The MFJ-1278 lets you tune your radio with the TUNE command. TUNE command must be issued from command mode. The TUNE command can be used in any MFJ-1278 operating mode.

TUNE command activates the PTT line for 30 seconds. After 30 seconds MFJ-1278 will automatically return to command mode. To abort tuning before 30 seconds, press any key on the keyboard.

Random Code Generator

If you want to improve your CW proficiency, you will find the CW Random Code Generator helpful. The CW Random Code Generator can be invoked by using the RANDOMCW command. Pseudo random code can be generated by the MFJ-1278 in two formats. Normal CW and Farnsworth CW. The MFJ-1278 uses the setting of the FARNSWOR command to determine which format to send when RANDOMCW is turned on. To end CW random code generation, type:

CONTROL-C

to return to command mode and then type:

RANDOMCW OFF <CR>.

CW random code speed is set by using the MSPEED command described above.

Many find training for CW tests with a FARNSWORTH method of code generation more valuable. It teaches letter recognition at a speed fast enough to avoid the common learning "plateau". Some people have trouble passing the plateau as they increase their code speed because as the CW speed is increased, they must relearn the sound of the letters.

To select the Farnsworth method of random code

generation, set the FARNSWOR command to ON before entering the RANDOMCW mode. When FARNSWOR is ON the MFJ-1278 transmits CW characters generated by random code generator, keyboard and the contest keyer using 15 words per minute timing for code elements (dots and dashes) but increases the inter-character spaces to cause the text to be sent at the slower selected rate.

When FARNSWOR is turned OFF, all code elements are sent at the selected speed.

Setting Up the MFJ-1278 for Code Practice

You can monitor the random code sent by the MFJ-1278 without a radio connected. This can be done by attaching a small speaker to the "SPEAKER" jack in the back of the MFJ-1278.

Note: If a radio is connected and you do not wish to transmit the random code, the radio should be turned OFF. MFJ-1278 will key PTT line and the keying output is active while RANDOMCW is ON.

Under the cmd: command prompt, type:

MODE MC,## <CR> (## is the desired code speed)

The MFJ-1278 will respond with the "Modem Status" display, verifying the operation mode, and cmd: prompt will appear. Next type:

RANDOMCW ON <CR>,

type:

K <CR>,

then type:

Ctrl-T.

MFJ-1278 will generate 5 letter groups and display them on the computer screen. If you do not wish to see the characters as are sent, you can turn off your computer screen. You can then turn on the computer screen once you finish copying the code and compare the result.

To stop the random code sending, type:

Ctrl-R.

To start the random code again, type:

Ctrl-T.

To exit random code practice, type:

Ctrl-C

MFJ-1278 will return to cmd: command prompt. Turn off random code by typing: RANDOMCW OFF <CR>.

OPERATION: CW CONTEST MEMORY KEYS

For CW enthusiasts who like to use a key paddle to send CW, the MFJ-1278 provides an input for an iambic key paddle. See CW KEY PADDLE INSTALLATION in chapter 3 in this MFJ-1278 manual for installation of your iambic key paddle.

Sending CW with External Key Paddle

Key paddle generated CW can be sent from 5 WPM to 99 WPM.

The key paddle transmission speed defaults to 20 WPM. Transmit speed can be set by using MSPEED. To set the MFJ-1278 to 15 WPM, you would type:

MSPEED 15 <CR>

Be sure you are in command mode when issuing the MSPEED command.

Since it is always a good idea to match your transmit CW speed to the person you are talking to, the MFJ-1278 provides another way to set the CW transmit speed, the CWSPEEDM command. The CW speed matching feature causes your MFJ-1278 to adopt the speed of the received CW at it's transmit speed. This is the same CW speed that was last locked in through AUTOTrac or the use of the CW lock command, CONTROL-U.

The CWSEndch (nnn) command provides user more flexibility in controlling how CW/MCW will be transmitted from the key paddle. CWSEndch is only effective for CW and MCW modes.

When sending CW with key paddle CWSEndch should be left at the default value of 255. MFJ-1278 will transmit everything right away. Once the CW transmission is completed, MFJ-1278 will revert to receive mode automatically.

Buffer transmission in the Memory Keyer Mode is the same as in the CW mode. Weighting can also be set by the WEIGHT command as described above in the CW mode section.

OPERATION: MODULATED CW (MCW)

The MFJ-1278 allows the transmission of CW code practice over a VHF FM radio by means of Modulated CW (MCW). When using Modulated CW, the MFJ-1278 will key the PTT line of the Radio port and send a keyed audio tone to the microphone input of your radio. Radio port 1 or 2 may be used for MCW operation.

You do not have to rewire the Radio cable when operating Modulated CW. You can use the same cable that you use for the other modes of operation.

To enter MCW mode type:

MODE MC <CR>

The MFJ-1278 will respond with a mode status line, then the command prompt will display.

Operation of MCW is the same as in standard CW. Please refer to "CW OPERATION" for further details.

OPERATION: BAUDOT RTTY & ASCII

The MFJ-1278 modems can be configured with the mode command to copy all shifts including 170, 425 and 850 Hz shift. The MFJ-1278 will transmit and receive RTTY at speeds of 45, 50, 57, 75, 100, 110, 150, 200 and 300 baud. In ASCII mode, the MFJ-1278 will transceive at speeds of 45, 50, 57, 75, 100, 110, 150, 200 and 300 baud.

The MFJ-1278 transmits both wide shift for VHF RTTY/ASCII and narrow shift for HF RTTY/ASCII. Wide shift VHF RTTY/ASCII is a standard 850 Hz shift with mark and space tones of 2125 Hz and 2975 Hz respectively. Narrow shift HF RTTY/ASCII is 200 Hz shift with mark and space tones of 2110 Hz and 2310 Hz respectively.

In RTTY mode, the MFJ-1278 will receive and transmit both the American Western Union and the internationally recognized CCITT character set. In ASCII mode MFJ-1278 will transmit and receive 7 bit ASCII code.

The RXINVERT and TXINVERT commands allow the MFJ-1278 to transmit or receive RTTY/ASCII in the standard MARK for HIGH tone or in the inverted, MARK for LOW tone mode.

The MFJ-1278 also allows you to transmit from any one of the ten memory buffers when in one of the asynchronous modes. Memory buffer programming and use are the same as for CW operation.

Setting Up for ASCII and RTTY Operation

From command mode, you can set the MFJ-1278 into the desired RTTY or ASCII mode by using the MODE command. Type:

MODE ## <CR>

Where ## is the two letter code for the desired RTTY or ASCII mode.

Code designations for RTTY and ASCII modes are as follow:

VHF	RTTY	=	VB
HF	RTTY	=	HB
VHF	ASCII	=	VA
HF	ASCII	=	HA

When no baud rate for RTTY or ASCII mode is specified, the MFJ-1278 will select the default rate of 45 baud for all RTTY and 110 baud for ASCII modes. You can select a desired

speed by typing the baud rate after the two character code. For example, to enter 110 baud VHF Baudot RTTY, you would type:

MODE VB,110 <CR>

Note: The only baud rates that you can select are those the MFJ-1278 is capable of receiving and transmitting. Selecting an illegal baud rate will cause the MFJ-1278 to respond with an error message, such as:

bad?

In this case the MFJ-1278 will change to default settings and return to the command mode.

RTTY and ASCII Receiving

After properly setting the MFJ-1278 to the desired RTTY or ASCII mode, type "K" on the computer keyboard to enter CONVerse mode. The STA LED on the MFJ-1278 will light. MFJ-1278 is ready to receive RTTY or ASCII signals tuned in by your radio.

Set the volume of your radio for normal listening level and then tune the radio until you hear a desired signal to be decoded. Fine tune your receiver until the tuning indicator is centered. If the signal is tuned properly, the DCD LED will light and MFJ-1278 will start to decode the signals.

If the displayed text appears to be garbled, your receive speed may be incorrectly set or the receiving signal could be encrypted. If you suspect that the receiving signal is encrypted, you can use the RBITMASK command to match the inversion pattern of the signal.

If the speed of the receiving signal does not match the speed you set on the MFJ-1278, you can change speed by using the MODE command.

RTTY and ASCII Transmitting

While the MFJ-1278 is in RTTY or the ASCII mode and it is in command mode, you can initiate RTTY or ASCII transmission by typing:

K <CR> , then type:

CONTROL-T

The MFJ-1278 is now ready to transmit. Type your message on the keyboard. The MFJ-1278 will transmit your message as it is received from your computer.

Messages stored in memory buffers 0 thru 9 can be transmitted when in RTTY or ASCII mode. To transmit from buffer, when already in transmit mode, type:

Ctrl-T then, type a number from 0 thru 9.

The MFJ-1278 will transmit the message stored in the buffer selected.

Note: If the MFJ-1278 is not in transmit mode (i.e. in receive mode), then in order to initiate transmission from a buffer, you must type CONTROL-T twice then enter a number for the buffer. You can tell if the MFJ-1278 is in transmit mode, by observing the PTT LED on the front panel. If PTT LED is lit, MFJ-1278 is in transmit mode.

Once transmission is completed, press CONTROL-R to return MFJ-1278 to receiving mode. Note that the PTT LED is extinguished and STA LED is lit when MFJ-1278 is in receiving mode.

For some terminal programs, the CONTROL-T and CONTROL-R keys may not be used as the transmit and receive switch characters for the MFJ-1278. If the CONTROL-T and CONTROL-R do not function in RTTY or ASCII mode, you will need to re-assign the ASENDCHAR and the ARCVCHAR commands of the MFJ-1278 to other keys. See Chapter 6 of this manual for detail on the ASENDCHAR and ARCVCHAR commands.

Note: When operating RTTY or ASCII it is recommended that you operate at about 50% of full power. This is to prevent damage to the finals of your radio. Some modern radios allow operation of RTTY and ASCII at full power. You should consult the owner's manual of your radio to see what is the acceptable power level at which your radio should operate.

OPERATION: AMTOR

AMTOR (AMateur Teletype Over Radio), an error correcting protocol suite, is fully supported by the MFJ-1278. Two modes are available with AMTOR. These are mode A and mode B.

From command mode, AMTOR mode is entered by typing:

MODE AM <CR>,

Note that the MFJ-1278 displays an "a_cmd:" once the AMTOR mode has been entered. This "a_cmd:" command prompt lets you know that you are in AMTOR mode and only AMTOR commands are recognized by the MFJ-1278. To issue other non AMTOR commands you will have to return to the normal command mode ("cmd:" command prompt) by typing "CTRL-C".

Operation of the Tuning Indicator in the AMTOR mode is the same as all other modes. Simply tune the signal so that the center LED segment of the Tuning Indicator is lit with each burst of AMTOR signal received.

Mode A "ARQ"

Automatic request for re-transmission mode, known as "Mode A", is similar to packet radio in a number of ways.

The calling station must know exactly the ID of the called station in order for communications to occur.

The "ARQ" command causes a link attempt. This is similar to a packet CONNECT command.

This is a one-on-one protocol meaning that it is used for QSOs and is not appropriate for broadcast (see FEC and SELCALL for more on broadcasts).

ARQ Mode A introduces a few new terms. "Information Sending Station" (ISS) and "Information Receiving Station" (IRS). In ARQ, a station must be either the ISS or the IRS, and the station that is transmitting data is called the ISS.

One becomes an ISS either by issuing a successful AMTOR call (with the ARQ), or when the ISS relinquishes control of the link (through +?), or finally, if an IRS link CHANGE (see CHANGE) is requested.

Mode A "ARQ": Setup

First you should decide upon a selective call identifier and enter it as your MYSELCALL. A selective call is formed by taking the suffix of your callsign and adding to the front of it, the first letter of your callsign. If there are less than four characters, then add the first letter TWICE to the front of the call ID string.

Examples are:

N2WX is NNWX
WB2SPE is WSPE

AMTOR depends on everyone having a unique selective call. If you find there is already a station using the same call that you would use then you may need to base your ID upon the call district that you're in. Select a letter based upon the table below:

1=Q 2=W 3=E 4=R 5=T 6=Y 7=U 8=I 9=O 0=P

Example:

N2WX becomes NWWX (using zone 2)

When MYSELCALL is set the MFJ-1278 is ready to receive and respond to AMTOR calls.

Mode A "ARQ": Operating

To start the ARQ call, type "ARQ <selcall>" and a carriage return. The <selcall> must be four characters long. The MFJ-1278 CON and STA leds will light and your transmitter will start keying on and off repetitively. If the other station responds, you can start sending data (see below) or you can abort the call by typing QRT or R.

When CON or STA extinguishes, a link is established. You may now type CONVERSE or K to enter the data mode and start transmitting data. CON and STA will be lighting and extinguishing at various times depending on how much data you transmit and how good the link is.

When you are through transmitting, always use the AMTOR ending signal "+?". NEVER use a "K" (like 'over to you KK') since this will not relinquish the ISS function and the station you're working will be unable to transmit until the information sender sends a "+?".

If you wish to end the contact, go back to AMTOR command mode with a CTRL-C and type "QRT".

While you are the current receiving station, you can't send any new data to the other station. Should you wish to break in for some reason before the other station sends "+?", and you want to become the transmitter, go to AMTOR command mode with CTRL-C and type CHANGE. This forces the remote ISS to revert to the IRS. Then you can start transmitting data.

If you encounter a loss of sync (rephasing) problem during "ARQ" mode, it could be caused by the CPU oscillator of the MFJ-1278 not being set properly. The CPU oscillator is factory set at 4.91520 MHz. If adjustment is necessary, remove the cover of the MFJ-1278 and adjust C47 on the mother board for proper CPU oscillator frequency. A frequency counter or oscilloscope is needed to make this adjustment.

Mode A "ARQ": Monitoring

The **LISTEN** command is useful for monitoring other people's ARQ contacts. To use, tune in a mode A signal and type LISTEN. Both CON and STA will light until the station is synchronized, at which time the MFJ-1278 will start to receive.

Since ARQ monitoring is not error protected you may see occasional errors or garbage characters. This depends on how well or poorly you hear both sides of the QSO. The LISTEN mode is most useful for allowing amateurs to continue to self police their bands.

Mode B "FEC":

Mode B FEC is a "One transmitter, many receivers" mode. Unlike packet or ARQ, FEC does not have a one-on-one link setup, nor does it have a re-transmission feature.

Mode B "FEC": Setup

Setup for mode B FEC is the same as ARQ, although a selective call is not required

Mode B "FEC": Operating

To receive mode B FEC, tune in the FEC signal. When the MFJ-1278 detects the synchronization pattern either the CON or the STA LED will light (which depends on the exact point

in the transmission that you tune to) and received data will begin to appear on the terminal.

Use mode B FEC for calling (or finding other's) CQs, operating in round tables, and for transmitting bulletins to more than one station at a time. To transmit MODE B FEC type FEC and a carriage return. Your transmitter will key up. Now type CONVERSE or K to enter the data mode and you're on the air with FEC. Anything you type now will be broadcast.

When you're done transmitting, return to AMTOR command mode with CTRL-C and type R or QRT and a carriage return to release the transmitter. At this point again the MFJ-1278 will automatically attempt to synchronize to any mode B signal it hears.

Mode S "SELCALL":

Mode S is exactly like Mode B, EXCEPT that the broadcasting station can select one or a group of stations to receive the transmission. By turning the AMTOR SRXALL command OFF to enable the ID matching, you specify that you'll only print messages from mode S broadcasts addressed to your MYSELCAL address.

AMTOR Status LED Indicators

The CON and STA LEDs have special meanings in AMTOR modes.

STA=OFF CON=OFF

This is the standby mode. The MFJ-1278 is ready to respond to mode A "ARQ" calls, print mode B "FEC", and (according to SRXALL and MYSELCAL) print mode S "SELCAL" broadcasts.

STA=OFF CON=ON

This is the idle mode. If in a receive mode, the MFJ-1278 is receiving an AMTOR "idle" signal. The other station is still being received ok, though he is not transmitting any text.

In mode A this signal could also mean that a send-receive CHANGE is pending or that the sender is repeating a block.

STA=ON CON=OFF

This is the traffic mode. The MFJ-1278 is currently sending or receiving text.

STA=ON CON=ON

This is the phasing error mode. If in a mode A contact, this means that the MFJ-1278 is either trying to re-establish a link or is sending indication of a receive error.

If the MFJ-1278 is in mode L "LISTEN" then STA=ON CON=ON means the hunt for a synchronization to the signal is active.

OPERATION: NAVTEX

Navtex Operation

Navtex is part of the Mode B (FEC) AMTOR mode. Each Navtex transmission is prefaced by the characters ZCZC followed by a four character code of two letters that identify the station and type of message followed by a number code from 00 to 99 that identifies the particular message. This prevents your MFJ-1278 from receiving messages that have already been received. In addition, you can use the MFJ-1278 commands NAVMSG and NAVSTN to prevent your MFJ-1278 from receiving certain types of Navtex messages and/or certain Navtex stations you don't want to receive.

The first two characters consist of two letters (from A to Z). The first letters identify the station within a particular area. (Each receiving area is limited to 26 stations). The second letter identifies the type of message. Refer to the following explanation of the NAVMSG command for the different types of messages that are identified by this second letter.

The NAVMSG and NAVSTN commands allow you to choose both the types of messages you receive and the stations you receive. The other command that applies is the NAVTEX command.

To enter NAVTEX mode, you must first enter AMTOR mode by typing:

MODE AM <CR>

then type:

NAVTEX ON <CR>

MFJ-1278 will display "n_cmd:" Navtex command prompt indicating that it is ready to monitor any Navtex messages. Tune your radio to 518 KHz.

To receive NAVTEX, MFJ-1278 must first receive the ZCZC start message, followed by the four character preamble described above. If this is not received intact, the message will not be received. At the end of the message, NNNN will be received and the MFJ-1278 will stop receiving the Navtex message.

MFJ-1278 will remember the last 200 four character preambles received with less than 1/8 of its characters received in error. MFJ-1278 will not reprint any of these messages when they are re-transmitted from that Navtex station. If you exit the "a_cmd:" command prompt, the preamble memory is erased.

Emergency messages are numbered 00 and will always be

printed regardless of whether they have already been received.

To prevent your MFJ-1278 from receiving certain Navtex stations, just type "NAVSTN XXXXXXXXXXXXX" where each X is the identifying letter of the station you want to receive. Your list of stations to receive may contain up to 26 letters, each representing a station.

For example, if you want to receive only stations A, C and P, then you type "NAVSTN ACP". Only signals from these three stations will be received by your MFJ-1278.

If you want to prevent certain stations from being received, leave them off the list. Then, those stations will not be received while others within the receiving area will.

You may also type "NAVSTN ALL" (the Default value) to receive all Navtex stations.

NAVMSG works like the NAVSTN command with the ALL parameter used to exclude all, or to specify the type of messages to receive.

The types of Navtex messages currently are:

- A: Navigational warnings
- B: Storm Warnings
- C: Reports of Ice
- D: Search/Rescue Information
- E: Weather forecasts
- F: Pilot Service Messages
- G: DECCA System
- H: LORAN-C
- I: Omega Systems
- J: SATNAV Systems

K thru-Z are not in use at this time. They are reserved for

OPERATION: FAX

The MFJ-1278 provides an independent modem to transmit and receive FAX with multi-level of grays. FAX modes supported by the MFJ-1278 are listed in Table 4-6. These include Weather FAX (FAXMODE 3) and wire photographs (FAXMODE 1). However, the built-in printer port of the MFJ-1278 will support 2 levels FAX. In order to support more than 2 levels in FAX, you must have the specific terminal program for your computer to support multi-gray levels.

FAX operation of the MFJ-1278 does not require any special computer or software to receive FAX pictures on your Epson graphics compatible printer. However, to print a FAX picture to your computer screen or to save FAX pictures to disk, you need software that allows these operations. MFJ Enterprises, Inc. offers terminal software for some computers to support this operation. This software allows you to print FAX pictures to screen or

FAX Formats

The MFJ-1278 lets you receive and transmit FAX. The modulator and demodulator of the MFJ-1278 are pre-set to allow FAX operation without any recalibration. The MFJ-1278 will support FAX formats listed in Table 4-6.

Table 4-6: MFJ-1278 FAX Formats

FAXMODE (n)	Lines per Minute	Lines per Second	Type of Service
1	60 line/min.	1 line/sec.	Wire Photographs
2	90 line/min.	1.5 line/sec.	
3	120 line/min.	2 line/sec.	Weather FAX
4	240 line/min.	4 line/sec.	Satellite Weather FAX
5	360 line/min.	6 line/sec.	
6	480 line/min.	8 line/sec.	
7	180 line/min.	3 line/sec.	

You may change the format with the FAXMODE command. From command mode, type:

FAXMODE n <CR>

Where n is a number from 1 thru 7 as listed in the Table 4-6.

For example, if you want to change to FAX format 1 (60 lines per minute), type:

FAXMODE 1 <CR>

The MFJ-1278 will be set to receive or transmit FAX format 1.

FAX Frequency

FAX transmitting stations are usually found on the HF bands. Weather FAX stations are generally upper sideband. Some of these stations maintain a regular schedule. Table 4-7 lists the frequencies of some FAX stations.

Table 4-7: FAX STATION FREQUENCIES

FAX Operation Installation

Radio interface for FAX operation is the same as for other modes of operation. Radio connection of the MFJ-1278 to your radio is described in Chapter 3 of the MFJ-1278 manual.

Printer Connection

If you have a terminal program which supports FAX printing to the computer screen, then you should attach your printer to your computer printer port and not to the MFJ-1278. In this case turn the PRINTGRA command OFF. If you intend to receive the FAX picture and send it to the printer that is attached to the MFJ-1278 parallel port then turn the PRINTGRA command ON.

To insure successful FAX pictures printed to your printer, you must make sure that your printer is properly set. Make sure that your printer is set to "EPSON", "IBM" or compatible graphics mode. This is usually selected by DIP switches on the printer. Select "EPSON" graphics mode first. If "EPSON" graphics mode does not work, then you should set your printer to "IBM" graphics mode and try again.

Receiving FAX

From command mode, the MFJ-1278 can be set to FAX mode by typing:

MODE FX <CR>

Select the desired FAX mode by typing:

FAXMODE n <CR>

n is the FAX format as indicated by FAX Format Table 4-6. For HF weather FAX, select FAXMODE 3. The default FAX mode for MFJ-1278 is FAXMODE 3 (120 lines per minute format). This is the format used by most weather FAX stations. For other FAX format use other n value as listed in Table 4-6.

Set the PRINTGRA command to ON if you are printing the FAX picture to the printer attached to the MFJ-1278 parallel printer port. Set the PRINTGRA command to OFF if you are printing the FAX picture to the computer screen. Note that to print FAX picture to the computer screen requires a terminal program which will perform this function.

Set the audio output of your radio to normal volume. Tune your radio to a desired frequency. If you are not familiar with recognizing FAX signals, you may want to select one of the weather FAX frequencies listed above. Weather FAX is usually transmitted at 120 lines per minute. This is a horizontal scanning rate of 2 lines per second. So by listening to the scanning rate, you can determine what format you should set the MFJ-1278 on to receive the signal.

After tuning in the desired FAX frequency, set the THRESHOLD control to maximum clockwise rotation. Tune the radio so that the DCD LED remains lit. Now observe the TUNING INDICATOR of the MFJ-1278 while fine tuning your radio. You will notice that with each scan the tuning indicator will move toward the center. Tune the radio so that the tuning indicator is centered at the end of each FAX scan. Once you achieve this, the FAX signal is tuned in and the MFJ-1278 is ready to decode the FAX signal.

FAX Printing to Printer

This section applies if you have your "EPSON" or "IBM" graphics compatible printer attached to the parallel port of the MFJ-1278.

Most commands that affect FAX printing default to a value which will allow successful printing. However, before printing, make sure the commands EPSON and PRINTGRA are ON. Printing a FAX image directly to a printer will not function unless EPSON and PRINTGRA are ON.

After selecting the desired FAX mode, type K to leave command mode and enter the CONVERSE mode. Once in CONVERSE mode the MFJ-1278 is in standby-receive mode. This means that the MFJ-1278 is listening to the radio for the distinctive "tic-tic" that indicates the synchronization period at the beginning of a picture. If the MFJ-1278 hears the "tic-tic" well enough, it will establish a lock onto the signal and start printing to the printer. The printer will print upon each scan of the FAX picture.

The MFJ-1278's built-in LOCK detects the beginning of each picture before starting to print. This insures each picture will be printed from top to bottom. If you want the printer to start to print in the middle of the picture, you may force a lock on the picture and the printer will begin to print upon the "force lock". To force a lock, you simply type the letter "L" while in the FAX standby-receive mode.

The LOCK detect feature on the MFJ-1278 is effective for FAXMODE 3. For other FAXMODEs, you will want to force a LOCK at the beginning of the picture to insure proper printing.

If the FAX picture appears to be printed shifted to the right, you can type the "<" key to shift the picture to the left. Each repetition of the "<" key will shift the picture 1/10" to the left. To shift the picture to the right, use the ">" key. Each repetition of the ">" key will shift the picture to the right 1/10". For example, if you needed to shift the picture to the left 1 inch, you would press the "<" key ten times. The picture can be shifted to the right or left at any time during printing.

If your picture is elongated horizontally or vertically, you can correct this by setting the ASPECT ratio. ASPECT is used to establish a reasonable aspect ratio between horizontal and vertical presentation of FAX graphics. ASPECT ratio can be set between 2 thru 8, with 2 being the optimum aspect ratio for weather FAX. The default ASPECT ratio of the MFJ-1278 is 2. The ASPECT ratio can be set by using the command ASPECT followed by a number from 2 thru 8. If you find that your picture seems to be elongated horizontally, you should decrease the value of aspect. If the picture is elongated vertically, you should increase the aspect value.

If you notice spaces in the printed picture, you should set GRAPHLF to OFF. The GRAPHLF command determines whether the MFJ-1278 will issue a line feed before the carriage return on every line of graphics. GRAPHLF defaults to OFF. For most printers GRAPHLF should be set to ON.

If the printed picture appears to be slanted to the left or to the right, this indicates that the master CPU clock on the MFJ-1278 may not be in frequency with the transmitting signal. To correct this problem, you will need to remove the cover of the MFJ-1278 and adjust the white capacitor trimmer, C47. This adjustment does not require any special equipment. Simply adjust C47 1/8 rotation at a time and let the printer print a few lines of the FAX picture. If the picture seems to be getting worse, rotate the trimmer in the opposite direction. Repeat this procedure until the picture is straight vertically.

Display FAX Picture on Computer Screen & Save it to Disk

The MFJ-1278 firmware does not support printing to your computer screen or allow you to save FAX pictures in disk files. You need special software for your particular computer that provides these features.

For IBM PC/XT/AT or compatibles, Macintosh and Commodore C64/128 users, MFJ offers an optional Starter Pack which will allow you to receive SSTV/FAX in near real time to the screen. SSTV/FAX pictures can also be saved on disk with software supplied with the Starter Pack. Pictures saved on disk may be re-transmitted, recalled to print to the screen or sent to the printer at any time. Order MFJ-1284 for IBM PC/XT/AT or compatibles, MFJ-1287 for Macintosh computer and MFJ-1282 for Commodore C64/C128.

If you are using one of the above terminal program you should first turn PRINTGRA OFF. Follow the instructions given in the software documentation to receive FAX pictures on the screen or to save the pictures to disk files.

For those who wish to write special software to handle FAX graphics and display it on screen, the following information may be useful for you.

When the PRINTGRA command of the MFJ-1278 is ON, FAX pictures received will be sent to the graphics printer attached to the MFJ-1278 printer port. If PRINTGRA is OFF, the MFJ-1278 will direct the picture graphics to your terminal thru the RS-232C port of the MFJ-1278. This FAX format thru the RS-232 port will be in either 2 levels (MULTIFAX OFF) or multi-level raw data format (MULTIFAX ON). The default is the 2 levels data format. To save to disk or display on your computer screen, the terminal program you used must be compatible with the multi-level raw data format or it must be compatible with the 2 levels "FAX frame" format:

Two Levels FAX Pictures Format

The FAX frame sent to the user's terminal contains carriage control information, graphics setup information and "nnn" columns of 6-row high dot graphics.

LF, CR, ESC x x, ESC x x x, <<nnn character of graphics>>

Special note: in order to allow the FAX frames to pass through without special handling, each character in the frame is biased upward with the value \$30 (Hex), so only characters of ASCII value \$30 through \$7F are sent to the terminal.

A few side effects of the special handling:

1. FAX frames and pictures may be transmitted in PACKET or ASCII or logged to disk without concern for binary

transfers.

2. The "x" values in the FAX header are not useful for determining the format of the FAX picture (since 2 bits of

beginning of the picture. Raw-data stream will continue to be sent thru the RS-232 port until the end of picture pattern is detected or a "CTRL-C" is received. Therefore for multi-level FAX the terminal program is responsible for attaining synchronization to begin a picture and to detect the end-of-picture to stop printing.

Raw multi-level data are packed three pixels-per-byte and biased with +30H (similar to the 2 level format in this respect). The leftmost 2-bit pixel, in bits 5 and 4 ("a") in the below example, come first in time with respect to "b" and "c" pixels.

Each pixel reflects the sampling of the received audio at a 366.66 μ S interval. Every data byte of three pixels represents a 2.5 mS "snapshot" of the receiver.

There are three exceptions. If the actual data byte (before unbiasing) is "p", "q", or "r", then the 1200 Hz SYNC tone is being received. "p" means it was received in the first time position, "q" the second, and "r" the third.

Example: Data byte decoded

bit #	7	6	5	4	3	2	1	0
data	x	x	a	a	b	b	c	c

x = don't care
a,b,c = first, second, and third pixel groups.

Terminating FAX Printing

Printing of a FAX picture can be terminated at any time during the printing. You must type a "ESC", CTRL-C in order to terminate FAX printing. The MFJ-1278 will return to command mode, and printing will stop.

Transmitting FAX

The MFJ-1278 is capable of transmitting 2 levels or multi-gray levels pictures in the FAX mode.

Two Levels FAX Transmitting

In 2 levels FAX, pictures to be transmitted by the MFJ-1278 in FAX mode must be stored on disk and must be of the format required by the MFJ-1278. How a file is recalled and transmitted will depend on the terminal program used. Refer to the instruction manual of your terminal program.

Enter the FAX mode by using the MODE command. Type:

MODE FX <CR>

The MFJ-1278 defaults to FAXMODE 3 (120 lines per minute or 2 lines per second). Set MULTIFAX to OFF (default).

The FAX format can be changed by using the FAXMODE command. The MFJ-1278 supports receive or transmit of all FAX formats listed in Table 4-6 in both transmit and receive.

In 2 levels FAX, pictures saved under one format may NOT be transmitted under a different format. For instance, you can NOT receive and save a FAX picture under FAX format 3, then re-transmit it under FAX format 2 or another FAX format as listed in Table 4-6.

After entering the FAX mode and selecting the desired FAX format to transmit, enter the CONVERSE mode by typing:

K

then, type:

CTRL-T.

The MFJ-1278 is now ready to transmit a picture and respond with: "Send PIX Now". In FAX transmit mode MFJ-1278 will not key the transmitter until it has been given around 1,500 characters of FAX graphics. User should follow the normal "File Upload" procedure given by the terminal program.

In 2 levels FAX, when the MFJ-1278 keys the transmitter it sends $(5 * (ASPECT+1))$ rows of synchronization pulses before starting to transmit the picture.

The MFJ-1278 determines that it is finished transmitting by looking at its input buffer: If the buffer is empty, the transmission is assumed complete, and the MFJ-1278 then sends an IDLE signal for approximately 15 to 18 seconds. This signals the end of the transmission.

NOTE: If your computer does not transmit the data to the MFJ-1278 rapidly enough, partial picture transmission will result. Also if your computer does not support flow control, incorrect operation may result.

Multi-level FAX Transmitting

The MFJ-1278 is capable of transmitting multi-gray levels pictures. To achieve this you must use a terminal program

which supports the multi-level data format required by the MFJ-1278. Each level of gray is represented by a tone produced by the MFJ-1278 modem. The 16 tones which can be produced by the MFJ-1278 FAX/SSTV modem (in Hz) are:

1500, 1550, 1600, 1650, 1700, 1750, 1800, 1850, 1900, 1950, 2000, 2050, 2100, 2150, 2200, and 2250.

The tone being transmitted determines the shade of gray in the picture. The higher the tone the lighter the gray. 1500 Hz is for the sync, 1550 Hz is black and 2250 Hz is white. The other tones determine the shades between the black and the white areas.

The command PIXTONES is used to set the multi-gray levels FAX and SSTV pictures being transmitted. The current PIXTONES is set to 8 gray levels. PIXTONES defines the gray levels of the SSTV & FAX transmitted by the MFJ-1278. To achieve this you must use a terminal program which supports the multi-gray levels SSTV & FAX transmitting.

PIXTONES is defined as follows:

PIXTONES aaa,bbb,ccc,ddd,eee,fff,ggg,hhh

where,

aaa is the value which determines the "white" area of the transmitted picture.

hhh is the value which determines the "black" area of the transmitted picture.

The values between aaa and hhh defines the gray areas of the transmitted pictures.

The default PIXTONES values are:

PIXTONES \$B9,\$3A,\$38,\$98,\$88,\$B0,\$90,\$A0

Note that if 4 gray-levels of SSTV or FAX transmission, MFJ-1278 will automatically select only four of the PIXTONES values you have chosen. PIXTONES does not affect 2 levels FAX transmitting.

If the picture transmitted does not seem to have the right contrast, try and reset the PIXTONES values. The HEX values which represent the PIXTONES for the pictures to be transmitted is listed in Table 4-3 below.

In SSTV and MULTIFAX mode, MFJ-1278 automatically transmit the syne tone. Therefore, sync tone does not need to be selected for PIXTONES parameters.

Table 4-8: FAX/SSTV Multi-Gray PIXTONES

PIXTONES Values (HEX)	FAX/SSTV Transmit Tones (Hz)
-----------------------	------------------------------

(not selectable)	1500 (sync)
\$00	1550
\$A0	1600
\$90	1650
\$B0	1700
\$88	1750
\$A8	1800
\$98	1850
\$B8	1900
\$BC	1950
\$BA	2000
\$BE	2050
\$B9	2100
\$BD	2150
\$BB	2200
\$BF	2250

Creating FAX Pictures for Transmitting

FAX pictures captured by the MFJ-1278 and saved on disk can be re-transmitted. However, it must be transmitted with the same format with which it was saved.

MFJ Starter Packs for the IBM PC/XT/AT or compatible computers can be used in conjunction with other graphics generating programs available to create your own drawings and graphics.

MFJ-1292 "Picture Perfect" Video Digitizer for the IBM and compatible computers allows you to digitized a picture with a Camcorder or video camera. The digitized picture is stored to disk and can be transmitted by the MFJ-1278 in any of the FAX formats.

Contact us or your MFJ dealer for more information concerning the MFJ-1292 Video Digitizer and other graphics generating programs for use with the MFJ-1278.

OPERATION: SLOW SCAN TELEVISION (SSTV)

The MFJ-1278 lets you receive black and white SSTV pictures with the built-in printer port in 4 levels of gray.

SSTV Formats

MFJ-1278 provides a dedicated modem for SSTV operation. The modulator and demodulator frequencies of the MFJ-1278 are pre-set to allow SSTV operation without any recalibration. The MFJ-1278 supports all SSTV formats listed in Table 4-9.

Table 4-9: MFJ-1278 SSTV Formats

TVMODE(n)	Formats
1	8.5 seconds
2	12 seconds
3	17 seconds
4	24 seconds
5	36 seconds

The SSTV format can be changed by using the TVMODE (n) command. n is a number from 1 thru 5 as listed in the Table 4-9. For example, to set MFJ-1278 to 12 seconds SSTV format, you would type:

TVMODE 2 <CR>

The MFJ-1278 would be set to receive or transmit SSTV in the 12 seconds format.

SSTV Installation

Installation of MFJ-1278 for SSTV operation is the same as the other modes of operation. Installation of MFJ-1278 to your radio is described in Chapter 3 of this manual. Either Radio port can be used to connect to your radio for SSTV operation.

Printer Connection

If you have a terminal program which supports SSTV picture printing to the computer screen, then you should attach your printer to your computer printer port and not to the MFJ-1278. In this case turn the PRINTGRA command OFF. IF you intend to receive the SSTV picture and send it to the

printer that is attached to the MFJ-1278 parallel port, then you should turn PRINTGRA command ON.

To insure successful SSTV picture printing to your printer, you must make sure that your printer is properly set. Make sure that your printer is set to "EPSON" , "IBM" or compatible graphics mode. This is usually selected by DIP switches on the printer. Select "EPSON" graphics mode first. If "EPSON" graphics mode does not work, then you should set your printer to "IBM" graphics mode and try again.

Receiving SSTV Pictures

From command mode, the MFJ-1278 can be set to SSTV mode by typing:

MODE TV <CR>

Select the desired SSTV formats by using the TVMODE command. Type:

TVMODE n <CR>

n is the TV format 1 thru 5 as listed in SSTV Format Table 4-9. For example for 8.5 Second TV format, you will type: TVMODE 1.

The default SSTV mode for MFJ-1278 is TVMODE 1 (8.5 seconds format).

After tuning to the desired SSTV frequency, observe the TUNING INDICATOR of the MFJ-1278 while fine tuning the radio. You will notice that with each scan the tuning indicator will move toward the center. Tune the radio so that the 10th LED segment from left is lit at the end of each SSTV line scan. Once you achieve this, the SSTV signal is tuned in. The DCD LED should light. If DCD LED on the MFJ-1278 is not lit, rotate the THRESHOLD control until it is lit.

SSTV Printing to Printer

At this point you will want to ensure that your printer is properly set. Make sure that your printer is set to "EPSON GRAPHICS" or IBM graphic mode. This is usually selected by DIP switches on the printer. "IBM GRAPHICS" mode is not the same as "EPSON GRAPHIC" mode. If you are using an EPSON graphics printer, you should turn the IBM GRAPHICS mode off and set your printer to EPSON GRAPHICS mode.

Although most commands of the MFJ-1278 that affect SSTV printing are defaulted to allow successful printing, you should check these commands before printing any SSTV picture. You should insure that the commands **EPSON** and **PRINTGRA** are ON. The default values of these commands are ON. SSTV printing to the printer will not function unless these commands are turned on.

Note that **PRINTGRA** should be turned ON only if you are printing pictures through the MFJ-1278 printer port. If you are sending pictures to the computer screen with terminal program which is capable of performing this function, then **PRINTGRA** must be turned OFF.

After entering the SSTV mode and you have properly selected the correct TV format, type:

K

to leave command mode and enter the CONVERSE mode. Once in CONVERSE mode the MFJ-1278 is in standby-receive mode. This means that the MFJ-1278 is listening to the radio for the synchronization signal at the beginning of each SSTV picture. If the MFJ-1278 hears the synchronization signal well enough, it will establish a lock onto the signal. Once the signal is locked in MFJ-1278 will display a "!" . A "!" indicates that a lock on the signal is established and MFJ-1278 begins to decode the signal. Once decoding is completed, the printer attached to the MFJ-1278 will begin to print the captured SSTV picture.

The MFJ-1278 detects the beginning of each picture before starting to print. This insures each picture will be printed from top to bottom. If you want the printer to start to print in the middle of the picture, you may force printing to begin at any time by typing the letter "L" while in the SSTV standby-receive mode.

If you notice spaces in the printed picture, you should set **GRAPHLF** to OFF. The **GRAPHLF** command determines whether the MFJ-1278 will issue a line feed before the carriage return on each line of graphics. The default for **GRAPHLF** is OFF. For most printers **GRAPHLF** should be turned ON.

If the picture printed appears to be distorted in large black areas, you should make sure that the command **TVHSYNC** is set to OFF. The default for **TVHSYNC** is OFF. For most SSTV receiving **TVHSYNC** should be turned OFF.

The 4 levels SSTV picture received by the MFJ-1278 thru the built-in parallel printer port can be adjusted for brightness and contrast by using the **TVBREAK** command.

TVBREAK controls the brightness and contrast of the SSTV received on the MFJ-1278 printer port as well as when SSTV picture is printed to the screen. SSTV pictures sent to the MFJ-1278 printer port is set at 4 gray-levels. With terminal software which supports multi-gray levels SSTV you can

SSTV Printing to the Screen

There are three exceptions. If the actual data byte (before unbiasing) is "p", "q", or "r", then the 1200 Hz SYNC tone is being received. "p" means it was received in the first time position, "q" the second, and "r" the third.

Example: Date byte decoded

bit #	7	6	5	4	3	2	1	0
data	x	x	a	a	b	b	c	c
	x = don't care							
	a,b,c		=	first,	second,	and third pixel groups.		

Saving SSTV Pictures

When the PRINTGRA command of the MFJ-1278 is ON, SSTV pictures received will be sent to the graphics printer attached to the printer port. If PRINTGRA is OFF, the MFJ-1278 will direct the picture graphics (in raw data format) to the user's terminal thru the RS-232C port of the MFJ-1278. If your terminal program allows you to save a file to disk, then you can save the picture on disk and re-transmit it later.

Terminating SSTV Printing

Printing of an SSTV picture can be terminated at any time during the printing. User will type "ESC" then CTRL-C. Printing will stop and the MFJ-1278 will return to command mode.

Transmitting SSTV Pictures

The MFJ-1278 is capable of transmitting multi-gray levels SSTV pictures. To achieve this you must use a terminal program which support the multi-level SSTV data format required by the MFJ-1278.

Each level of gray is represented by a tone produced by the MFJ-1278 modem. The 16 tones which can be produced by the MFJ-1278 FAX/SSTV modem (in Hz) are:

1500, 1550, 1600, 1650, 1700, 1750, 1800, 1850, 1900, 1950, 2000, 2050, 2100, 2150, 2200, and 2250.

The tone being transmitted determines the shade of gray in the picture. The higher the tone the lighter the gray. 1500 Hz is for the sync, 1550 Hz is black and 2250 Hz is

SSTV & FAX transmitting.

PIXTONES is defined as follows:

PIXTONES aaa,bbb,ccc,ddd,eee,fff,ggg,hhh

where,

aaa is the value which determines the "white" area of the transmitted picture.

hhh is the value which determines the "black" area of the transmitted picture.

The values between aaa and hhh defines the gray areas of the transmitted pictures.

The default PIXTONES values are:

PIXTONES \$B9,\$BA,\$B8,\$98,\$88,\$B0,\$90,\$A0

Note that if 4 gray-levels of SSTV or FAX transmission, MFJ-1278 will automatically select only four of the PIXTONES values you have chosen.

If the picture transmitted does not seem to have the right contrast, try and rset the PIXTONES values. the HEX values which represent the PIXTONES for the pictures to be transmitted is listed in Table 4-8 in the "Multi-level FAX Transmitting" section in this chapter.

Note that sync tone of 1500 Hz is automatically transmitted when MFJ-1278 enters SSTV transmitting. Sync tone can not be changed.

SSTV pictures received by the MFJ-1278 and stored on disk can be retransmitted under the same SSTV format. How a file is stored and retransmitted will depend on the terminal

Note that under multi-level SSTV, selection of TVMODE for transmitting is not required.

After entering the SSTV mode, enter the CONVERSE mode by typing:

K.

Then, switch to transmit mode by typing:

CTRL-T.

Terminal program will send raw data stream to the MFJ-1278 thru the RS-232 port. Transmit to receive switching is automatic and occurs when the data stream has been exhausted. Note that TVMODE setting is NOT required for multi-level transmitting. Follow the normal "File Upload" procedure given by the terminal program.

CAUTION: If your terminal program is not fast enough to support 480 cps sustained then you will be unable to transmit multi-level SSTV or multi-level FAX transmitting.

Creating SSTV Pictures for Transmitting

SSTV pictures captured by the MFJ-1278 and saved on disk can be re-transmitted. However, it must be transmitted with the same format with which it was saved.

In order to enjoy the exciting world of SSTV, you must have ways to create your own graphics. MFJ Starter Packs for the IBM PC/XT/AT or compatible computers can be used in conjunction with other graphics generating programs available to create your own drawings and graphics.

MFJ-1292 "Picture Perfect" Video Digitizer for the IBM and compatible computers allows you to digitize a picture with a Camcorder or video camera. The digitized picture is stored to disk and can be transmitted by the MFJ-1278 in any of the SSTV formats.

Contact us or your MFJ dealer for more information concerning the MFJ-1292 Video Digitizer and other graphics generating programs for use with the MFJ-1278.

ADVANCED PACKET OPERATION

This chapter describes some aspects of packet operation that you don't need to be concerned with for everyday conversational operation. You will want to consult this chapter if you are using your station for special applications such as a Packet Personal Mailbox, Bulletin Board, binary file transfers, Packet picture transfers or running a "host" program. This chapter also discusses use of the newly developed packet anti-collision feature. HF and OSCAR packet operation is also discussed in detail in this chapter.

We will use the term "computer" to refer to computers or terminals. In the command examples, the MFJ-1278's prompts and other messages are shown in ordinary type, your responses are shown in **bold face**, and received packets are shown underlined. Commands and other special keywords are shown in upper case; other text entered to the MFJ-1278 is shown in upper and lower case.

Special Characters

The MFJ-1278 recognizes a number of special characters for input editing, flow control, and other control functions. You can change any of these special characters to customize the MFJ-1278 to suit your applications, your computer, or your whim. Most of the characters are set by commands which specify the ASCII character code for the desired character. You can disable any special character feature by setting the character value to 0. Input editing characters may be disabled with no serious effects. You should use caution in disabling the flow-control or Command Mode entry characters. Also be careful not to set two special characters to the same value.

Special characters are normally set to various control characters. Control characters are entered by holding down a special control key while typing another key. For example, control-C, or <CTRL-C> is entered by holding down the control key while typing C. If your computer doesn't have a special control key, you will have to consult your computer's documentation to see how to enter these characters. If you will have difficulty entering control characters, you can change the special characters to, for example, seldom-used punctuation.

The action of each special character is described in detail under the entry in Chapter 6 for the command that sets that character.

You can enter the code for a character in either hex (base 16) or decimal notation. The MFJ-1278 displays character codes in hex. A number in hex notation is indicated by beginning the number with a \$. The "digits" of a hex number represent multiples of powers of 16. The values 10 through 15 are represented by the letters A through F, which may be upper or lower case. For example,

$$\text{\$1B} = 1 \times 16 + 11 = 27.$$

Tables of ASCII character codes are available in most computer manuals. A table of ASCII codes for control characters follows.

Table 5-1. ASCII Codes for Control Characters.

Dec	Hex	Control	Mnemonic	Dec	Hex	Control	Mnemonic
0	\$00	<CTRL-@>	NUL	16	\$10	<CTRL-P>	DLE
1	\$01	<CTRL-A>	SOH	17	\$11	<CTRL-Q>	DC1
2	\$02	<CTRL-B>	STX	18	\$12	<CTRL-R>	DC2
3	\$03	<CTRL-C>	ETX	19	\$13	<CTRL-S>	DC3
4	\$04	<CTRL-D>	EOT	20	\$14	<CTRL-T>	DC4
5	\$05	<CTRL-E>	ENQ	21	\$15	<CTRL-U>	NAK
6	\$06	<CTRL-F>	ACK	22	\$16	<CTRL-V>	SYN
7	\$07	<CTRL-G>	BEL	23	\$17	<CTRL-W>	ETB
8	\$08	<CTRL-H>	BS	24	\$18	<CTRL-X>	CAN
9	\$09	<CTRL-I>	HT	25	\$19	<CTRL-Y>	EM
10	\$0A	<CTRL-J>	LF	26	\$1A	<CTRL-Z>	SUB
11	\$0B	<CTRL-K>	VT	27	\$1B	<CTRL-[>	ESC
12	\$0C	<CTRL-L>	FF	28	\$1C	<CTRL-\>	FS

Command Mode

Command Mode is used to enter commands which alter the MFJ-1278's operating parameters. The other modes are entered from Command Mode. When the MFJ-1278 is in Command Mode, the Command Mode prompt,

cmd:

is printed at the beginning of each input line. Note, however, that if the MFJ-1278 has received and displayed packets, the prompt may have scrolled off the screen.

The MFJ-1278 will be in Command Mode after a reset or power-up. After a power-off, power-on sequence, all operating parameters of the MFJ-1278 are initialized to the

AUTOLF	Add <LF> after <CR> in data sent to terminal
BKONDEL	Echo after character deletion
ECHO	Automatic echo of serial port input
FLOW	Type-in flow control
LCOK	Lower case translation
NUCR	Nulls after <CR>
NULF	Nulls after <LF>
NULLS	Null count
SCREENLN	Automatic <CR> insertion

Entering Data-Transfer Modes

There are several ways to enter a data-transfer mode from Command Mode. You can type the command **CONVERS** or **K** to enter Converse Mode or the command **TRANS** or **T** to enter Transparent Mode, and the MFJ-1278 will immediately enter the specified mode. The MFJ-1278 will automatically enter a data-transfer mode if you are in Command Mode when a connection is completed. You can specify the data-transfer mode for automatic entry with the command **CONMODE**:

cmd:CONMODE TRANS

will specify Transparent Mode, and

will return to the default choice of Converse Mode.

The timing of the automatic entry into data-transfer mode depends on whether you or the other station initiated the connection. If you receive a connect request which your MFJ-1278 accepts, you will enter data-transfer mode when the MFJ-1278 sends the connect acknowledgment (ACK) packet.

Mode. In Converse Mode, the information you type is assembled by the MFJ-1278 into packets and transmitted over the radio. The send-packet character causes the input to be packetized for transmission. If you type a full packet-

CANLINE	cancel current line
CANPAC	cancel current packet
COMMAND	Command Mode entry
DELETE	character deletion
MFILTER	characters to be filtered in monitored packets
PASS	insert following special character
REDISPLA	re-display current line
SENDPAC	send current packet
START, STOP	user's flow control characters (sent to MFJ-1278)
XOFF, XON	MFJ-1278 flow control characters (sent to terminal)

The following commands enable display features which are active in Converse Mode. Refer to the discussions of these commands for details on the operation of these characters in Converse Mode.

8BITCONV	Retain high-order bit from serial port in converse mode
AUTOLF	Add <LF> after <CR>
BKONDEL	Echo after character deletion
ECHO	Automatic echo of serial input
ESCAPE	<ESCAPE> translation
FLOW	Type-in flow control
LCOK	Lower case translation
NUCR	Null characters after <CR>
NULF	Null characters after <LF>
NULLS	Null count
SCREENLN	Automatic <CR> insertion

Transparent Mode

Packet radio is very well suited to the transfer of data between computers. In some cases Converse Mode will work well for computer data transfer. However, files such as a processor text file, may contain characters which conflict with special characters in Converse Mode. Some of these files may utilize all eight bits of each byte rather than the seven bits required by ASCII codes. If you transfer such files you will have to use Transparent Mode.

Transparent Mode is a data-transfer mode like Converse Mode. In this mode there are no special characters -- everything you type (or everything your computer sends to the MFJ-1278) is sent over the radio exactly as it was received by the MFJ-1278. There are no input editing features and there is no send-packet character. Packets are sent at regular time intervals or when a full packet of information is ready. The time interval at which data is packetized is set by the PACTIME command.

The display characteristics of the MFJ-1278 are also modified in Transparent Mode. Data is sent to the computer exactly as it is received over the radio, including all 8 bits of each byte received. Features such as auto-linefeed insertion and screen wrap are disabled, and echoing of input characters is disabled. The parameters that control these features in Command Mode and Converse Mode are not changed

The MFJ-1278's input buffer may fill up in Command Mode if you try to type too long a command. In Converse Mode the

ting XFLOW ON. The special flow control characters are set to <CTRL-S> and <CTRL-Q> by default, but they may be changed. The commands XON and XOFF set the characters which will be sent to the terminal by the MFJ-1278, and the commands START and STOP set the characters to be sent to the MFJ-1278 by the terminal. Your computer may receive as many as 4 characters from the MFJ-1278 after sending a STOP character, since some characters may already be "in route" through serial I/O chips.

If you send a STOP (START) character to the MFJ-1278 when it is already stopped (started), the character will be ignored. If the STOP and START character are the same character, this character will "toggle" the output, turning it off if it is on, and on if it is off.

You can disable XON/XOFF flow control in one direction only by setting the appropriate flow control characters to 0. If you do this, the MFJ-1278 will automatically use CTS flow

input). The "hold" remains in effect until you type a <CR> to end the command line, or a send-packet character to mark the end of a packet, or until you erase or re-display the line you have started.

Some computers have difficulty simultaneously sending and receiving characters over the serial port. This is most commonly the case for computers with "software UARTs." Type-in flow control will improve the operation of such computers with the MFJ-1278.

Detail VHF Packet Operation

The previous chapter's discussion of "Basic Operation" contains enough information for most packet operation. This section describes a few other aspects of packet operation.

Station Identification

Your station identification (call sign) is set with the command MYCALL, as described in the previous chapter. If you will have more than one station on the air operating with the same call sign, they must be distinguished -- no two stations can have identical station identifications, or the packet protocol will fail. You can distinguish additional stations by setting the "secondary station ID", or SSID. This is a number from 0 to 15, appended to the call sign with a dash:

cmd:MYCALL W3IWI-3

If you don't specify the SSID extension, it will be 0, and the MFJ-1278 won't explicitly show SSIDs that are 0. If you want to connect to a station with a SSID other than 0, you

only send identification packets if it has been digipeating.

Automatic Operations

Normally, any packet station can be used by other stations for relaying, or digipeating, packets to a more remote destination. If you don't want your station digipeating packets, you can give the command DIGIPEAT OFF. Unless there are special circumstances, such as a station operating on emergency power, most packet operators set DIGIPEAT ON in the spirit of Amateur cooperation.

Your station will normally accept a connect request from another station if it isn't already connected. You can disable this capability by setting CONOK OFF. If you receive a connect request when CONOK is OFF, the MFJ-1278 will display the message

*** connect request: <callsign>

and send a "busy signal" rejection packet to the other station. If you receive a rejection packet from a station you try to connect to, your MFJ-1278 will display

*** <callsign> busy
*** DISCONNECTED

If you want to have a special message sent automatically to stations connecting to you, you can specify the message with the command CTEXT. This message can consist of any text string up to 120 characters, and you may include <CR>s by prefixing them with the pass character:

```
cmd:CTEXT Sorry, I can't talk right now.<CTRL-V><CR>
I'll be on the air again after 8 PM.<CTRL-V><CR>
Joe
```

In order for this message to be sent to stations connecting to you, you must set CONOK ON so that the connection takes place (default), and enables the automatic message with CMSG ON.

If you want to leave your station on but inhibit transmitting, you can set XMITOK OFF. If you do this, you would normally set CONOK OFF as well.

You can have your station periodically send an automatic message by enabling "beacons." A beacon can be used to make general-interest announcements, provide packets for other stations to use to test their ability to receive, or announce the presence of a bulletin-board operation. The beacon message is set with the command BTEXT, which works

the same way as the CTEXT command. You enable beacon transmission and set the frequency at which beacons are sent with the command BEACON. To transmit the beacon at 10-second intervals, for example, give the command

cmd:BEACON EVERY 1

The beacon function also has a transmit-after mode, enabled by using the keyword AFTER in place of EVERY, in which a beacon packet is only transmitted after activity is heard on the channel. This feature might be used to leave an announcement for other packet users. If someone transmits on an otherwise idle channel, a beacon can be sent a short time later. No beacons are sent in this mode if there is a lot of packet activity on the channel, since the required period of quiet will not occur.

Unattended Operations

Individuals who want to leave their MFJ-1278 on overnight can monitor packets even with the terminal or computer off. Just type CTRL-S then turn the terminal or computer off. The next morning turn the computer on, then type CTRL-Q. The MFJ-1278 will dump everything monitored during the night limited only by the amount of available RAM.

The MFJ-1278 can operate unattended for extended periods of time. If you would like to have the MFJ-1278 operate as a digipeater but not connect with a station, be sure to set

You can add a <LF> after each <CR> included in your packets by setting LFADD ON. If the other station reports that lines are overprinted on his display, and he can't remedy the situation at his end, you can enable this function.

Commands Affecting Protocol

This section describes some of the commands that affect the operation of the packet protocol. Details of the protocol are given in Chapter 9.

The MFJ-1278 implements AX.25 Level 2 protocol, a set of rules for formatting messages to other TNCs. The version of AX.25 Level 2 protocol used by the MFJ-1278 can be set to Version 2.0 with the command AX25L2V2 ON, or to Version 1.0 with the command AX25L2V2 OFF. Digipeating may not be successful if some MFJ-1278s are running Version 1.0 and some are running Version 2.0. In addition, the command CHECK controls a timing function that depends on the protocol version selected.

You can specify the "address" to be used for unconnected packets, as well as intermediate digipeaters with the UNPROTO command. The format is similar to that of the CONNECT command:

```
cmd:UNPROTO QST VIA NK6K
```

The default address for unconnected packets is CQ.

The following functions may be useful for tracking down protocol problems. They are seldom useful for ordinary packet operations. The error-checking function of the protocol is disabled for monitored packets with the command PASSALL. If you set PASSALL ON, any "packet" will be displayed if it meets the following conditions: It must start with a flag sequence; and it must contain an integral number of 8-bit bytes. The TRACE command enables the display of the address and control fields of packets, as well as the text. The trace function displays all bytes in hex as well as ASCII equivalents.

Packet Timing Functions

Transmit Timing

Amateur radio equipment varies greatly in the time delays required in switching from receive to transmit and from transmit to receive. If the MFJ-1278 starts sending data before the transmitter is operating or before the receiver has had time to switch from transmitting and lock up on the

incoming signal, the packet will not be received properly. The delay between transmitter keyup and the beginning of data transmission is controlled by the command TXDELAY. During the time the MFJ-1278 is keying the transmitter but not sending data, it will transmit a synchronizing signal.

Special Protocol Times

You can set up a connection time-out with the command **CHECK**, which specifies a time in multiples of 10-second intervals. This function prevents the MFJ-1278 from getting stuck in a connection when the other station disappears for longer than the specified time. The MFJ-1278 uses this time somewhat differently depending on the setting of AX25L2V2.

The command **RESPTIME** sets a delay between the receipt of a packet and the transmission of the acknowledgment packet. This delay is used to prevent collisions between an acknowledgment and another packet from the sending station. This is primarily necessary during file transfers; otherwise the delay is best set to 0. During file transfers the stations receiving the file should set **RESPTIME** to 10 or 12 (default).

The timing of packet transmission in Transparent Mode is determined by the command **PACTIME**. You can choose the way packet transmission is timed. If you are typing input to a remote computer it is usually best to have packets transmitted at regular intervals. If your computer is operating a remote-host or bulletin board program you should send packets after an interval with no further input from the computer. You can enable the use of **PACTIME** in Converse Mode with the command **CPACTIME**.

Monitor Functions

The MFJ-1278's protocol is designed for setting up "circuits" between two stations. However it can also operate in a mode more suitable for a "net" or "round-table" discussion with several participants, although reliable reception of all transmissions by every station cannot be guaranteed. This is done by enabling the monitor functions. Most of the monitor functions are described in Chapter 4.

Monitoring is enabled by the command **MONITOR ON**, and separate monitor functions are individually enabled.

If connected packet QSOs are taking place on the frequency of your group conversation, you may wish to ignore all connected packets while your group operates in unconnected mode. The command **MALL OFF** causes the MFJ-1278 to ignore connected packets.

If you want to be able to monitor packet activity when your station is not connected, but have all monitoring automatically cease when you connect to someone, set **MCON OFF**.

If you want to monitor stations selectively, you can set up

a list of up to eight callsigns with the command **LCALLS**. The callsigns in this list are regarded as "buddies," i.e., the only stations you want to listen to if **BUDLIST** is **ON**. Otherwise, the stations in the list will be ignored, and all other stations will be monitored.

You can operate a group conversation with some data integrity by having the stations connect in pairs and setting **MALL ON** and **MCON ON**. This does not insure that every packet is received at every station, but it does insure that a packet involved in a collision will be retried. If you have an odd number of stations participating in this sort of conversation, one station can connect to himself via another station as digipeater.

For example, **WB6YMH**, **WDOETZ**, **WA0TTW**, **W1BEL**, and **K9NG** wish to carry on a group conversation. In order to make all the transmissions as reliable as possible, the following connections are made.

WB6YMH connects to **W1BEL**
WA0TTW connects to **K9NG**
WDOETZ connects to **WDOETZ** via **W1BEL**

If each station specifies **MCON ON** and **MALL ON**, each station will see the packets sent by all the others.

Ordinarily, only text packets are displayed. If you want to see some of the protocol packets, you can set **MCOM ON** and connect, disconnect, disconnect acknowledgments, and **DM** (connect-request rejection) packets will be displayed. For example,

WB9FLW>N7CL <C>
KV7B>N2WX <D>

indicate connect and disconnect packets. Disconnect acknowledgments are designated **<UA>**, and **DM** packets are **<DM>**.

You can cause the MFJ-1278 to "filter" certain characters from monitored packets with the command **MFILTER**. This allows you to remove, for example, form-feeds, bell characters, or extra **<LF>**s that may be necessary to the stations involved in a connection, but which may interfere with your display. You can specify up to four characters by giving the ASCII character codes in hex or decimal.

Real-Time Clock and Time Stamping

You can enable the MFJ-1278's real-time clock by setting the date and time with the command **DAYTIME**. Once you have set the clock, you can request the time by entering **DAYTIME** with

no parameters. The format of date and time display is controlled by the command DAYUSA. If the MFJ-1278 is

software release supporting multiple-connections.

The **STREAMSwitch** character, defaulted to "|", should be set to a character you won't normally use. Note that this character may be set to a hex value between \$0 and \$FF. This may allow you to use 8-bit characters (**AWLEN 8**) if your terminal or computer is capable of generating such "characters." This could help prevent confusion in interpreting incoming data from other stations if they happen to send data that includes your selected **STREAMSwitch** character.

Although not fool proof, enabling **STREAMDBL** may also help in sorting out **STREAMSwitch** characters included in the received data from a valid stream switch generated by the MFJ-1278.

STREAMCall should be especially helpful when manually operating a station in which you allow multiple connections.

When in **CONVERSE** mode, you may switch streams by entering the **STREAMSwitch** character (default "|"), followed by a stream identifier ("A" through "J"), followed by the data you wish to send to the station on that stream. See the example in the description of **STREAMCall** for an illustration of this.

If all this seems a bit confusing, don't worry, it is! The only way to really understand multiple connect operation is to try it! Tested and on-the-air, Once you have gained confidence in "normal" packet operation, try setting **USERS 2** and get a couple of friends to connect to you. Play with the commands (you can't hurt the MFJ-1278 by issuing commands to it!) and see their effects.

Easy-Mail Mailbox

The Easy-Mail mailbox feature is only valid for the VHF packet mode. The operation of the Easy-Mail mailbox is quite simple. Once the MAILBOX command of your MFJ-1278 is turned on, anyone who operates AX.25 packet can access your mailbox by establishing a connection to your station by using the standard packet CONNECT command. Once the connection is made, he can send a message, obtain a list of the messages in your mailbox, read the messages or kill any messages addressed to him.

The Easy-Mail mailbox in the MFJ-1278 provides approximately 3,000 bytes of memory for message storage. Maximum number of message slots is 30.

With the MAILBOX turned ON, you can access the mailbox by

Verify that all the streams are disconnected.

2. Type:

USERS 1 <CR>.

3. Type:

|A <CR>, to force stream "A"

If you have changed the default STREAMSwitch character from \$7C, then you will have to use that character in

stead of "|".

Note: For the Commodore C64/128 or VIC-20 computers which do not have the "|" key. You can use the "£" key to replace the "|" key. To do this you will type:

STREAMSwitch 92 <CR>

£A <CR> to force stream "A".

4. If you want your message time and date stamped, set DAYTIME with the current information.

5. Type:

MAILBOX ON <CR>

Your MFJ-1278 is now ready for mailbox operation. You can access your mailbox operation by typing:

SYSOP <CR>

MFJ-1278 will respond with:

Mailbox (B, H(elp), K, L, R, S)>

Now you are ready to operate your mailbox. The functions of (B, H(elp), K, L, R, S) are as follows:

- o K -- Kill all messages addressed to you.
- o K ## -- Kill the message in slot nn. Remote users may only kill message addressed to them or originated by them. the local SYSOP, however, can kill all messages.

o L -- List the slot number, originator, destination

- o R ## -- Read the message in slot nn.
- o S call--Send a message to the callsign. "Call" must be a callsign valid under the same format as the MYCALL, CONNECT and other callsign commands.
- o SP call--Send a personal message to the callsign. This is a private message. Only the person the message is addressed to or the system operator can read this message.
- o B --Logout: Initiates a disconnect sequence from the mailbox.
- o H(Help)--Display the mailbox command list, with a brief description of commands available to the user.

Mailbox Operation

1. Establish connection to the mailbox station.
2. If the connection station's mailbox is ON, then it will answer with the mailbox prompt:

Mailbox Ready
Mailbox (B,H(elp),K,L,R,S)>

You may then type K to kill a message, L to list the messages, R to read the messages or S to send a message, B to logout and disconnect or H for the HELP menu.

- 3i. To send a message:

Type:

S Callsign <CR>

or

SP Callsign <CR>, if this is a private message.

- b. Mailbox responds with:

Title:

—

- c. Enter message subject (title) at the cursor prompt then press the "RETURN" key.
- d. Mailbox responds with:

Send Msg; Control-Z to end:
(Cursor)_

- e. Enter message at cursor prompt. At the end of the message type:

Control-Z <CR>

The message will be sent. The screen will blank and the cursor will be at the top of the page, with the mailbox commands.

- f. Your message will be seen on the mailbox station screen. Mailbox will respond with the mailbox prompt:

Mailbox (B,H(elp),K,L,R,S) >

- 3ii. To kill a message:

- a. Type:

K ## <CR>, ## is the slot number from 1 thru 30 to be killed.

- b. mailbox will respond with:

Message #_ deleted;
Mailbox (B, H(elp),K,L,R,S)>

Note that remote may only kill the messages that are

- b. Mailbox will respond with the message from the slot specified.
 - c. If you wish to read all the messages addressed to you, then you will want to type: R without the slot number. The mailbox will respond with messages only addressed to you.
4. If you wish to disconnect from the mailbox, then you can type:

B <CR>

to logout and disconnect from the mailbox.

If you access your MAILBOX by using the SYSop command, you must exit it by typing Control-C to return to command mode. This will allow remote users access to the MAILBOX.

5. Mail waiting is indicated by the flashing of the STA/MAIL LED on the front of the MFJ-1278.

The STA/MAIL LED of the MFJ-1278 serves two functions. It lights when unacknowledged packets are pending during a packet connection. If the MAILBOX is ON and you have mail waiting, the STA/MAIL LED will flash on and off if the MFJ-1278 is not connected to another packet station.

The "mail-waiting" LED function can be disabled by using the MAILED command. MAILED is defaulted to ON. When

Mailbox Messages

? Not while mail server enabled

This message occurs when you are trying to access the mailbox when the system operator is using his mailbox. Also when SYSOP tries to initiate a connect while he is the SYSOP.

You have mail!

Upon access to a mailbox, this message will appear if there are messages addressed to you.

?EH

This message occurs when a command issued is not understood by the mailbox. This could be out of range slot number, missing slot number where one is required, or bad command.

Cannot, not yours

This message occurs when a remote user attempts to kill a message which is not his, or he tries to read personal message by or for someone else.

?Mailbox full

This message occurs when either all of the available slots (30) are full, or the actual message space (3000 bytes) is full. Messages must be killed to recover from this error.

Not found

This message occurs when one attempts to read or kill a non-existent message from an empty slot.

Slotting and Acknowledgment Priority

The SLOTTING AND ACKNOWLEDGMENT PRIORITY feature is installed in the MFJ-1278 in an attempt to prevent or minimize packet collisions in a busy channel.

Use of the optional SLOTTING and ACKNOWLEDGMENT PRIORITY procedures now in the MFJ-1278 firmware significantly improve the reliability of packet radio connections on shared channels. The greatest improvement is yielded when all stations in a network are so equipped and configured with the appropriate, matching parameters.

SLOTTING improves channel efficiency by requiring each TNC to "flip" a many sided die whenever the channel goes from busy to not-busy. The result of the "flip" is the number of 10ms DEADTIME intervals the TNC waits before transmitting.

SLOTTING solves most of the problems that occur when there are two or more stations waiting to transmit when a third is already transmitting. Before slotting, the first two stations are definitely going to transmit at the same time, guaranteeing a collision. With slotting, the first station

The present protocol does not handle a simplex LAN with hidden terminals as well as it possibly could. This is primarily because, the present protocol is more likely to synchronize collisions with acknowledgment packets than with any other type of packet.

To this collision synchronization mechanism the current version of AX.25 adds a propensity to cause even ACKs which are not from hidden terminals (& therefore less susceptible to collision) to be delayed beyond even generous FRACK timer settings when the channel gets busy.

Once the FRACK timer times out, even if the ACK finally makes it through before the retry is sent, the original packet is retried anyway. This obviously wastes a lot of

3. Slot time windows are selected to be large enough that the local TNC will be able to unambiguously determine whether any other detectable station has selected any slot, preceding the slot selected by the local TNC.

This is to prevent two TNCs which have selected adjacent slots from colliding.

As you can see, under this protocol there will never be a condition where an ACK is delayed from being sent beyond the FRACK timer limitation. In fact, the FRACK timer becomes relatively meaningless in this context. However, in the current firmware release, The FRACK timer is still active and must be set to a value that is long enough to allow time for PACLEN + ACKWAIT to expire before FRACK does. This time will depend on the radio baud rate in use. The TNC knows that if it doesn't see the ACK immediately when expected, it is never going to see it. See discussion of new parameters below for definition of ACKWAIT.

Enforcing a channel access delay for all stations on the channel for whom the packet that caused the queue was not intended (& who therefore aren't going to ACK it) allows even ACKs from hidden terminals to get back to the expecting station. This clears that traffic from the offered load list. If the packet was indeed copied and ACKed, further retries of the same information will not be necessary.

New Parameters

There are several new parameters that relate to this modification of the protocol. They are as follows:

ACKPRIOR ON|OFF

This enables prioritized acknowledgments if turned on.

If ACKprior is turned off and SLOts (see below) is set to 0, this modification of the AX.25 protocol is effectively disabled. The MFJ-1278 will behave like normal AX.25 protocol.

Prioritized acknowledgments and slotted channel access can be enabled or disabled independently of one another. So you could if you wished run normal AX.25 with slotted channel access or the new protocol without slotted channel access.

This is the time between when a remote TNC has pressed PTT and when the local TNC can reasonably be expected to detect this fact.

This must be set to a value that accounts for the slowest acceptable station on the channel. It includes the time required for the remote station's radio to come on the air properly after assertion of PTT (TXDelay) and the time required for the local station's squelch (if used) and TNC DCD circuits to allow generation of a "DCD true" signal in the local TNC. Ideally, once the proper value for this timer is ascertained, all stations on the channel will use the same value.

Very preliminary testing done here on VHF indicates that measurements of the above delay times should be multiplied by 1.5 for use as the DEAdtime parameter. We had carefully measured the times for all stations participating in our tests. This gave us a worst case delay total of 210 milliseconds. When we ran the test, we were still getting about a 5 percent collision rate on the acknowledgements. We were required to increase the DEAdtime parameter to 30 (300 milliseconds) to completely eliminate collisions with ACKs.

The current default for this parameter is a ridiculously short 30 milliseconds. This represents only the worst case delay for the TNC's DCD circuit and completely ignores the radio delays.

A much more reasonable value for the timer on VHF NBFM 1200 baud AFSK is 300 milliseconds (DEADtime set to 30). This represents a relatively safe time for a radio that is usable for serious packet work.

Some HTs and every Azden PCS-2000s that I have ever seen are

ACKTIME 0 - 250 (also 10 millisecond increments)

This represents the time required to send a response frame (with no I field appended) at the baud rate being used on the radio port.

The current 100 millisecond default is close but should be adjusted for 1200 baud work to 130 milliseconds (ACKTime set to 13).

For 300 baud HF work this parameter should be set to 520 milliseconds (ACKTime set to 52).

SLOTS n $0 \leq n \leq 127$

This parameter determines how many sides are on the slot time dice. SLOTS represents an n+1 sided dice the MFJ-1278 "throws" before transmitting. The SLOTS command allows any number of slots from 1 thru 127 to be defined.

SLOTS (n)	REMARKS
1	Disables Slotting
2	
4	This should be the default setting
8	Use only if the channel is VERY busy.
16	VERY VERY VERY busy !
32	You get the idea.
64	
128	Might as well print it out & send it in the mail.

The value used on a particular channel should be agreed on by the channel users. Access to the channel will be equitably distributed among all users if everybody is using the same value for the SLOTmask and DEAdtime parameters.

The idea is to pick a value large enough that the probability of two queued up stations picking the same value is relatively small. On the other hand, the value chosen should be small enough that most of the time, ONE of the queued up stations will have a significant probability of picking the first available slot. In this way, the channel is reliably arbitrated and at the same time the overhead required for the arbitration is minimized so that overall throughput on the channel is maintained.

The actual value used will depend on the average number of queued up stations there are on the channel during busy periods.

ACKWAIT (not directly user settable)

This timer actually consists of the sum of the 2 user settable parameters ACKTime and DEAdtime. It represents the time the queued up TNC will wait before transmitting if it has selected slot 0. This allows time for a completely inaudible (to this TNC) ACK to have been sent on the channel without molestation. It was split into two timers because it has two unrelated components. One is related only to the baud rate being used on the channel. The other is related only to the absolute times the hardware requires to transport carrier information from one station to another on the channel.

Other Related Parameters

Several of the existing TNC parameters will affect the operation of the modified protocol. Most of these are parameters in TNCs on the channel which AREN'T using the new channel access procedure. One, FRACK, must be set correctly in any TNC which IS using prioritized ACK protocol.


FRACK should be set to a value which allows time for the TNC to send its packet AND receive the ACK. This value will depend on the settings being used for PAClen and the radio port baud rate. This is because, for some reason which I can't even begin to understand, the FRACK timer starts at the BEGINNING of the packet rather than at the end. For this reason, it is probably best to set FRACK to its worst case value for whatever baud rate you are using on the radio port. This way you can make adjustments to PAClen without

The settings to use for 300 baud work on a linear mode HF channel are:

ACKprior	ON
SLots	3
DEAdtime	12
ACKTime	52
DWait	0
RESPtime	0
MAXframe	1
FRACK	8

What to Expect

This modification to the protocol is compatible with stations using the current protocol in the following respect. A station using the new protocol will not degrade the channel for users of the current protocol. So there is nothing wrong with firing up the new stuff on a channel where the majority of the users aren't yet using it. You will be able to communicate with users of the other system

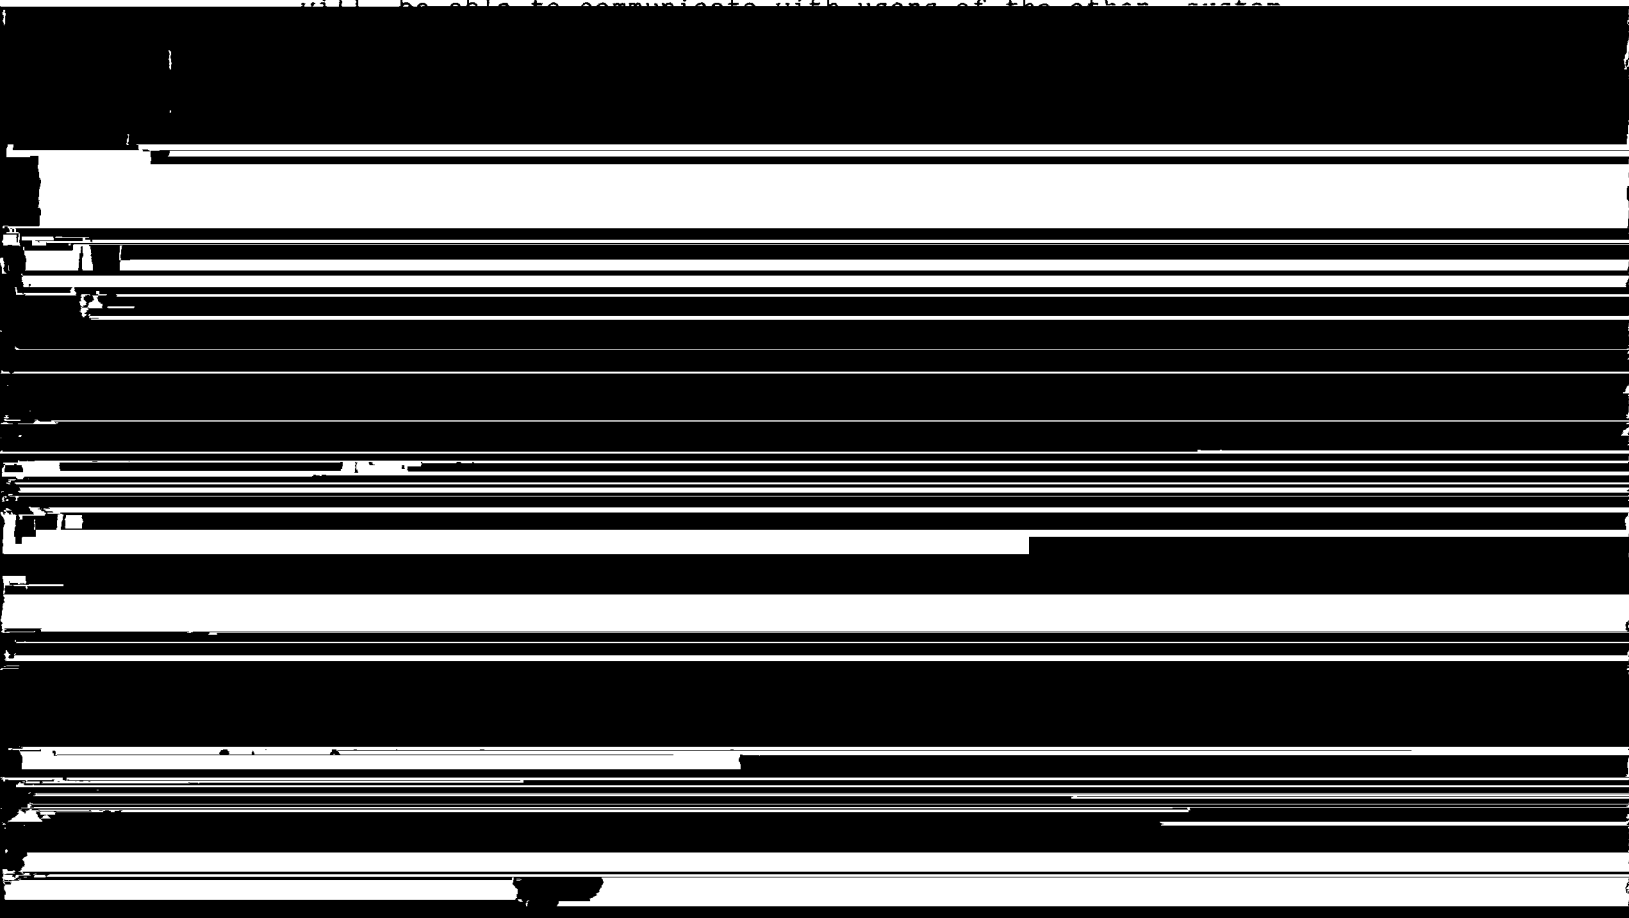

Remember that the objective of the new channel access procedures is to increase aggregate throughput for the CHANNEL, not necessarily for an individual user (not even you!). It may seem to you at first when you get on a very busy channel where you are the only station that is using the new system, that you aren't getting to transmit very frequently. This is because you aren't getting to transmit very frequently. However, the OTHER users on the channel will see an incremental increase in the overall amount of data that the channel can pass per unit time because you are being such a nice guy. Remember that transmitting isn't necessarily communicating.

There is ONE benefit that you should be able to see even under the above circumstances. If you are communicating with another station who is also running the new system, the channel should appear more reliable to you even if quite slow. You should not be getting retried out waiting for his ACK to come back & have to keep reconnecting.

As a higher and higher percentage of the users on the channel begin using the new system, the performance of the channel should increase quite a bit. However, we all must remember that if a channel is mathematically capable of transferring (for example) 1000 characters per unit time, the very best it can possibly do (if CSMA is working right)

Packet Picture Transfer

The MFJ-1278 gives you the unique ability to transmit and receive Packet Pictures. Unlike the binary file transfer ability common to all packet controllers that lets you transmit and receive picture files, MFJ-1278 lets you transmit and receive actual packet pictures directly. You can also transmit and receive FAX, SSTV and other graphics formats pictures with the MFJ-1278 in the VHF packet mode. Packet pictures received are directed to and printed on the built-in printer port on the MFJ-1278. Any EPSON (tm) or IBM (tm) graphics compatible printer may be used. Packet pictures can also be sent to the computer screen if special software, such as the MFJ-1284, is used.

Receiving Packet Pictures on Printer

Packet pictures data transmitted from the connecting packet station are received and data is sent directly to the printer attached to the MFJ-1278, without any intervening modification. Therefore, all data MUST use the same printer control codes that your printer uses. Typically **EPSON** format codes will be used.

The **PKTPIX** command provides a method for the MFJ-1278 to print packet pictures other graphics-format data transmitted by another station in the VHF packet mode. When you set **PKTPIX**, your MFJ-1278 becomes ready to print graphics data.

Using **PKTPIX**


Packet picture printing to the MFJ-1278 printer port requires you to first establish a packet connection with the station who is going to send the picture. Note that you won't be able to call up **PKTPIX** until the connection is made. You must have the printer powered and selected before MFJ-1278 will let you use the **PKTPIX** command.

Once these conditions are met, all data received over the packet link are sent directly to the printer. You can exit **PKTPIX** by using the escape-to-cmd: mode sequence for **TRANSPARENT** connections. Use **CTRL-C** three times (default), or asynchronous **BREAK**.

Packet pictures transfer to the computer screen

Packet pictures can also be received and displayed on the computer screen in real time. To achieve this special terminal program must be used. The MFJ Starter Pack for IBM

and compatibles (MFJ-1284) includes a program (MFJXFER) that allows you to transmit and receive CGA or EGA pictures in real time and display them on the screen. MFJXFER can transfer binary files to additional terminals. It

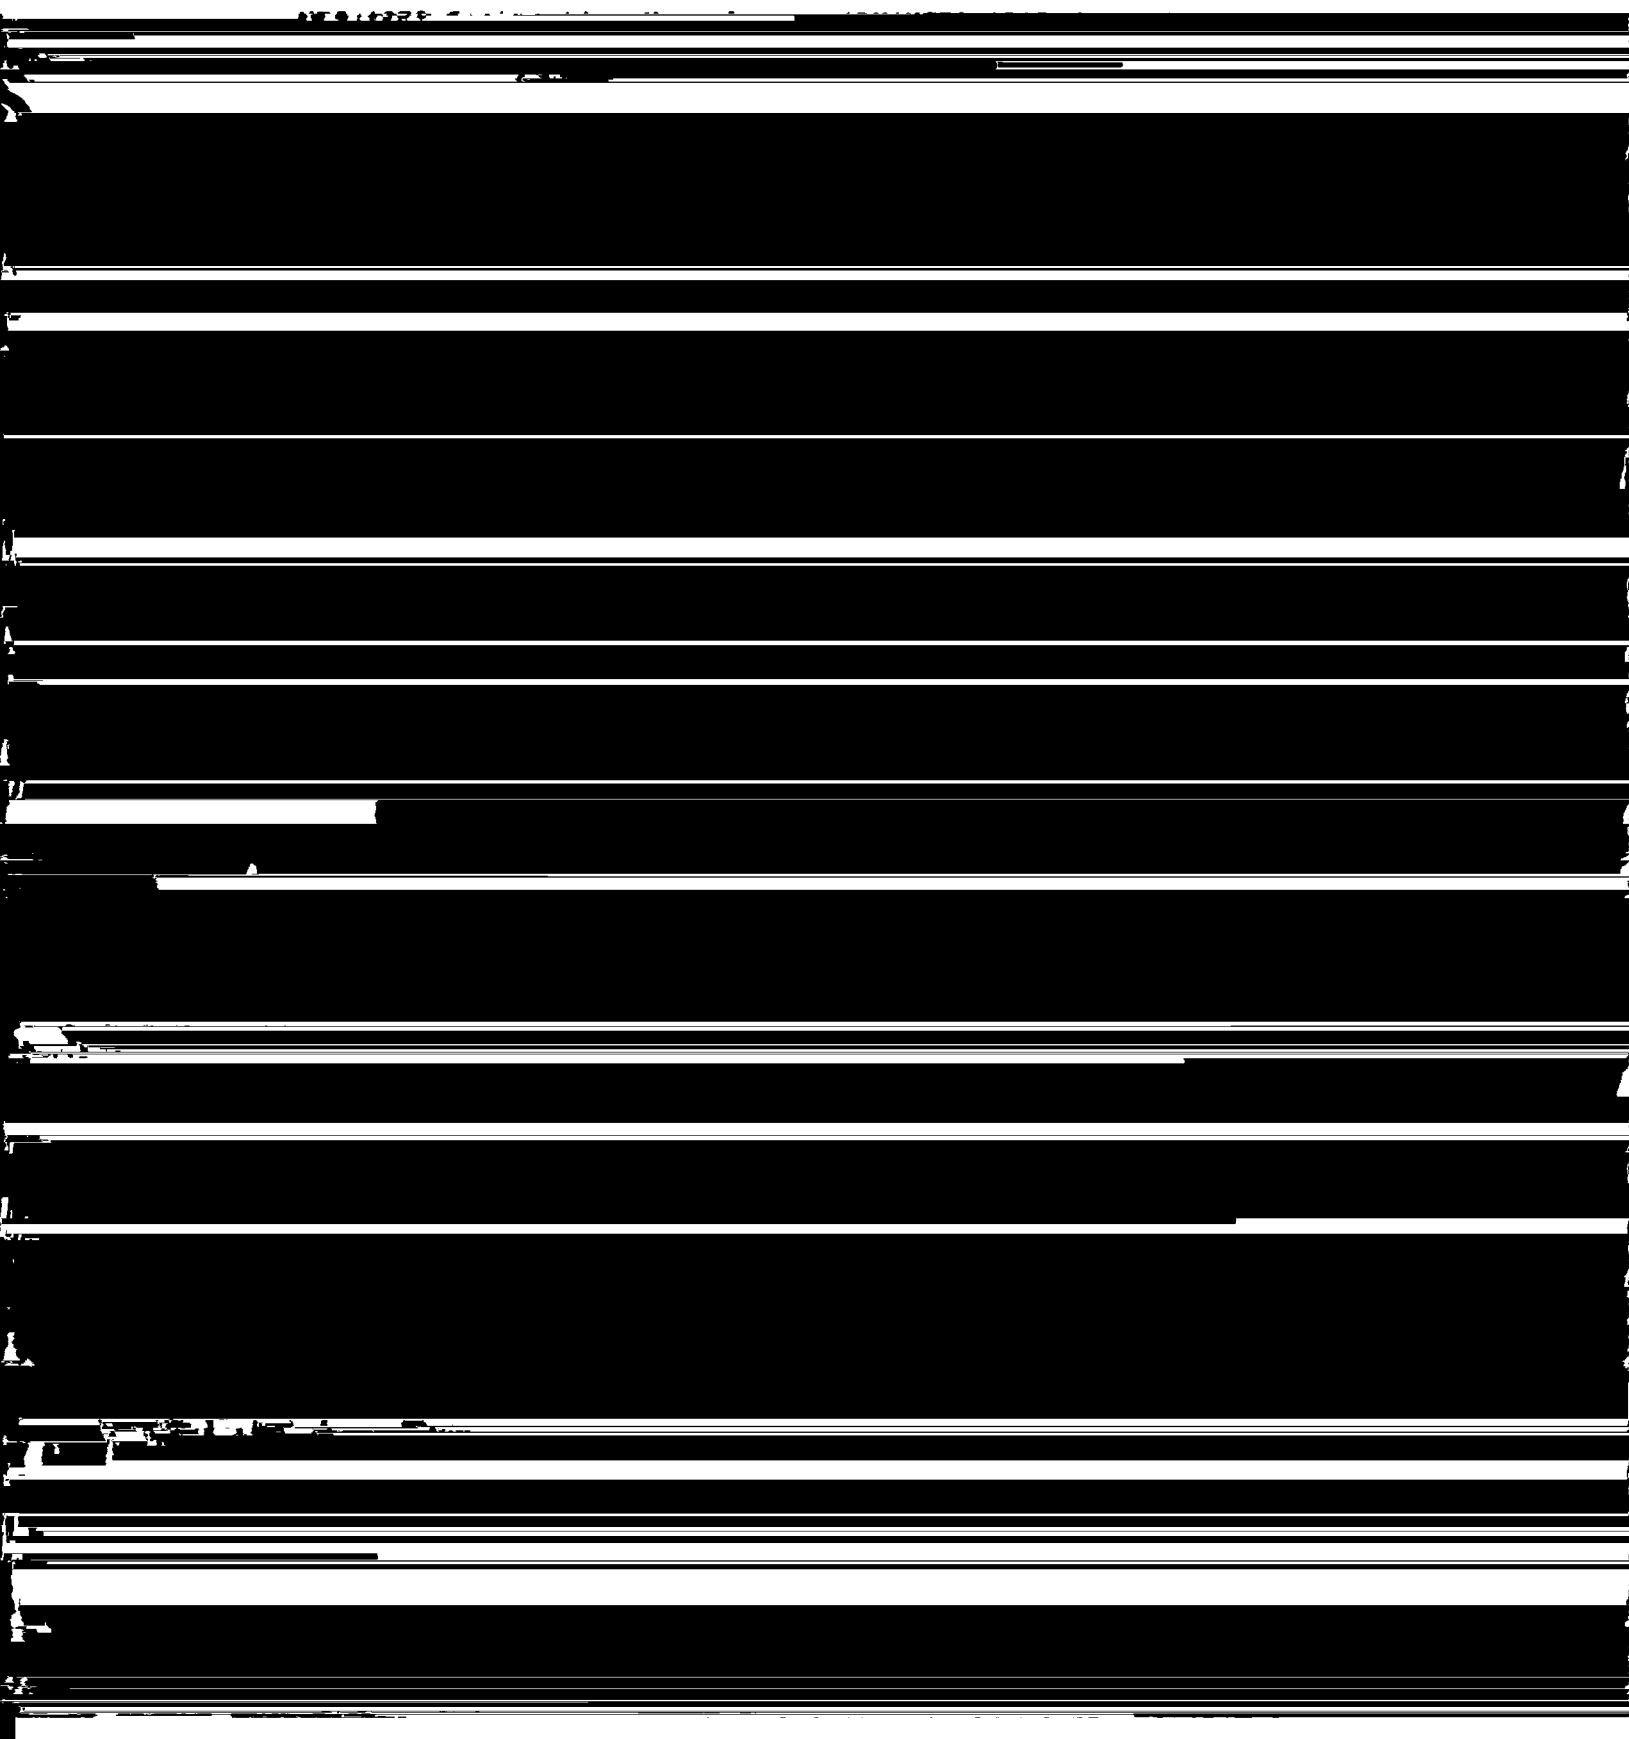

So you would use:

$$F(\text{emission}) = [F(\text{ind}) - F_c]$$

to determine the actual operating frequency for band edge or netting purposes. Remember to consider that you will be occupying a few hundred Hz on either side of $F(\text{emission})$.

NOTE: Regardless of the type of modem, whether or not the modem has audio filtering built in, 300 baud AFSK modem performance on a High Frequency linear mode (SSB as opposed to NBFM) radio channel will NOT be optimum UNLESS a filter of approximately 500 Hz bandwidth is used in the radio IF strip.

There are two reasons why this is the case. First, for the filtering to be fully effective, it has to precede the first

their relation to the LSB carrier oscillator and center of the 500 Hz filter is NOT presented here. Contact the manufacturer of the radio to obtain this information.

Radios which have provision for an auxiliary "narrow SSB" filter can have the 500 Hz bandwidth filter installed instead of the approximately 1.8 KHz wide "narrow" SSB filter. This will allow direct selection of the narrow filter for AFSK work when in SSB mode. If the filter is also desired for CW operation and you don't want to invest in 2 identical filters, it is usually a relatively simple modification to cause the radio to also select this filter when in CW mode. In the TS-430, for example, this requires moving one end of one diode on the IF board. The 270 Hz filter can then be installed in the "normal" narrow CW filter position making two bandwidths of narrow filter available for CW operation with all filters selectable from the front panel.

Some of the newer HF radios (and many older ones) allow selection of filter independent of mode. the TS-440 by Kenwood is an example of a recent design with this feature. For these radios it is a simple matter to select the required mode and the optimum filter independently of one another.

If the HF radio is to be dedicated to packet use, the 500 Hz filter can be installed in place of the SSB filter. This is possible on ANY radio designed for SSB and CW use.

It is important to use lower sideband rather than upper sideband if you are going to use a CW filter in the radio for packet operations. The reason for this is simple. The filter designed for CW operation is usually centered approximately 800 Hz away from the upper sideband suppressed carrier. This is the carrier oscillator which is normally used as the BFO on CW. This means that if the two carrier oscillators are 3 KHz apart, the CW filter center will be near 2200 Hz below the lower sideband carrier. This is the reason 2220 Hz was selected for the center frequency of the modem.

If you are going to use a narrow filter, and serious HF operation is NOT recommended without one, it will be necessary to take steps to be certain that the filter passband is centered over the modem center frequency. If your radio has IF shift, this is a simple matter. The tuning indicator and DCD LED are used to give you an indication of filter centering. The following discussion assumes that your radio has provision for IF shift.

To center your radio passband over the modem, use the

following procedure:

1. Set your radio for maximum RF gain.
2. Set the radio for lower sideband operation.
3. Make sure the MFJ-1278 is in HF Packet mode and that the HF Packet modem has been selected.
4. Set the audio output level so that the tuning indicator is responding to the background noise coming through the filter. This can be verified by observing whether or not the tuning indicator "follows" the noise as the IF shift control is rotated.
5. Tune to a frequency which has ABSOLUTELY NO signals in the passband. It is very important that only noise is coming through the filter. If you have access to a RX noise bridge, an alternative is to use the bridge as a noise source for the receiver. No antenna is required in this case.
6. Adjust the IF shift control on the radio so that the tuning indicator on the MFJ-1278 is centered in its display area.
7. Adjust the DCD threshold control on the front panel of the MFJ-1278 so that the DCD LED is flickering with false DCD indications. Make the adjustment so that the DCD duty cycle is more than 10 but less than 50 percent.
8. Carefully adjust the IF shift control on the radio to produce maximum DCD activity. This is the optimum point for the filter center frequency. Note the position of the IF shift control for future reference. This is the position you will want to use for all of the narrowband FSK modes.

If your radio has no provision for IF shift, you will have to determine the center frequency of the audio which is passed through the filter and realign the modem to the center frequency of the filtered audio. If you are lucky, this may turn out not to be necessary. The tuning indicator and DCD LED can be used to give you an indication when the modem is aligned with the filter similar to the indications described above. If the tuning indicator hovers around the center of the display when the modem is listening to noise

If you have determined that it is necessary to realign the modem center frequency to the radio filter center frequency, You should refer to Appendix D at the end of this instruction manual for the alignment procedure.

HF Packet Operation

Much has been said and written about the relative merits of HF versus VHF packet operation. HF packet operation is made to appear more difficult than VHF NBFM packet operation by several factors. Some of these are:

1. HF propagation is much more time variable and is more prone to produce intersymbol errors than is VHF propagation.
2. On the "published HF packet frequencies" many more stations are trying to use a single channel simultaneously than is the usual case on VHF.
3. Due to the wide area propagation characteristic of HF radio waves (sometimes nonreciprocal) with relatively dead "skipped" zones, the carrier sense multiple access (CSMA) feature of packet radio is a less than perfect arbitrator for time sharing the channel between users.
4. Many of the commercially available Terminal Node Controllers (TNC) for use on HF packet have data carrier detect (DCD) circuits which are of limited use or no use at all on a HF packet channel. This further degrades the effectiveness of CSMA.

The DCD circuit in the MFJ-1278 has been optimized for the HF packet mode. It can be adjusted to ignore background noise while still being able to promptly respond to a valid data carrier. It has a "hang time" feature that prevents DCD dropouts when short multipath hits occur or collisions put phase discontinuities in the received data carrier. Thus, most multipath conditions will not cause the MFJ-1278 to begin transmitting before the other station is in a listening mode. The DCD hang time also prevents the MFJ-1278 from "piling on" a collision between 2 other stations on the channel. The DCD circuit in the MFJ-1278 is NOT affected by the fact that there is a large amplitude difference between different signals on the same channel. So it will not allow you to collide with a relatively weak station which is transmitting immediately after a relatively strong station has

indicator at all and many others have an indicator that is only marginally useful. Unlike VHF FM operation, frequency error between transmitter and receiver cause frequency errors in the modem tones. This is the reason that a good tuning indicator is absolutely essential for HF packet operation. The tuning indicator makes it possible for the operator to reduce the modem to modem frequency error to near zero. Reliable HF packet operation requires tuning errors of ± 30 Hz or less.

6. Many of the stations currently operating HF packet do not have their radio bandwidth matched to the characteristics of a 300 baud 200 Hz shift FSK signal. This causes a severe degradation in modem performance resulting in unnecessarily increased numbers of retries and drastic reduction in data throughput for the SHARED channel.

Serious HF packet operation should not be considered without a 500 Hz filter in the receiver IF. An audio filter is NOT an acceptable substitute.

"Squeezing" the edges of SSB filters together with so called variable bandwidth tuning (VBT or PBT) to produce a 500 Hz bandpass is difficult to properly align and results in operation near the edges of the filters where the phase response and group delay characteristics are particularly poor. So while this offers some marginal improvement over wide filters, it is not a good substitute for a real 500 Hz filter.

In spite of the above factors, HF packet communications can be a reliable and enjoyable mode. The trick is to operate in a manner that allows you to avoid the problems mentioned above. Your purchase of an MFJ-1278 has already helped you avoid the DCD and tuning indicator difficulties. Configuring your radio bandwidth to match the spectral characteristics of the HF packet FSK signal will allow you to avoid the modem performance degradation that results from excessive radio bandwidth. However, you will still be affected by other station's problems in these areas when operating on a crowded packet channel.

If you do have your radio configured for the proper bandwidth, you will notice that many stations you connect to will seem to not be able to copy you as well as you copy them. Don't worry, your transmitter output isn't low, you are just observing the difference between a good demodulator behind the correct radio bandwidth and any kind of demodulator behind a radio which has far too much bandwidth for the mode.

The actual mechanics of operating the MFJ-1278 in the HF packet mode are the same as for the VHF packet mode. The main differences that will be apparent to you will be the slower baud rates, the higher incidence of propagation related effects and QRM, and the requirement for accurate tuning. It will take some practice before you can rapidly acquire another station's signal and initiate a contact.

The MFJ-1278 has a "threshold" adjustment for the DCD circuit. It will be necessary for you to set this adjustment correctly for the mode of operation and the bandwidth of the radio being used.

The adjustment is very easy to perform. Simply tune the radio to a channel which has only noise (no signals whatsoever), then adjust the threshold control so that the DCD LED just flickers occasionally. Set it so that the DCD duty cycle is between 10 and 20 percent. DO NOT set the threshold control so that the DCD LED never comes on even when receiving a signal!

If your radio has a bandwidth which is wide compared to the packet signal spectrum, the DCD LED may not flicker at ANY setting of the threshold control when monitoring only noise. In this case, set the threshold control to its maximum clockwise rotation. The data carrier detector will function normally when monitoring a signal in this case.

Tuning in a signal is relatively easy to do once you get the hang of it. You must wait until the other station is sending a packet, and then tune the transceiver so that the tuning indicator LED is centered. If the DCD LED is not lit, the tuning indicator information is NOT valid.

Each bar on the tuning indicator represents about 10 Hz. Thus, if a packet comes through and you are 4 bars off, re-tune your transceiver 40 Hz in the indicated direction. The direction depends on the sideband you selected and the manner in which you have the tuning indicator oriented. One or two tries will quickly tell you which way to go! Bars to the left of center indicate you should tune higher, while the other side of center means to tune lower.

Once you have the other station tuned in, you may initiate a connect request just as you would on VHF.

Many BBS stations forward traffic on HF at the above frequencies. Call CQ a couple KHz away from such channels. If you can't raise anyone, call CQ on one of the above frequencies, but QSY immediately after establishing contact! Be careful on 20 meters especially that you don't operate

propagation beacons and give packet a bad name...)

Calling CQ on HF is a bit different than on VHF. One technique which has proven effective when NOT operating on one of the congested calling frequencies is to do the following:

1. Find a clear frequency and monitor it for long enough to make sure it really is clear.
2. Set "UNProto" to CQ if it isn't already. This is the default field for this parameter.
3. Command the MFJ-1278 into converse mode by typing either:

K <CR>

or

CONV <CR>

4. Rapidly type a string of 15 to 20 carriage returns <CR>. This will cause the MFJ-1278 to send a continuous string of unconnected information (UI) frames. Since this will be a relatively long burst of packet transmission, the potential receiving station will have plenty of time to tune your signal in. To a receiving station this will appear on his screen as:

YOURCALL > CQ:

YOURCALL > CQ:

YOURCALL > CQ:

YOURCALL > CQ:

YOURCALL > CQ:

.
. .
. .
. .

One for each carriage return you typed.

Even a station which has no tuning indicator can eventually get you tuned in using this type of signal as he can tune around and watch his screen to see where printing is effective.

If you are meeting a friend on a schedule, you just set the "UNProto" field to "HISCALL" and do the same thing.

the "UNProto" field to "HISCALL" and do the same thing. When your friend finds you, this will appear on his screen as:

YOURCALL > HISCALL:

YOURCALL > HISCALL:

YOURCALL > HISCALL:

.
.
.

For as many <CR>s as you typed. Your friend will have little trouble finding you and tuning you in for the QSO.

5. After the MFJ-1278 finishes sending the string of CQ

polite to listen before you transmit!

Monitoring a propagation beacon frequency will not necessarily be sufficient to reveal this activity to you. It is best to make a note of which INDICATED frequencies you should avoid so that your radiated packet spectrum (from F(emission) above) will not get within several hundred Hz of a propagation beacon.

HF packet operation is fundamentally different than other modes of operation in 1 major respect. If you are on a clear channel, talking to only 1 other station, there will be long periods of silence. People using other modes and tuning around looking for a clear frequency to use may be fooled by the silence. Don't assume that an interfering station who shows up considerably after you have begun using the frequency is interfering on purpose, he may honestly not have been aware of your QSO in progress. For this reason, it is a good idea to keep the flow of the conversation going so that the lapses aren't too long. It can also be advantageous to have more than one packet QSO on the channel but if more than a very few get on the same channel, the throughput falls off very fast as the likelihood that all stations are properly configured and have working DCD circuits is small.

Here are a few simple suggestions for operating HF packet which should help to get you started.

1. Do NOT try to hold a QSO on one of the calling frequencies. Use the calling frequency only to establish contact and then MOVE OFF TO A CLEAR FREQUENCY to carry on the QSO. Remember to be aware of the frequencies your station is actually transmitting so you can avoid interference to other services such as propagation beacons etc.
2. Configure your station so that you can hear the activity on the channel. This will allow you to easily avoid interfering with other stations and also to quickly diagnose the problem when throughput suddenly falls off

DIGIPEAT (off . . . there is NO reason good enough
 to enable this function on HF)

DWAIT = 0 (off)

AX25V2 (off)

CHECK = 0 (off)

CMSG (off)

RETRY = 0 (try forever . . . but NOT if unattended
 operation. This allows YOU to be the one to
 decide when or whether to give up rather
 than the MFJ-1278. Typically you know more
 than the MFJ-1278 does about whether the
 other station is still trying or is likely
 to recover from the latest fade.)

MAXFRAME = 1 (multiple frames off)

RESPTIME = 0 (some stations may have trouble copying
 your ACKnowledgements (ACKs) when you
 respond this fast. This is due to the fact
 that some radios pump up the AGC voltage
 during transmit and if the AGC time
 constant is long, they are essentially deaf
 for a while after transmitting. You will
 want to experiment with this value. In
 general, you will want to use the minimum
 usable amount.)

5. Set FRACK to at least 8. 10 or 12 may be better on a very busy channel.
6. Restrict your use of beacon transmissions as much as possible. If you MUST use a beacon, keep it short and keep the repetition rate as low as possible. More than once a minute is definitely too frequent. once or twice in 10 minutes is more polite. Do not allow your beacons to continue if you are not in attendance. Nobody wants to connect to you just to be ignored.
7. If your radio allows you to select the AGC time constant (fast or slow AGC), set it to the fastest setting available to you.

If you cannot select fast AGC, it may be advantageous under some circumstances to partially defeat the AGC function by reducing RF gain and increasing AF gain. The demodulator in the MFJ-1278 is extremely insensitive to absolute audio level. It will function properly with

input levels from the low hundreds of millivolts up to many tens of volts. Thus, the variation in audio level produced by partially defeating the AGC system will not degrade the modem's ability to copy. The limiting factor on the high end is usually the ability of the receiver output stage to produce the voltage without clipping. The limiting factor on the low end is the hundred millivolts or so required to exceed the MFJ-1278's digital system noise seen at the demodulator input.

MFJ-1278 HOST MODE & TNC-2 MODE

One unique feature offered by the MFJ-1278 is that it can be switched into host mode to run programs such as TCP/IP, or it can be converted into a "like-TNC 2" controller. Once MFJ-1278 is converted, it can run any firmware written for the TNC 2, such as NET/ROM (tm), THE NET (tm) and other firmwares for the TNC 2 & clones. The procedure to convert the MFJ-1278 into a "like-TNC 2" is described in **Appendix E** in the instruction manual.

KISS Interface for TCP/IP

The KISS interface is installed in firmware of the MFJ-1278. Additional modification or replacement of firmware is not necessary.

KISS enables the MFJ-1278 to act as a modem for a host computer. Turning KISS on allows the MFJ-1278 to run programs such as TCP/IP and other programs which use the Serial Link Interface Protocol (SLIP).

Before enabling KISS, make sure radio band mode and terminal

OPERATION COMMANDS

This chapter serves as a complete reference to all MFJ-1278 commands. Commands are used to control the many variable values which affect the MFJ-1278's operation, as well as causing it to perform specific actions, such as connecting to another station to start a QSO. You can enter a command to the MFJ-1278 whenever you see the command-mode prompt:

cmd:

You will change parameters and issue instructions to the MFJ-1278 by typing commands composed of English-like words or word abbreviations, which are called keywords, and variables which are numbers or strings of characters chosen by the user. You will probably never change some of these parameters; however, one of MFJ's goals is to allow each user maximum flexibility to adapt the MFJ-1278 to his environment.

Entering Commands

You may use either upper case (capital letters) or lower case (small letters) when you enter commands. In order to have the MFJ-1278 accept a command line, you must finish the line with a <CR>, or carriage return character. This won't be mentioned explicitly in the examples below. Before you type the final <CR> of your command, you can correct typing mistakes or cancel the line completely. See Chapter 4 for a discussion of input line editing.

This chapter will use UPPER CASE for commands and lower case for explanatory text. In examples showing input typed by the user together with the responses of the MFJ-1278, the user's input will be shown in bold face.

Whenever the MFJ-1278 accepts a command which changes a value, it will display the previous value. For example, if you type

XFLOW OFF

you might see the display

XFLOW was ON

This reminds you of what you have done, and indicates that the value has been successfully changed.

If you type something the MFJ-1278 can't understand you will get an error message. If you type an unrecognized command, you will see the message ?EH. If you get a command name correct, but the arguments are wrong, you will see the message ?BAD. A complete list of error messages appears at the end of this chapter. For example,

```
cmd:ASDFASDF      || This isn't a command.  
?EH  
cmd:BEACON E      || A parameter was left out.  
?BAD
```

Command List

The commands are listed alphabetically, and each command entry contains several sections, as follows.

COMMAND NAME

The boldface command name at the top of the entry is the word you will type in order to have the MFJ-1278 execute this command. The command name is printed with some letters underlined. These letters form the minimum abbreviation that you may use and still have the MFJ-1278 understand your command. Of course, you may type out the entire command word, or any abbreviation longer than the minimum abbreviation, if you like.

For example, the command **MYCALL** may be specified by simply typing MY. The abbreviation M is not sufficient (and will be interpreted as a different command), but MY, MYC, MYCA, MYCAL or MYCALL are all acceptable.

If the command requires parameters, they will be indicated after the command name.

Default

For commands that set values, the MFJ-1278 assumes a "most often used" or default condition. The defaults are the values stored in EPROM which are loaded into RAM when the system is first powered up, or when you give the **RESET** command. Immediate commands perform actions rather than setting values, and don't have defaults.

Parameters

There are several types of parameters. Some parameters can have one of only two values, such as ON and OFF or EVERY and AFTER. If a parameter must be one of two values, the choices are shown separated by a vertical bar. You may use YES instead of ON and NO instead of OFF.

A parameter designated as **n** is a numeric value. These values may be entered as ordinary decimal numbers, or as hexadecimal, or "hex", numbers by preceding the number with a \$ symbol. When the MFJ-1278 shows some of these numeric parameters (those which set special characters), they will be given in hex. The "digits" of a hex number represent powers of 16, analogous to the powers of 10 represented by a decimal number. The numbers 10 through 15 are denoted by the hex digits A through F. For example,

$$\begin{aligned} \$1B &= 1*16 + 11 = 27 \\ \$120 &= 1*16*16 + 2*16 + 0 = 288 \end{aligned}$$

A parameter designated as **text**, such as the argument to CTEXT, may be entered in upper or lower case, and may include numbers, spaces, and punctuation. The text is accepted exactly as typed by the user.

Several commands require **callsigns** as parameters. While these parameters are normally Amateur call signs, they may actually be any collection of numbers and at least one letter up to six characters; they are used to identify stations sending and receiving packets. A **callsign** may additionally include sub-station ID (SSID), which is a decimal number from 0 to 15 used to distinguish two or more stations on the air with the same Amateur call (such as a base station and a repeater). The call sign and SSID are entered and displayed as call-n, e.g., KOPFX-3. If the SSID is not entered, it is set to 0, and SSIDs of 0 are not displayed by the MFJ-1278.

Some commands have parameters which are actually lists of items. For example, you may specify as many as eight callsigns to be selectively monitored with the command LCALLS. The second and later items in the list are optional, and you may separate the list items with blank spaces or with commas.

These examples may help you to understand the explanations above.

BEACON EVERY|AFTER n

means that the command BEACON requires an argument which must be either EVERY or AFTER (abbreviated to E or A), and an argument n which the user may choose from a range of values. An acceptable command might be BEACON E 2.

CONNECT call1 [VIA call2[,call3...,call9]]

means that the command CONNECT requires a callsign argument call1. You may optionally include the keyword VIA, followed by a list of one to eight callsigns, call2 through call9.

The **callsigns** in the list, if included, must be separated by commas (as shown), or by blank spaces. An acceptable command might be C N2WX V AD7I WB9FLW.

You can see the current value of the command's arguments by typing the command name by itself, without any arguments. For example,

cmd:CONOK Y		Sets the value to YES (ON).
CONOK was OFF		Displays previous value.
cmd:CONOK		Command with no arguments
CONOK ON		displays present value.

A special command, **DISPLAY**, allows you to see the values of all parameters or groups of related parameters.

Remarks

This section describes the command's action and the meaning of each argument. Examples may be included of situations in which the command might be used.

8BITCONV ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON The high-order bit is not stripped in Converse Mode.

OFF The high-order bit is stripped in Converse Mode.

This command enables transmission of 8-bit data in Converse Mode. If 8BITCONV is OFF, the high-order bit (bit 7) of characters received from the terminal is removed before the characters are transmitted in a packet. The standard ASCII character set requires only 7 bits, and the final bit is used as a parity bit or ignored. Setting bit 7 in text characters transmitted over the air may cause confusion at the other end.

If you need to transmit 8-bit data, but don't want all the features of Transparent Mode, you should set 8BITCONV ON and AWLEN 8. This may be desirable, for example, if you are using a special non-ASCII character set.

Bit 7 is always removed in Command Mode, since commands require only the standard 7-bit ASCII character set.

8LEVELS ON|OFF

Mode: FAX/SSTV

Default: OFF

Parameters:

ON The MFJ-1278 will transmit and receive FAX and SSTV in 8 gray levels

OFF The MFJ-1278 will transmit and receive FAX and SSTV in 4 gray levels

In FAX and SSTV modes, if 8LEVELS is also ON, MFJ-1278 will receive and transmit FAX and SSTV data in 8 levels of gray. 8LEVELS is effective only when MULTIFAX and TVX are turned ON. If MULTIFAX and TVX are set to OFF, MFJ-1278 is set to transmit and receive 2 levels of FAX and 4 levels of SSTV regardless of the setting of 8LEVELS (ON or OFF). 8 gray

AALT ON|OFF

Mode: AMTOR

Default: OFF

AALT controls whether the alternate SELCALL set by the ALTCALL command (below) is used in mode A ARQ.

ACKPRIORITY ON|OFF

Mode: Packet

Default: ON

ACKPRIORITY permits an acknowledging TNC to transmit without regard to the slotting delay. Turning ACKPRIORITY ON to enable prioritized acknowledgement.

If ACKprior is turned off and SLOts (see SLOts) is set to 0, the modified AX.25 protocol is effectively disabled. The MFJ-1278 will behave like normal AX.25 protocol.

Prioritized acknowledgments and slotted channel access can be enabled or disabled independently of one another. So you could if you wished run normal AX.25 with slotted channel access or the new protocol without slotted channel access.

ACKTIME nnnn

Mode: Packet

Default: 30 (300 ms)

Parameters:

nnnn 0 - 250, in 10 ms intervals.

The ACKTIME parameter controls a delay that occurs whenever any packets have been received by the MFJ-1278 that are not addressed to the MFJ-1278.

ACKTIME should be calculated by the radio channel baud rate, and by the keyup and keydown (TXDELAY and fixed timer, in

ALOCKCHAR nn Mode: CW/MCW Default: \$15 (^U)

This command controls which character is used to force the MFJ-1278 to lock its CW receive speed to the incoming signal. See CW operating instructions for more detail information when using alockchar.

ALTCALL "ssss" Mode: AMTOR Default: blank

Parameter:

ssss A set of four letter SELCALL for mode A amtor

ALTCALL is used to set up an alternate SELCALL that the MFJ-

ARCVCHAR nn Mode: RTTY/ASCII/CW Default: \$12 (^R)

ARCVCHAR specifies the character used in RTTY/ASCII/CW modes to return to receive mode after transmitting

ARQ "ssss" Mode: AMTOR Default: (command)

The ARQ command initiates a mode A "ARQ" connection. "ssss" is the SELCAL of the station you wish to connect with.

When ARQ is first issued, the MFJ-1278 begins to key the transmitter in attempt to establish the link. Both CON and

ASPECT n n = 2 thru 8 Mode: FAX Default: 2

ASPECT is used to establish a reasonable aspect ratio between horizontal and vertical presentation of FAX graphics. It is necessary to have an ASPECT control because the vertical density a dot matrix printer can represent is much less than the representable horizontal density.

The ASPECT setting is a ratio of printed: non-printed rows of FAX graphics. The default of 2 means that for every 1 printed FAX row, two rows are discarded. This is the optimum aspect ratio for HF weather FAX.

If your pictures seem to be elongated horizontally, you should decrease the value of aspect. The reverse (vertical elongation) is corrected by an increased aspect value.

AUTOBAUD ON:OFF

Mode: All

Default: ON

When AUTOBAUD is ON, the MFJ-1278 will attempt to synchronize with the user's terminal baud rate. When powered up, the MFJ-1278 will wait until it detects a carriage return from the keyboard. You should repeatedly strike the carriage return key on initial power up until the MFJ-1278 recognizes and sets its baud rate to match the terminal baud rate of your computer before signing on.

Once the MFJ-1278 has signed on, you may turn AUTOBAUD OFF. If AUTOBAUD is turned OFF, the MFJ-1278 will store the terminal baud rate which it signed on to last. Therefore, each time the MFJ-1278 is powered up, it will sign on without executing the autobaud routine. You should remember that if you turn AUTOBAUD OFF, if the terminal baud rate is changed, the MFJ-1278 will no longer be able to automatically reset to the new baud rate. AUTOBAUD must be turned ON, before the MFJ-1278 will automatically seek a new terminal baud rate.

If you must force the MFJ-1278 to autobaud after AUTOBAUD has been turned off and the terminal baud rate no longer matches the MFJ-1278 serial port baud rate, you will need to remove JMP 5 on the MFJ-1278 circuit board and remove power from the MFJ-1278 for several tens of seconds to reset the RAM which stores the non volatile operating parameters. Once reset in this manner, the MFJ-1278 will

AUTOLF ON|OFF

Mode: Packet

Default: ON

Parameters:

ON A linefeed character (<LF>) is sent to the terminal after each carriage return character (<CR>).

OFF A <LF> is not sent to the terminal after each <CR>.

AUTOLF controls the display of carriage return characters received in packets as well as echoing those that are typed in.

If the MFJ-1278's sign-on message lines appear to be typed over each other, you should set AUTOLF ON. If the MFJ-1278's sign-on message appears to be double-spaced, you should set AUTOLF OFF. If the MFJ-1278's sign-on message appears to be single-spaced, you have AUTOLF set correctly.

This command only affects what is displayed, not the data sent in packets. If you want to add linefeed characters to outgoing packets, use the command LFADD.

AUTOTRAC ON:OFF

Mode: CW

Default:ON

When **AUTOTrac** is set ON, the MFJ-1278 attempts to continuously track the CW speed changes of a station that is being received.

When the last reception speed greatly differs from the speed being now, the MFJ-1278 will automatically initiate a LOCK just as if you had requested one with "Control-U". If CWSPEEDMatch is on when this automatic locking takes place, then the newly locked speed also becomes your new transmit speed.

Small received speed changes do not cause your transmit speed to change.

AUTOTrac feature is useful for listening while roaming the bauds or for net operation.

AWLEN n

Mode: All

Default: 8

Parameters:

n 7 - 8, specifying the number of data bits per word.

This value defines the word length used by the serial IO terminal port.

For most packet operations, including conversation, bulletin board operation, and transmission of ASCII files, you should set AWLEN 7. If 8 bit words are transmitted to the MFJ-1278 in Command Mode or Converse Mode, the eighth bit is normally

AX25L2V2 ON|OFF

Mode: Packet

Default: ON

Parameters:

ON The MFJ-1278 will use AX.25 Level 2 Version 2.0 protocol.

OFF The MFJ-1278 will use AX.25 Level 2 Version 1.0 protocol.

Some implementations of the earlier version of AX.25 protocol (e.g., TAPR's TNC 1) won't properly digipeat version 2.0 AX.25 packets. This command exists to provide compatibility with these other TNCs until their software has been updated.

During the protocol transition period, you should set **AX25L2V2 OFF**.

After your local area TNCs are updated to the newer protocol version, you should set **AX25L2V2 ON**.

When **AX25L2V2** is ON, the MFJ-1278 answers L2 UI frames with P and C set with either: RR if connected (regardless of rcvr flow control state), or DM if not connected.

If retry limit is exceeded, or the MFJ-1278 receives a "disconnected" response to a poll, the connection is ended.

AXDELAY n

Mode: Packet

Default: 0

Parameters:

n 0 - 180, specifying the voice repeater keyup
 delay in 10 ms intervals.

AXDELAY specifies a period of time the MFJ-1278 is to wait, in addition to the normal delay set by **TXDELAY**, after keying the transmitter and before data is sent. This feature will be used by groups using a standard "voice" repeater to extend the range of the local area network. Repeaters with slow mechanical relays, split sites, or other circuits which delay transmission for some time after the RF carrier is present require some amount of time to get RF on the air.

If you are using a repeater that hasn't been used for packet operations before, you will have to experiment to find the best value for n. If other packet stations have been using the repeater, check with them for the proper setting. Note that this command acts in conjunction with **AXHANG**.

Note that the TAPR TNC 1 and other TNCs using the same version 3.x firmware interpret n in 120 ms intervals. The value set by **AXDELAY** on MFJ-1278 will thus be 12 times the value used by a TNC 1 user to give the same delay time.

AXHANG n

Mode: Packet

Default: 0

Parameters:

n 0 20 specifying the voice repeater hang

an audio repeater with a hang time greater than 100 ms is used. For a repeater with a long hang time, it is not necessary to wait for the repeater keyup delay after keying

BBSMSGs ON|OFF

Mode: Packet

Default: OFF

This command controls how the MFJ-1278 displays certain messages in command and CONVERSE modes. The messages affected are described below:

<u>MESSAGE</u>	<u>EFFECT WHEN BBSMSGs ON</u>
CONNECTED to xxxx	-A newline is added just before""
***DISCONNECTED	- " "
***retry limit exceeded-	- " "
***xxxx Busy	- " "
***FRMR sent	- " "
***FRMR rcvd	- " "

***Connect request:xxxx-This message is omitted.

The BBSMSGs command is primarily useful for host operation. Primarily with WORLI and like bulletin board systems that require link status messages to begin in the first output column.

The connect request message is omitted during BBSMSGs mode. This should be most useful for preventing corruption of messages when forwarding with small frames.

BEACON EVERY|AFTER n Mode: Packet Default: EVERY 0

Parameters:

EVERY	Send beacon at regular intervals.
AFTER	Send beacon once after the specified time interval with no packet activity.
n	0 - 250, specifying beacon timing in 10 second intervals. A value of 0 disables the beacon.

This command enables beacon sending and causes the first beacon frame to be transmitted. A beacon frame consists of the text specified by BTEXT in a packet addressed to "BEACON" and sent via the digipeat addresses specified by the UNPROTO command, if any.

If the keyword **EVERY** is specified, a beacon packet is sent every $n*10$ seconds. This mode might be used to transmit packets for testing purposes.

If **AFTER** is specified, a beacon is sent only after $n*10$ seconds have passed with no packet activity. In this case, the beacon is sent only once until further activity is detected. This mode can be used to send announcements or test messages only when packet stations are on the air. If you choose n properly you can avoid cluttering a busy channel with unnecessary transmissions.

Beacon frames from other TNCs can be monitored by setting MONITOR ON.

NOTE: BEACONS will not be sent if BTEXT is null.

BKONDEL ON|OFF

Mode: Packet

Default: ON

Parameters:

- ON The sequence <BACKSPACE> <SPACE> <BACKSPACE> is echoed when a character is deleted from the input line.
- OFF The <BACKSLASH> character (\) is echoed when a character is deleted.

This command determines the way the display is updated to reflect a character deletion in Command Mode or Converse Mode.

The <BACKSPACE> <SPACE> <BACKSPACE> sequence will properly update the screen of a video display. If you have a video display terminal or computer, you should set BKONDEL ON.

The <BACKSPACE> <SPACE> <BACKSPACE> sequence on a printing terminal would result in overtyped text. If you have a paper-output display, or if your terminal does not respond to the <BACKSPACE> character (CTRL-H), you should set

BTEXT text

Mode: Packet

Default: ""

BUDLIST ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON Ignore frames from stations which are not in the LCALLS list.
- OFF Ignore frame from stations which are in the LCALLS list.

BUDLIST works in conjunction with the command LCALLS, which sets up a callsign list. These commands determine which packets will be displayed when you have set MONITOR ON. BUDLIST specifies whether the callsigns in the list are the ones you want to ignore or, alternatively, are the only ones you want to listen to.

If you want to listen only for packets from a limited list, you should enter this list with LCALLS and set BUDLIST ON. You can use this feature, for example, to have your TNC "keep an ear out" for a particular station while you converse with someone else.

If you want to ignore packets from a limited list, you

BUFn n = 0 thru 9 Mode: CW/RTTY/ASCII Default: empty

You may load up to ten buffers for use in CW/RTTY/ASCII modes. Maximum buffer text for each buffer is 120 characters. Note that when loading buffer text, there is no space between the word "BUF" and the buffer number selected.

Buffers may be transmitted by setting up for the appropriate

BUFTIME n n= 0 thru 65535 Mode: CW

Default: 0

When a nonzero BUFTIME is specified, the MFJ-1278 will transmit Buffer 0 at a repetition rate specified by BUFTIME. BUFTIME is effective only in CW mode. If the transmitter is not keyed, the buffer timer will key it, send the buffer, then release it. This is useful for beaconing, calling CQ, etc. BUFTIME can be turned off by setting it to 0.

BWNL ON|OFF

Mode: AMTOR

Default: OFF

BWNL controls whether the MFJ-1278 in mode B FEC waits for you to send a newline character (<CR>) before it starts transmitting the data.

If BWNL is OFF then every character you transmit in mode B will be sent as soon as possible.

If it is ON, the MFJ-1278 will buffer the entire line sending it only when you have completed it and struck the RETURN key, allowing you to fix typing mistakes before transmission.

CALIRA

Mode: All

CALIBRA is an immediate command, and is used to transfer control to the modem calibration routine. Calibration may be performed at any time without altering the current link state.

Briefly, the commands available in the calibration routine are:

<SPACE> Switch the transmit audio to the other tone.
D Alternate between the two transmit tones at a rate determined by the radio baud rate.
K Toggle PTT line on/off.
Q Quit calibration routine.

CALSET n

Mode: All

Default: NONE

Parameters:

n 0 - 65535, specifying the count setting for use by the calibration routine.

The number to be specified by **CALSET** is determined by the frequency **f** to be calibrated as follows.

$$\begin{aligned} n &= (525,000 / f) + 1 && \text{(modulator tones)} \\ n &= (262,500 / f) + 1 && \text{(demodulator tones)} \end{aligned}$$

Round **n** to the nearest integer. To calibrate the modem tones, you will set **n** for the desired frequency using **CALSET**.

CANLINE n Mode: Packet Default: \$18 <CTRL-X>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command is used to change the cancel-line input editing command character. The parameter n is the ASCII code for the character you want to type in order to cancel an input line. You can enter the code in either hex or decimal.

For example, to change the cancel-line character to <CTRL-U>, you would set CANLINE \$15 or CANLINE 21.

If you cancel an input line in Command Mode, the line will be terminated with a <BACKSLASH> character, and you will see a new cmd: prompt. If you cancel a line in Converse Mode, you will see only the <BACKSLASH> and a new line. You can cancel only the line you are currently typing. Once a <CR> has been entered, you can not cancel an input line using the cancel line character. Note that if you send packet char

CANPAC n

Mode: Packet Default: \$19 <CTRL-Y>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

CANPAC is used to change the cancel-packet input editing command character. The parameter n is the ASCII code for the character you want to type in order to cancel an input packet. You can enter the code in either hex or decimal.

If you cancel a packet in Converse Mode, the line will be terminated with a <BACKSLASH> character and a new line. You can only cancel the packet that is currently being entered. Once you have typed the send-packet character, or waited PACTIME (if CPACTIME enabled), the packet can not be canceled even if it has not been transmitted.

Packet cancellation, like other input editing features, is disabled in Transparent Mode.

Cancel Display Output

The cancel-packet character also functions to cancel display output in Command Mode. If you are in Command Mode and type the cancel-packet character, any characters that would be typed on the screen (except echoed characters) are "thrown away" by the MFJ-1278. Typing the cancel-output character a second time restores normal output. To see how this works,

CBELL ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Connect bell enabled

OFF Connect bell disabled

This command is used to control whether an ASCII \$07 (BELL) character is sent as part of the connected message.

When set ON, the bell character immediately precedes the asterisk portion of the connected message, e.g.:

<BELL>*** Connected to: <callsign>

When CBELL is ON a tone will also be heard on the external speaker. A speaker must be connected to the SPEAKER jack in the rear panel of the MFJ-1278.

CCITT ON|OFF

Mode: RTTY

Default: ON

The CCITT parameter selects either an internationally recognized character set (CCITT) or the "U.S. TTY" standard. The latter is used by many older, surplus mechanical teletypes that have been taken out of commercial service and

placed into amateur use. This parameter is only significant

CHECK n

Mode: Packet

Default: 30

Parameters:

n 0 - 250, specifying the check time in 10 second intervals. A value of 0 disables this feature.

This command sets a connection timeout. If a link connection exists between the MFJ-1278 and another station, and the other station "disappears," your MFJ-1278 could remain in the connected state indefinitely, refusing connections from other stations. This might happen if propagation changes unexpectedly or an intermediate digipeater station is turned off. In order to prevent this sort of lockup, the MFJ-1278 will try to clean up the link if the specified time elapses without any packets being heard from the other TNC. The operation of this feature depends on the setting of AX25L2V2.

If AX25L2V2 is ON, the MFJ-1278 will send a "check packet" to verify the presence of the other station if no packets have been heard from it for $n \times 10$ seconds. This frame contains no information, but is interpreted by the receiving

CLKADJ n

Mode: Packet

Default: 0

Parameters:

n 0 - 65535, specifying the correction factor
 to be applied to the real-time clock routine.

A value of "0" is a special case and means no correction
factor will be applied. If the value of CLKADJ is non-zero,
then the correction factor is calculated as:

$$\text{relative clock speed in \%} = 100 - \left(9.16667 * \frac{1}{n} \right)$$

The relative clock speed is used to keep track of time

CMDTIME n

Mode: Packet

Default: 1

Parameters:


n 0 - 250, specifying Transparent Mode timeout value in 1 second intervals. If n is zero, the only exit from Transparent Mode is to send a BREAK signal or interrupt power to the MFJ-1278.

This command sets the Transparent Mode timeout value. In order to allow escape to Command Mode from Transparent Mode while permitting any character to be sent as data, a guard time of n seconds is set up.

The same Command Mode entry character used for exit from Converse Mode is used to exit Transparent Mode, but the procedure is different. (The Command Mode entry character is set by COMMAND.) Three Command Mode entry characters must be entered less than n seconds apart, with no intervening characters, after a delay of n seconds since the last characters were typed. After a final delay of n seconds, the MFJ-1278 will exit Transparent Mode and enter Command Mode. You should then see the prompt

cmd:

The diagram below illustrates this timing.

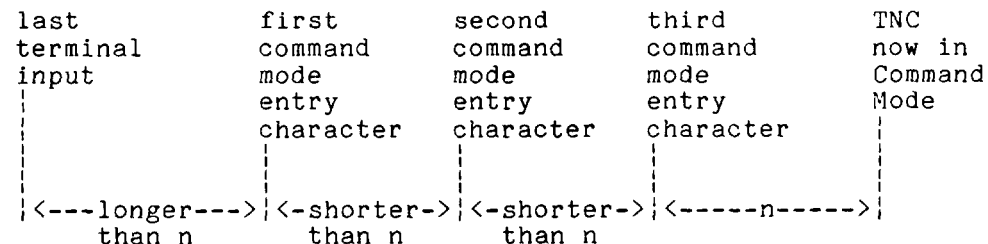

CMSG ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON A text message is sent as the first packet
after a connection is established.

OFF The text message is not sent.

CMSG enables automatic sending of the message set by CTEXT
whenever your MFJ-1278 accepts a connect request from
another TNC.

For example, if you have left your station running even
though you don't want to operate just now, you might want to
set CMSG ON to let people know that you can't talk when they

COMMAND n Mode: All Default: \$03 <CTRL-C>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command is used to change the Command Mode entry character. You can enter the code in either hex or decimal.

Command Mode is entered from Converse Mode when this character is typed. If you type the Command Mode entry character while you are already in Command Mode, nothing will happen. To see how this works, enter Converse Mode by typing **CONVERS**. Anything you type will become packet data. Now type a <CTRL-C>. You will see the Command Mode prompt, indicating successful exit to Command Mode. The display might look like this:

```
cmd:CONVERS
Hello World! I'm on the air on packet radio!
[enter <CTRL-C>]
cmd:
```

See the entry under **CMDTIME** or the discussion of Transparent Mode in Chapter 5 for information on how the Command Mode entry character is used for escape from Transparent Mode.

CONMODE CONVERS | TRANS Mode: Packet Default: CONVERS

Parameters:

CONVERS Sets automatic entry to Converse Mode when a connection is established.

TRANS Sets automatic entry to Transparent Mode when a connection is established.

CONMODE controls which mode the MFJ-1278 will be placed in after a connection. The connection may result either from a connect request received over the air or a connect initiated by a **CONNECT** command that you issue. For most operations, you would set **CONMODE** to **CONVERS**. However, if you are using Transparent Mode for a bulletin board program, for example, you would set **CONMODE** to **TRANS** so that the correct mode will be entered when your bulletin board receives a connect request.

If you initiate a connection with the **CONNECT** command, the timing of the entry into Converse or Transparent Mode is determined by **NEWMODE**.

If the MFJ-1278 is already in Converse or Transparent Mode when the connection is completed, the mode will not be changed. If you have typed part of a command line when the connection is completed, the mode change will not take place until you complete the command or cancel the line. This prevents the last part of your command from inadvertently being sent as a packet.

CONNECT call11 [VIA call12[,call13...,call19]] Mode: Packet

Parameters:

call1 Callsign of TNC to be connected to.

call2 Optional **callsign** of MFJ-1278 to be digipeated through. As many as eight digipeat addresses can be specified.

The part of the command line in brackets, **VIA call12[, call13...,call19]** is optional. The double-bracketed text, **,call13...,call19**, is also optional, but would only be used if **VIA call12** is present. The brackets are not typed.

Each **callsign** may include an optional sub-station ID specified as **-n** immediately following the **callsign**. The digipeat fields are specified in the order in which you want them to relay the packets to the destination, **call11**.

CONNECT is an immediate command. It initiates a connect request to MFJ-1278 **call11**, optionally through digipeaters. If **NEWMODE** is **ON**, the MFJ-1278 will immediately enter Converse Mode or Transparent Mode, as specified by the

CONOK ON|OFF

Mode: Packet

Default: ON

Parameters:

ON	Connect requests from other TNCs will be accepted.
OFF	Connect requests from other TNCs will be rejected.

This command determines the action taken by the MFJ-1278 when a connect request for it is received though the radio. If **CONOK** is **ON**, the request will be acknowledged, the standard connect message will be typed and either Converse or Transparent Mode will be entered, depending on the setting of **CONMODE**.

If **CONOK** is **OFF** and the MFJ-1278 is not in Transparent Mode, the TNC will notify you of the connect attempt with the following message.

connect request: <call>

The **callsign** of the station trying to connect will replace <call>.

All connect requests from stations with totally blank callsigns are rejected with a busy response.

The MFJ-1278 will also issue a DM packet, or "busy signal" to the requesting station. The user may then issue his own connect command. If the MFJ-1278 receives a DM packet in response to a connect request, it will type the message

*** <call> station busy

with the **callsign** of the station that sent the DM packet in place of <call>.

For example, if you want to leave your station running as a digipeater you might set **CONOK OFF** until you are ready for a conversation. If you get a connect request in the meantime, you can change your mind. Stations attempting to connect to your MFJ-1278 will be able to see that the station is up but not available for connection (it might still be useful as a digipeater).

CONSTAMP ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Connect and disconnect status messages are
 time stamped.

OFF Connect status messages are not time stamped.

This command enables time stamping of *** CONNECTED status messages. The date and time information is then available for use by Bulletin Board programs or other computer applications. The date and time must be set initially by the DAYTIME command before time stamping will occur. The date format is determined by the DAYUSA command.

For example, if CONSTAMP is ON, DAYUSA is ON, and the date

CPACTIME ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Packet timeout is used in Converse Mode.

OFF Packet timeout is not used in Converse Mode.

This command enables the periodic automatic sending of packets in Converse Mode. This feature may be used for computer communications, such as Bulletin Board operation, when the full Transparent Mode features are not desired.

If **CPACTIME** is **ON**, characters are packetized and transmitted periodically as they are in Transparent Mode, but local editing and display features of Converse Mode are enabled, and software flow control may be used. For a discussion of how periodic packetizing works, see the command **PACTIME**, which controls the rate and mode of packet assembly.

You should set **CR OFF** in this mode, since otherwise the send-packet character will be inserted in the data being packetized even though it was not typed. In order to include **<CR>** characters in transmitted packets, set **SENDPAC** to a normally unused character (e.g., **<CTRL-P>**), at which point the TNC will treat **<CR>** as an ordinary character.

You can set **CPACTIME ON** for a mode of operation similar to full break-in CW, in which your text is transmitted soon after you type it, but in short bursts of a few characters, and the other station may break in at will. Some operators find it easier to carry on a conversation in this mode, since it eliminates the delays while long packets are being typed.

CR ON|OFF

Mode: Packet

Default: ON

Parameters:

- | | |
|-----|---|
| ON | The send-packet character, normally <CR>, is appended to all packets sent in Converse Mode. |
| OFF | The send-packet character is not appended to packets. |

When CR is ON, all packets sent in Converse Mode will include, as the last character of the packet, the send-packet character which forces the packet to be sent. If CR is OFF, the send-packet character is interpreted solely as a command to the MFJ-1278, not as data to be included in the packet, and furthermore, it will not be echoed to the terminal.

Setting CR ON and SENDPAC \$OD results in a natural conversation mode. Each line is sent when a <CR> is entered, and arrives at its destination with a <CR> at the end of the line. If the station at the other end reports overprinting of lines on his display, you can set LFADD ON, or the other station can set AUTOLF ON.

CTEXT text Mode: Packet Default: ""
Parameters:

 text Any combination of characters and spaces, up
 to a maximum length of 120 characters.

CTEXT specifies the text of the packet to be sent after a connection is made, if **CMSG** is **ON**. The default **text** is an empty string, i.e., no message.

You can send multiple-line messages by including carriage return (<CR>) characters in the text. The <CR> character can be included by using the pass character immediately preceding it (see the **PASS** command). If you enter a **text** string longer than 120 characters, an error message will appear and the command will be ignored.

For example, you might set your **CTEXT** message to

 I'm not here right now, but you may leave a message.

To clear the **CTEXT text** without issuing a **RESET** command, use a % or & as the first character in the message.

You cannot connect to yourself and see your **CTEXT**. **CMSG** only takes effect if you are connected to by another TNC.

CSTATUS Mode: Packet

CSTATUS

Mode: Packet

CSTATUS is an immediate command which shows the stream identifier and link state of all ten streams (links), the current input and output streams, and whether or not each stream is "permanent" (see CONPERM).

An example of a display resulting from issuing a CSTATUS command is:

```
cmd:CS
A stream - IO Link state is: CONNECTED to 305MLB
B stream -   Link state is: CONNECTED to AD7I P
C stream -   Link state is: DISCONNECTED
D stream -   Link state is: CONNECTED to NOADI
              via K9NG-2
```

...

```
I stream -   Link state is: CONNECT in progress
J stream -   Link state is: CONNECTED to KV7B
              via NK6K-1
```

The example above shows the A stream is assigned both the input and output streams. The B stream is connected to AD7I

CWSENDCH nnn

Mode: CW

Default:000

This controls when the MFJ-1278 transmits the pending text in the CW buffer. It is only effective for CW and MCW modes.

If this is left at the default of 000, the characters to be transmitted are left buffered and unsent until such time as either a SPACE, CARRIAGE-RETURN, or other control character is sent.

To have more control over when pending transmit characters are sent, enter it as the new CWSEndch value. For example, setting CWSEndch to \$02 will cause the MFJ-1278 to buffer CW characters for transmission until a CTRL-B (or CTRL-R which always transmits the buffer) character is typed.

To enable immediate transmission, enter CWSEndch 255. This tells the MFJ-1278 to send everything right away, without delaying for a space or CARRIAGE-RETURN like CWSEndch 000

DAYTIME date&time

Mode: Packet

No default

Parameters:

date&time Current date and time to set.

This command allows you to set the current date and time. Can

DAYUSA ON|OFF

Mode: Packet

Default: ON

Parameters:

ON Date is displayed in the format mm/dd/yy.

OFF Date is displayed in the format dd-mm-yy.

This command determines the format for the MFJ-1278's display of the date. If DAYUSA is ON, the standard U.S. format is used; if DAYUSA is OFF, the standard European format is used. This command affects the format of the date display used in "time stamps" as well as the display when DAYTIME is entered without parameters. The format for entering the time using DAYTIME is not affected.

For example, if DAYUSA is ON, then July 2, 1984 at 9:28:44 AM would be displayed as

```
cmd:DAYTIME
07/02/84 9:28:44
```

If DAYUSA is OFF the same date and time would appear as

```
cmd:DAYTIME
02-07-84 9:28:44
```

DEADTIME nnn

Mode: Packet

Default: 33 (330 ms)

Parameter:

nnn 0 thru 250 in 10ms

The DEADTIME parameter selects the basic time interval used
by the plotting procedures. A delay of length (random

DELAY "nn" Mode: AMTOR Default: 20 (msec)

The DELAY command establishes the interval that the MFJ-1278 delays between keying the transmitter and transmitting AMTOR.

AMTOR mode A ARQ demands a transceiver that switches from receive to transmit, and back to receive, quickly. Some rigs are faster than others. When you install the MFJ-1278 for the first time on a particular radio, it's a good idea to experiment with various DELAY times, working towards the minimum delay.

Note that if you're completely unable to work anyone in MODE A, but you can work people in modes B and S, it is possible that you are not using enough DELAY. Try increasing it until MODE A works reliably.

DELCHR n Mode: CW/RTTY/ASCII Default: Ctrl-X

The DELCHR command is effective for erasing the contents of the CW/RTTY/ASCII buffers during transmission. The DELCHR default is a "Control-X".

DELETE ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON The delete character input editing character is <DELETE> (\$7F).
- OFF The delete character input editing character is <BACKSPACE> (\$08).

This command is used to change the input editing command for character deletion. When this character is typed, the last character from the input line is deleted. How the TNC indicates the deletion is controlled by the **BKONDEL** command.

You can not use this character to delete past the beginning of a line, although you can delete <CR> characters that have been entered in the text with the pass character.

To see a corrected display of the current line after you have deleted characters, type the redisplay-line character, which is set by the **REDISPLA** command.

DIDDLE ON|OFF

Mode: ASCII/RTTY

Default: ON

During ASCII/RTTY transmit, the MFJ-1278 sends a non-printing synchronization character, **DIDDLE**, whenever the transmitter is keyed but not sending anything else.

The **DIDDLE** characters for ASCII and RTTY are NUL and LTRS, respectively.

Diddling while the transmitter is keyed makes it much easier for persons receiving to tune and remain tuned to your transmitted signal.

Some stations running mechanical teletype equipment may ask you not to "Diddle" while you are talking to them since it may cause their older equipment to make a lot of noise (but do nothing). It should be noted that NO damage can occur should mechanical teletypes receive "Diddles", and it is not considered bad practice to leave it ON unless asked otherwise by the other station in the QSO.

DIGIPEAT ON|OFF

Mode: Packet

Default: ON

Parameters:

ON The MFJ-1278 will digipeat packets if requested.

OFF The MFJ-1278 will not digipeat packets.

When this parameter is ON, any packet received that has your TNC's **callsign** (including SSID) in the digipeat list of its address field will be retransmitted. Each station included in the digipeat list relays the packet in its turn, marking the packet so that it will not accidentally relay it twice (unless so requested), and so that the stations will relay the packet in the correct order. Digipeating takes place concurrently with other MFJ-1278 operations and does not interfere with normal operation of a packet station.

In the spirit of cooperation typical of Amateur operation, you will probably want to set DIGIPEAT ON most of the time. However, you might want to disable digipeating if you're not home, or if your transmit relay makes enough noise to wake you up at night.

The command HID enables automatic transmission of identification packets if your station is acting as a digipeater.

DISCONNE

Mode: Packet

DISCONNE is an immediate command. It will initiate a disconnect request with the currently connected station. A successful disconnect results in the display of:

*** DISCONNECTED

Other commands may be entered while the disconnect is taking place, although connects are disallowed until the disconnect is completed. If the retry count is exceeded while waiting for the other side to acknowledge, the MFJ-1278 moves to the disconnected state. If a disconnect command is entered while the MFJ-1278 is disconnecting, the retry count is immediately set to the maximum number. In either case, the disconnect message is

*** retry count exceeded

*** DISCONNECTED

Disconnect messages are not displayed when the MFJ-1278 is in Transparent Mode.

DISPLAY [class] Mode: All

Parameters:

class Optional parameter-class identifier, one of
the following:

<u>AS</u> YNC	display asynchronous port parameters
<u>CHAR</u> ACTE	display special characters
<u>I</u> D	display ID parameters
<u>L</u> INK	display link parameters
<u>M</u> ONITOR	display monitor parameters
<u>T</u> IMING	display timing parameters
<u>S</u>	display a group of parameters such as memory buffer contents, CW parameters and parameters which affect the printing of graphics to the printer and to the computer screen.
<u>H</u> EALTH	display 25 counters*

*The twenty five counters in the MFJ-1278 are 16 bits wide,
and are ALWAYS initialized to 0000 on power up or "RESTART".

- o- DIGISEN1: Each frame digipeated by the MFJ-1278 causes the counter to increase.
- o- HOVRERR: Increases when HDLC receiver is not serviced rapidly enough and data is lost. This counter should never increment at any supported data rate.
- o- HUNDRERR: Increases when the HDLC transmitter is not serviced rapidly enough and frames are aborted. This counter should never be non-zero at any supported data rate.
- o- RCVDERRR: Increases when Frame reject frames are received from a connected station.
- o- RCVDIFRA: Increases for each reception of an I frame from a connectee.
- o- RCVDREJ: Increases for each reception of an REJ-ect frame from a connectee.
- o- RCVDNR: Counts the number of AX.25 L2 receiver-not-ready frames received since power-up and during connections. The count may be useful in gauging system throughput.
- o- RCVDSARM: Each received SARM frame addressed to the MFJ-1278 causes this counter to be increased by one.
- o- RXABORT: RXABORT is a count of the number of hardware-detected HDLC abort events. A large number of counts is perfectly normal and should not cause concern.
- o- RXCOUNT: Increases when any frame is received with good CRC (or any CRC if HGARBAGE is turned on).
- o- RXFRRORS: Increments each time a received frame is thrown out due to it being too short, suffering overrun(s), or it having a bad CRC. Latter occurs only when CRC checking is enabled (i.e. HGARBAGE is OFF). This counter will often increment in the presence of noise.
- o- RXLENERR: RXLENERR counts the number of too-short frames received. The counts are of diagnostic use only and here again, non-zero counts are not a matter of concern.

- o- RXRESYNC: RXRESYNC is a diagnostic health counter recording the number of receiver resynchronizations handled internally to the MFJ-1278. Non-zero counts indicate the attached radio may be either turned off or squelched. Note that in almost every situation your radio must be have

DISPLAY Mode: AMTOR Default: (command)

To display all of the current AMTOR parameters, type DISPLAY at the "a_cmd:" prompt.

DWAIT n Mode: Packet Default: 33

Parameters:

n 0 - 250, specifying default wait time in 10 ms intervals.

This value is used to avoid collisions with digipeated packets. The MFJ-1278 will wait the default wait time after last hearing data on the channel before it begins its own keyup sequence, unless the MFJ-1278 is waiting to transmit digipeated packets. This value should be agreed on by all members of a local area when digipeaters are used in the area. The best value will be determined by experimentation, but will be a function of the keyup time (TXDELAY) of the digipeater stations.

This feature is intended to help alleviate the drastic reduction of throughput that occurs on a channel when digipeated packets suffer collisions. It is necessary because digipeated packets are not retried by the digipeater, but must be restarted by the originating station. If all stations specify a default wait time, and the right value of n is chosen, the digipeater will capture the frequency every time it has data to send, since digipeated packets are sent without this delay.

The DWAIT timer is defeated (superseded) when the command ACKPRIORITY is ON.

EASIN ON|OFF Mode: AMTOR Default: OFF

EASIN controls whether the MFJ-1278 echos text that you have sent it for transmission at the instant it is sent. Normally the MFJ-1278 is configured to echo as you type, this is the default (OFF) state of this parameter.

Setting EASIN ON is useful for monitoring channel quality. If you type a few characters and they quickly echo, it usually means the link is quite good. On the other hand if it is taking a long time before the characters echo then the link is not that good.

ECHO ON|OFF Mode: AMTOR Default: ON

In the "a_cmd:" amtor command, ECHO sets whether the MFJ-1278 transmits back to you everything that you type. ECHO works independently of EASIN.

ECHO ON|OFF

Mode: All

Default: ON

Parameters:

ON Characters received from the computer or terminal are echoed by the MFJ-1278.

OFF Characters are not echoed.

This command controls local echoing by the MFJ-1278 when it is in Command or Converse Mode. Local echoing is disabled in Transparent Mode.

If you don't see your input on the display, you should set **ECHO ON**. If you see two copies of every character you type, you should set **ECHO OFF**. If you see the characters you type displayed correctly, you have **ECHO** set correctly.

EPSON ON|OFF

Mode: All

Default: ON

This parameter specifies whether there is an EPSON (tm) compatible or C. Itoh 8510-P printer attached to the printer port. If the printer connected to the MFJ-1278 is not an EPSON or C.Itoh 8510-P you should set **EPSON** to OFF.

ERUS ON|OFF Mode: AMTOR Default: ON

AMTOR monitoring is protected to some extent from errors, but not fully. If ERUS is ON, at times when the MFJ-1278 is receiving and detects the reception of errors, the ASCII underscore character (_) is output to the terminal.

Receive errors are likely in mode "L", which is the mode A monitoring mode if you can't hear both sides of the contact very well. Less likely, reception errors can occur while receiving mode B or S. They are extremely unlikely (although still possible) in mode A because this mode is more protected from receive errors.

ESCAPE ON|OFF Mode: Packet Default: OFF

Parameters:

ON The <ESCAPE> character (\$1B) is output as "\$" (\$24).

OFF The <ESCAPE> character is output as <ESCAPE> (\$1B).

This command specifies the character which will be output when an <ESCAPE> character is to be sent to the terminal. The <ESCAPE> translation is disabled in Transparent Mode.

This command is provided because some terminals, and computer programs that emulate such terminals, interpret the <ESCAPE> character as a special command prefix. Such terminals may alter their displays depending on the characters following the <ESCAPE>. If you have such a terminal, you can protect yourself from unexpected text sequences and from other packeteers by setting ESCAPE ON.

See also the MFILTER command, which allows general character stripping (rather than character translation) in monitored packets.

FARNSWOR ON|OFF Mode: CW Default: ON

Many find training for CW tests with a FARNSWORTH method of code generation more valuable because it teaches letter recognition at a speed fast enough to avoid the common learning "plateau". Some people have trouble passing this plateau as they increase their code speed.

When **FARNSWOR** is ON the MFJ-1278 transmits CW characters from keyboard or the Memory Keyer using 15 WPM equivalent letters and elements.

Setting **FARNSWOR** to OFF causes CW text to be sent at normal timing at the selected speed.

FAXEOP ON|OFF Mode: FAX Default: ON

When **FAXEOP** is ON, the MFJ-1278 detects the end-of-picture for received FAX by looking for a long period of idle tone. Setting it OFF disables all FAX end-of-picture detect, and the user must manually terminate reception by returning to command mode.

FAXMODE n n= 1 thru 7 Mode: FAX Default: 3

The FAXMODE command of the MFJ-1278 specifies the FAX format, in terms of speed. FAXMODE (n) and speed are shown in the Table below.

FAXMODE(n)	Speed				Horizontal DENSITY (Dots)
1	60 lines/min.	or	1	line/sec.	600
2	90 "	or	1.5	"	600
3	120 "	or	2	"	900/600
4	240 "	or	4	"	480
5	360 "	or	6	"	720
6	480 "	or	8	"	480
7	180 "	or	3	"	400

FAXMODE is effective only when operating 2 levels FAX format, i.e. when MULTIFAX command is OFF. When MULTIFAX is ON FAXMODE is irrelevant.

FAXNEG ON|OFF Mode: FAX Default: OFF

Setting FAXNEG ON causes the MFJ-1278 to print the white areas of FAX pictures black, and black areas, white.

FAXREV ON|OFF Mode: FAX Default: OFF

When FAXREV is turned ON. The MFJ-1278 will invert all received FAX data including synchronization bars. It is analogous to RXINVERT as used by RTTY/ASCII modes.

FEC

Mode: AMTOR

Default: (command)

FEC immediately causes the MFJ-1278 to start broadcasting with the AMTOR mode B forward error correcting (FEC) protocol.

When FEC is issued the MFJ-1278 keys the transmitter and is immediately ready to accept text to transmit. Type K or CONV to enter the text transmit mode. When you're done transmitting, enter CTL-C and type R to release the transmitter and return the MFJ-1278 to standby/receive.

FLOW ON|OFF

Mode: Packet

Default: ON

Parameters:

ON Type-in flow control is active.

OFF Type-in flow control is disabled.

When type-in flow control is enabled, any character entered from the terminal will halt output to the terminal until: (1) a packet is forced (in Converse Mode); (2) a line is completed (in Command Mode); (3) the packet length is exceeded; or (3) the terminal output buffer fills up. Canceling the current command or packet or typing the redisplay-line character will also cause output to resume. Type-in flow control is not used in Transparent Mode.

Setting FLOW ON will keep received data from interfering with data entry. If you (and the person you are talking to) wait for a packet from the other end before starting to respond, you can set FLOW OFF. Some Bulletin Board programs may work best with FLOW OFF. Some computers with "software UARTs" may be unable to send and receive data at the same time; users of such computers should set FLOW ON.

FRACK n

Mode: Packet

Default: 3

Parameters:

n 1 - 15, specifying frame acknowledgment timeout in 1 second intervals.

After transmitting a packet requiring acknowledgment, the MFJ-1278 will wait for the frame acknowledgment timeout before incrementing the retry counter and sending the frame again. If the packet address includes relay requests, the time between retries will be adjusted to

$$\text{Retry interval} = n * (2 * m + 1)$$

where m is the number of intermediate relay stations.

When a retried packet is sent, a random wait time is added to any other wait times in use. This is to avoid lockups in which two TNCs repeatedly send packets which collide with each other.

FULLDUP ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Full duplex mode is enabled.

OFF Full duplex mode is disabled.

When full duplex mode is disabled, the MFJ-1278 makes use of the Data Carrier Detect signal from the modem to avoid collisions, and acknowledges multiple packets in a single transmission with a single acknowledgment. When full duplex mode is enabled, the MFJ-1278 ignores the DCD signal and acknowledges packets individually. The latter mode is useful for full-duplex radio operation, such as through OSCAR 10. It should not be used unless both your station and the station you are communicating with are full-duplex stations.

You may find full-duplex mode useful for some testing operations, such as analog- or digital-loopback tests.

FULLDUP should be ON during analog and digital loopback tests.

GRAPHLF ON|OFF

Mode: FAX/SSTV

Default: OFF

For FAX and SSTV receive modes, the **GRAPHLF** setting determines whether the MFJ-1278 will issue a line feed (ASCII value 10 decimal) character before the carriage return on every line of graphics.

For most printers, **GRAPHLF** should be set to ON. Set **GRAPHLF** to OFF if you notice spaces in the printed pictures.

HEADERLN ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON The header for a monitored packet is printed on a separate line from the packet text.
- OFF The header and packet text of monitored packets are printed on the same line.

This command affects the display format for monitored packets. If **HEADERLN** is OFF, the address information is displayed with the packet:

KV7D>N2WX: Go ahead and transfer the file.

If **HEADERLN** is ON, the address information is displayed, followed by the packet text on a separate line:

N2WX>KV7D:

Sorry, I'm not quite ready yet.

If you have set **MRPT ON** or enabled **MSTAMP**, you may wish to set **HEADERLN ON**, as the packet header quickly becomes long enough to fill a screen when these functions are active.

HID ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Enables HDLC identification by a digipeater.

OFF Disables HDLC identification.

This command is used to enable or disable the sending of identification packets by the MFJ-1278. If HID is OFF, the MFJ-1278 will never send an identification packet. If HID is ON, the MFJ-1278 will send an identification packet every 9.5 minutes if the station is digipeating packets. The ID command allows the operator to send a final identification packet if the station is being taken off the air.

An identification consists of an unsequenced I frame whose data field is your station identification. The identification packet is addressed to the "CQ" address set by the UNPROTO command. Your station identification is your call-sign as set by MYCALL, with "/R" appended.

ID

Mode: AMTOR

Default: (command)

When issued under the "a_cmd:" amtor command, the ID command causes a keyed modulated CW identification of your station to be sent immediately. The identification sent consists of the letters QRA followed by the call sign entered in CWCALL (see CWCALL)

ID

Mode: Packet

ID is an immediate command. It will send a special identification packet. ID can be used to force a final identifi-

LCALLS call1[,call2...,call8] Mode: Packet Default: ""

Parameters:

call Callsign list. Up to 8 calls, separated by commas.

Each **callsign** may include an optional sub-station ID specified as **-n** immediately following the call. This command works in conjunction with **BUDLIST** and allows selective monitoring of other packet stations. These two commands determine which packets will be displayed when you have set **MONITOR ON**. **BUDLIST** specifies whether the **callsigns** in the list are the ones you want to ignore or, alternatively, are the only ones you want to listen to.

If you want to listen only for packets from a limited list,

you should enter your selected list with **LCALLS** and set **BUDLIST ON**.

If you want to ignore packets from a limited list, you should list the **callsigns** to ignore in **LCALLS** and set **BUDLIST OFF**.

"%" and "&" may now be used to clear the **LCALLS** list.

LCSTREAM ON|OFF Mode: Packet Default: ON

Parameters:

ON The MFJ-1278 will translate the character immediately following the **STREAMSWITCH** character to upper case before processing it.

OFF The MFJ-1278 will process the character immediately following the **STREAMSWITCH** character as it is entered.

When operating multi-connect, the user must enter a stream identifier (default A through J) after the **STREAMSWITCH** character (default {) to select a new logical stream to send data. Normally, the stream identifier must be in upper case, or an error message will result.

When **LCSTREAM** is ON, the character immediately following the streamswitch character is converted to upper case before being acted upon. Thus, the case (upper or lower) becomes insignificant. Use of **LCSTREAM** is useful if you are typing in lower case and don't want to be bothered with remembering to switch to upper case when changing streams.

LCOK ON|OFF

Mode: Packet

Default: ON

Parameters:

ON The MFJ-1278 will send lower case characters to the computer or terminal.

OFF The MFJ-1278 will translate lower case characters to upper case.

If LCOK is OFF, lower case characters will be translated to upper case before being output to the terminal. This case translation is disabled in Transparent Mode. Input characters and echoes are not case translated.

If your computer or terminal does not accept lower case characters it may react badly if the MFJ-1278 sends such characters to it. This command allows you to translate all lower case characters received in packets, as well as messages from the MFJ-1278, to upper case.

Since echoes of the characters you type are not translated to upper case, you can use this command to make your display easier to read when you are conversing in connected mode. If you and the other station's operator set LCOK OFF, you can each type your own messages in lower case and see incoming packets displayed in upper case. It will then be easy to distinguish incoming and outgoing lines.

LFADD ON|OFF

Mode: ASCII/Packet

Default: OFF

When **LFADD** is ON and the ASCII or Packet mode is selected, 1278 will append an ASCII line feed character, \$0A, to the transmission immediately after a carriage return is sent.

LFADD should usually be switched OFF as the vast majority of TNCs (including the MFJ-1278) are configured to automatically go to a new line whenever a carriage return is printed.

Also see: AUTOLF parameter

LFADDALT ON|OFF

Mode: RTTY

Default: ON

LFADDALT is very similar to the **LFADD** command above. However this command applies ONLY to Baudot RTTY mode.

Baudot RTTY operation almost always requires that a line feed be sent along with a carriage return. When **LFADDALT** is ON the MFJ-1278 will automatically insert the Baudot line feed whenever the user sends a carriage return.

There is one case where line feeds should not be automatically transmitted, that is when sending complex radio teletype pictures.

Also see: AUTOLF parameter

LFIGNORE ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON MFJ-1278 will ignore <LF> characters.

OFF MFJ-1278 will respond to <LF> characters.

This command controls whether MFJ-1278 responds to ASCII Line Feed (<LF> \$0A) characters or ignores them in command and converse modes.

When turned on, line feeds are totally ignored except in transparent mode.

LISTEN

Mode: AMTOR

Default: (command)

LISTEN is used to begin monitoring someone else's mode A connection. You'll need to enter **LISTEN** to tell the MFJ-1278 to start synchronizing to the desired signal.

LISTENing to mode A connections can be irritating if conditions are poor because there is no error correction afforded to stations which are not active participants in the QSO. (also see ERUS)

MAILBOX ON|OFF

Mode: Packet

Default: OFF

When MAILBOX command is set to ON the mailbox functions are active. Note that the MAILBOX is a single-user device; therefore, if you wish to use the MAILBOX it is necessary for you to set USER 1 and select stream A. Note that these are the default settings and selections, respectively.

If you wish to have messages time and date stamped, make sure that DAYTIME is set with the correct time or else each message entered without DAYTIME will not be shown.

The mailbox has the following basic commands:

- o K -- Kill all messages addressed to you.
- o K ## -- Kill the message in slot nn. Remote users may only kill message addressed to them or originated by them. the local SYSOP, however, can kill all messages.
- o L -- List the slot number, originator, destination, and subject field of currently used slots.
- o R -- Read all of the messages addressed to you.
- o R ## -- Read the message in slot nn.
- o S call -- Send a message to the callsign. "Call" must be a callsign valid under the same format as the MYCALL, CONNECT and other callsign commands.
- o SP call -- Send a personal message to the callsign. This is a private message which can only be read by the originating station, the station addressed and the mailbox SYSOP.

MAILED ON|OFF

Mode: Packet

Default: ON

When MAILED is ON, the MFJ-1278's STA LED will flash on and off while not connected to indicate the presence of mail in the MFJ-1278's mailbox. The STA LED reverts to its normal function, lit when unacknowledged packets are pending, if the MFJ-1278 is in a CONNECTED state, or if MAILED is OFF.

MALL ON|OFF

Mode: Packet

Default: ON

Parameters:

- | | |
|-----|---|
| ON | Monitored packets include both "connected" packets and "unconnected" packets. |
| OFF | Monitored packets include only "unconnected" packets. |

This command determines the class of packets which are monitored. If MALL is OFF, only otherwise eligible packets (as determined by the BUDLIST and LCALLS commands) sent by other TNCs in the unconnected mode are displayed. This is the normal manner of operation when this MFJ-1278 is being used to talk to a group of TNCs all of which are unconnected.

If MALL is ON, all otherwise eligible frames are displayed, including those sent between two other connected TNCs. This mode may be enabled for diagnostic purposes or for "reading the mail."

MATCH ON|OFF Mode: AMTOR Default: ON

MATCH is used for selectively monitoring portions of mode B FEC transmissions. If MATCH is ON, the MFJ-1278 will not start printing a mode B signal until the string set in MBEGIN is matched. Likewise, the search for the terminating string in the MEND parameter begins when the MFJ-1278 starts printing. When this ending string is matched the TNC stops printing and goes back to waiting until the next MBEGIN sequence is received.

MAXFRAME n Mode: Packet Default: 4

Parameters:

n 1 - 7, signifying a number of packets.

MAXFRAME sets an upper limit on the number of unacknowledged packets which the MFJ-1278 can have outstanding at any one time. This is also the maximum number of contiguous packets which can be sent during any given transmission. If some but not all of the outstanding packets are acknowledged, a smaller number may be transmitted the next time, or new frames may be included in the retransmission, so that the total unacknowledged does not exceed n.

If you perform file transfers, you should experiment with MAXFRAME and PACLEN. If the link is good, there is an optimum relationship between the parameters set by these commands so that the maximum number of characters outstanding does not exceed the packet receive buffer space of the MFJ-1278 receiving the data.

MBEGIN cccc Mode: AMTOR Default: <>>

The **MBEGIN** parameter, which can be up to 15 characters long, is effective when MATCH is ON and a mode B signal is being received. When MATCH is ON, the MFJ-1278 will not print a mode B transmission until the string in MBEGIN is matched.

MEND cccc Mode: AMTOR Default: nnnn

The **MEND** parameter, which may also be up to 15 characters long, is effective when MATCH is ON and a mode B signal has set off the matching function. The MFJ-1278 will print all of a mode B transmission received after text matching MBegin is received until text matching the MEND string is received, or the transmission physically ends.

MCOM ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Connect, disconnect, UA, and DM frames are monitored.

OFF Only information frames are monitored.

This command enables monitoring of connect and disconnect frames when MONITOR is ON.

When MCOM is OFF, only I frames (packets containing user information) will be displayed. When MCOM is ON four protocol packets will also be displayed. Connect, disconnect, UA, and DM packets that are monitored are indicated by <C>, <D>, <UA>, and <DM>, respectively. As with other monitor commands, the stations monitored are determined by BUDLIST and LCALLS.

Path for SABM received while in link-setup state is not checked.

MCON ON|OFF

Mode: Packet

Default: ON

Parameters:

ON Monitor mode remains active when MFJ-1278 is connected.

OFF Monitor mode is off while the MFJ-1278 is connected.

If MCON is ON, the MONITOR command will enable monitoring while your MFJ-1278 is connected to another TNC. If MCON is OFF, the display of monitored packets is suspended when a connect occurs, and is resumed when the TNC is disconnected.

If you want to see all packets displayed when you are not connected but have such display suppressed when you connect to another station, you should set MCON OFF.

MFILTER n1,[n2],[n3],[n4] Mode: Packet Default: none

Parameters:

n 0 - \$7F, specifying an ASCII character code.
Up to 4 characters may be specified.

This command allows you to specify characters to be "filtered," or eliminated from monitored packets. The parameters n1, n2, etc., are the ASCII codes for the characters you want to filter. You can enter the code in either hex or decimal.

For example, if a <CTRL-L> character causes your screen to be cleared, and you don't want this to happen, you can set MFILTER 12. If you also want to eliminate <CTRL-Z> characters, which some computers interpret as end-of-file markers, you can set MFILTER 12,26.

MHCLEAR Mode: Packet

MHCLEAR is an immediate command. It causes the list of stations heard to be cleared. You can use this command in conjunction with MHEARD to keep track of the stations on the air over a given period of time, such as an evening or a week. Clear the list of stations heard when you first begin to monitor the packet activity.

MHEARD

Mode: Packet

MHEARD is an immediate command. It causes the MFJ-1278 to display the list of stations that have been heard since the last time the command MHCLEAR was given. Stations that are heard through digipeaters are marked with a * in the heard log. If you clear the list of stations heard at the beginning of a session, you can use this command to easily keep track of the stations that are active during that period. The maximum number of heard stations that can be logged is 18. If more stations are heard, earlier entries are discarded. Logging of stations heard is disabled when PASSALL is ON.

If the DAYTIME command has been used to set the date and

examn.

MNonax25 ON|OFF Mode: Packet Default: OFF

MNonax25 is defaulted to OFF. When MNonax25 is OFF the display of non-AX.25 packets is inhibited. MFJ-1278 will display only AX.25 packets. Setting MNonax25 ON will cause MFJ-1278 to also monitor non-AX.25 packets, for example those associated with TCP/IP and NET/ROM or THENET links. Display of non-AX.25 packets may not be understandable to the user.

MONITOR ON|OFF Mode: Packet Default: ON

Parameters:

ON Monitoring of packet activity is enabled.

OFF Monitoring of packet activity is disabled.

If MONITOR is ON and the MFJ-1278 is not in Transparent Mode, packets not addressed to your MFJ-1278 may be displayed. The addresses in the packet are displayed along with the data portion of the packet, e.g.:

N2WX>W5FD-3: I'm ready to transfer the file now.

The calls are separated by a ">" and the sub-station ID field (SSID) is displayed if it is other than 0. The MALL, BUDLIST, and LCALLS commands determine which packets are to be monitored. The MCON command controls the action of monitor mode when the MFJ-1278 is connected. All monitor functions are disabled in Transparent Mode.

The format of the monitor display is controlled by HEADERLN. If you want to see the station addresses on a separate line from the text, you can set HEADERLN ON. MRPT enables monitoring of the digipeater route as well as source and destination addresses for each packet. MSTAMP includes a time stamp with the addresses if DAYTIME has been set.

MRPT ON|OFF

Mode: Packet

Default: ON

Parameters:

- ON Display the stations in the digipeat path for monitored packets.
- OFF Display only the source and destination stations for monitored packets.

This command affects the way monitored packets are displayed. If MRPT is OFF, only the originating station and the destination are displayed for monitored packets. If MRPT is ON, the entire digipeat list is displayed for monitored packets, and stations that have already relayed the packet are indicated with an asterisk.

For example,

WB9FLW>AD7I,K9NG*,N2WX-7:Hi Paul.

This packet, sent from WB9FLW to AD7I, has been relayed by K9NG but not by N2WX-7. With MRPT OFF, the same packet would be displayed as

WB9FLW>AD7I:Hi Paul.

Setting MRPT ON increases the length of the address display, and you may wish to set HEADERLN ON as well to display this information on a separate line.

MSPEED n n=5 to 99 Mode: CW/MCW Default: 20

The value of the MSPEED setting controls the speed of CW sent by the MFJ-1278. Values below 5 WPM automatically cause a 5 WPM speed to be selected.

When MSPEED is less than 15 WPM, and FARNswor is ON, the MFJ-1278 uses the "Farnsworth" method of transmission, where the element (dot and dash) times are equivalent to 15 WPM but the character spacing of the slower speed is used.

MSTAMP ON|OFF Mode: Packet Default: OFF

Parameters:

ON Monitored frames are time stamped.

OFF Monitored frames are not time stamped.

This command enables time stamping of monitored packets. The date and time information is then available for use for automatic logging of packet activity or other computer applications. The date and time are set initially by the DAYTIME command, and the date format is determined by the DAYUSA command.

Setting MSTAMP ON increases the length of the address display, and you may wish to set HEADERLN ON as well to display this information on a separate line.

MULTIFAX ON|OFF

Mode: FAX

Default: OFF

Parameters:

ON MFJ-1278 is set to transmit and receive FAX picture in raw data format.

OFF MFJ-1278 is set to transmit and receive FAX picture in 2 levels format.

When **MULTIFAX** is turned ON, MFJ-1278 is set to transmit and receive multi-level FAX pictures. FAX Raw data format is sent to the RS-232 port during receiving and raw data is also expected from the terminal program for MFJ-1278 to transmit multi-level FAX picture. Also see **PIXTONES**. Multi-level FAX printing to the MFJ-1278 printer port or printing to the computer screen is not supported by the MFJ-1278 firmware. Special terminal program must be used for this operation. for those who wish to write terminal program to support **MULTIFAX**, more information is provided in the "FAX Operation" section of this manual.

When **MULTIFAX** is OFF, the default setting, MFJ-1278 will operate in standard 2 levels FAX mode. FAX data format is sent to the MFJ-1278 printer port when **PRINTGRA** is OFF. IF **PRINTGRA** is ON MFJ-1278 will sent 2 levels data the the RS-232 port.

Note that when **MULTIFAX** is turned ON, **PRINTGRA** command will be ignored. This means that under FAX mode with **MULTIFAX** turned ON, MFJ-1278 will start to send raw data to the terminal regardless of the setting of **PRINTGRA** command.

MYCALL call[-n] Mode: Packet Default: NOCALL-0

Parameters:

call **Callsign** of your MFJ-1278.

n 0 - 15, an optionally specified sub-station
 ID (SSID).

This command tells the MFJ-1278 what its **callsign** is. This **callsign** will be placed in the FROM address field for all packets originated by your MFJ-1278. It will accept frames with this **callsign** in the TO field and relay frames with this **callsign** in the digipeat field. MYCALL will also be used for identification packets (see HID and ID).

The default **callsign** must be changed for proper operation of the protocols. There should never be more than one station with the same **callsign** (including SSID) on the air at once. The SSID can be used to distinguish two stations with the same Amateur call. The SSID will be 0 unless explicitly set to another value.

MYALIAS call[-n] Mode: Packet Default: <blank>

Parameters:

call Alternate identity of your MFJ-1278.
n 0-15, an optionally specified sub-station ID (SSID).

This command specifies an alternate callsign (in addition to the callsign specified in MYCALL) for use as a digipeater only.

In some areas, wide coverage digipeaters operators have changed the callsign of their machine to a shorter and (usually) easier to remember identifier. International Civil Aviation Organization (ICAO) airport identifiers, sometimes combined with telephone area codes, have been used.

Use of this command permits HID to identify normally with the MYCALL-specified callsign yet permit an alternate (alias) repeat-only "callsign."

MYSELCAL "ssss" Mode: AMTOR Default: blank

MYSELCAL tells the MFJ-1278 what SELCAL you're station should respond to. See section "Mode A: Setup" for information on selecting a SELCAL for your station, based on your amateur callsign.

Note that your MFJ-1278 will not respond to mode A "ARQ" calls unless MYSELCAL is set up.

NAVTEX

Mode: Navtex

Default:OFF

NAVTEX is a immediate command. NAVTEX must be issued under the "a_cmd:" amtor command prompt. Under the "a_cmd:" command prompt, type NAVTEX to put your MFJ-1278 ready to receive NAVTEX signals on 518 KHz. Tune your radio to 518 KHz.

To receive NAVTEX, MFJ-1278 must first receive the ZCZC start message, followed by the four character preamble described above. If this is not received intact, the message will not be received. At the end of the message, NNNN will be received and the MFJ-1278 will stop receiving the Navtex message.

MFJ-1278 will remember the last 200 four character preambles received with less than 1/8 of its characters received in error. MFJ-1278 will not reprint any of these messages when they are re-transmitted from that Navtex station. If you exit the "a-cmd:" command prompt, the preamble memory is erased.

Emergency messages are numbered 00 and will always be printed regardless of whether they have already been received.

NAVSTN

Mode: Navtex

Default: ALL

To prevent your MFJ-1278 from receiving certain Navtex stations, just type "NAVSTN XXXXXXXXXXXX" where each X is the identifying letter of the station you want to receive. Your list of stations to receive may contain up to 26 letters, each representing a station.

For example, if you want to receive only stations A, C and P, then you type "NAVSTN ACP". Only signals from these three stations will be received by your MFJ-1278.

If you want to prevent certain stations from being received, leave them off the list. Then, those stations will not be received while others within the receiving area will.

You may also type "NAVSTN ALL" (the Default value) to receive all Navtex stations.

NAVMSG

Mode: Navtex

Default: ALL

NAVMSG works like the NAVSTN command with the ALL parameter used to exclude all, or to specify the type of messages to receive.

The types of Navtex messages currently are:

- A: Navigational warnings
- B: Storm Warnings
- C: Reports of Ice
- D: Search/Rescue Information
- E: Weather forecasts
- F: Pilot Service Messages
- G: DECCA System
- H: LORAN-C
- I: Omega Systems
- J: SATNAV Systems

X thru-Z are not in use at this time. They are reserved for future use.

NEWMODE ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON Switching to data transfer mode occurs at the time of the CONNECT command and return to command mode is automatic at the time of disconnection.
- OFF Switching to data transfer mode occurs at time of connection and no return to command mode occurs at disconnection.

The **NEWMODE** command may be used to select the way the MFJ-1278 behaves when connections are made and broken.

If **NEWMODE** is **OFF**, the MFJ-1278 will remain in Command Mode after you issue a **CONNECT** command until a connection is actually established. When the connection is established, the MFJ-1278 will enter Converse Mode or Transparent Mode, depending on the setting of **CONMODE**. When the connection is terminated, the MFJ-1278 remains in Converse or Transparent Mode unless you have forced it to return to Command Mode. This is the same as the behavior of TNC 1 (running version 3.x software) under these conditions.

If **NEWMODE** is **ON**, the MFJ-1278 will enter Converse Mode as

NOMODE ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON The MFJ-1278 will only switch modes (command, converse or transparent) upon explicit command.
- OFF The MFJ-1278 will switch modes in accordance with the setting of NEWMODE.

When NOMODE is ON, the MFJ-1278 will never change between CONVERSE or TRANSPARENT mode to COMMAND mode (or vice-versa) on its own. Only user commands (CONV, TRANS, or ^C) may change the type in mode.

If NOMODE is OFF, then automatic mode switching is handled according to the setting of the NEWMODE command.

NUCR ON|OFF

Mode: Packet

Default: OFF

Parameters:

- ON <NULL> characters are sent to the terminal following <CR> characters.
- OFF <NULL> characters are not sent to the terminal following <CR> characters.

This command causes transmission of <NULL> characters (ASCII code \$00), producing an effective delay following any <CR> sent to the terminal. The number of <NULL> characters is determined by the command NULLS. This delay is required by

~~some hardware terminals. You need to set NUCR ON if you~~

NULF ON|OFF Mode: Packet Default: OFF

Parameters:

ON <NULL> characters are sent to the terminal
 following <LF> characters.

OFF <NULL> characters are not sent to the terminal
 following <LF> characters.

This command causes transmission of <NULL> characters (ASCII code \$00), producing an effective delay following any <LF> sent to the terminal. The number of <NULL> characters is determined by the command NULLS. This delay is required by some display terminals. You need to set NULF ON if your terminal sometimes misses characters at the beginning of the line.

NULLS n Mode: Packet Default: 0

Parameters:

n 0 - 30, specifying the number of <NULL> char-

OMLC ON|OFF Mode: AMTOR Default: OFF

Output map to lower case (OMLC) when ON instructs the MFJ-1278 to convert all letter characters, except those echoed, to their lower case equivalent.

PACLEN n Mode: Packet Default: 128

Parameters:

n 0 - 255, specifying the maximum length of the data portion of a packet. The value 0 is equivalent to 256.

The MFJ-1278 will automatically transmit a packet when the number of input bytes for a packet reaches n. This value is used in both Converse and Transparent Modes.

If you perform file transfers, you should experiment with both MAXFRAME and PACLEN. If the link is good, there is an optimum relationship between the parameters set by these commands so that the maximum number of characters outstanding does not exceed the packet receive buffer space of the MFJ-1278 receiving the data.

NOTE: Although there is no requirement for two TNCs exchanging data to have the same PACLEN value, allowing more than 128 characters of data in a packet may be incompatible with some varieties of TNCs.

PACTIME EVERY|AFTER n Mode: Packet Default: AFTER 10

Parameters:

n	0 - 250, specifying 100 ms intervals.
EVERY	Packet timeout occurs <u>every</u> n*100 milliseconds.
AFTER	Packet timeout occurs when n*100 milliseconds elapse with no input from the computer or terminal.

This parameter is always used in Transparent Mode, and will also be used in Converse Mode if CPACTIME is ON. When EVERY is specified, input bytes are packaged and queued for transmission every n*100 ms. When AFTER is specified, bytes are packaged when input from the terminal stops for n*100 ms. In no case will a zero length packet be produced, and the timer is not started until the first byte is entered. A value of 0 for n is allowed, and causes packets to be generated with no wait time.

PARITY n

Mode: All

Default: 0 (none)

Parameters:

n 0 - 3, selecting a parity option from the
 table below.

This command sets the parity mode for terminal or computer
data transfer according to the following table:

n	Parity

0	no parity
1	odd parity
2	no parity
3	even parity

The parity bit, if present, is automatically stripped on
input and not checked in Command Mode and Converse Mode. In
Transparent Mode, all eight bits, including parity if any,
are transmitted in packets. If "no parity" is set and AWLEN
is 7, the eighth bit will be set to 0 in Transparent Mode.

PASS n Mode: Packet Default: \$16 <CTRL-V>

Parameter:

n 0 - \$7F, specifying an ASCII character code.

This command selects the ASCII character used for the "pass" input editing command. The parameter n is the ASCII code for the character you want to type in order to include the following character in a packet or text string. You can enter the code in either hex or decimal.

You can use this character to send any character in packets, even though that character may have some special function. For example, suppose you have set COMMAND 3, specifying that <CTRL-C> is your Command Mode entry character. If you use a Bulletin Board program that requires a <CTRL-C> to escape from some operation, you will type

<CTRL-V> <CTRL-C>

to insert a <CTRL-C> character in your packet. Of course, if you do this frequently you would be better off to change your Command Mode entry character.

A common use for the pass character is to allow <CR> to be included in the BTEXT and CTEXT messages. Similarly, you can include <CR> in text when you are in Converse Mode, to send multi-line packets. (The default send-packet character is <CR>.)

PASSALL ON|OFF Mode: Packet Default: OFF

Parameters:

ON MFJ-1278 will accept packets with invalid CRCs.

OFF MFJ-1278 will only accept packets with valid CRCs.

This command causes the MFJ-1278 to display packets received with invalid CRC fields. Packets are accepted for display despite CRC errors if they consist of an even multiple of 8 bits and up to 339 bytes. The MFJ-1278 will attempt to decode the address field and display the call sign(s) in the standard monitor format, followed by the text of the packet.

This mode is not normally enabled, since rejection of any packet with an invalid CRC field is what insures that received packet data is error-free. This mode might be enabled for testing a marginal RF link or during operation under other unusual circumstances.

If you set PASSALL ON and monitor a moderately noisy channel you will periodically see "packets" displayed in this mode, since there is no basis for distinguishing actual packets received with errors from random noise.

Logging of stations heard (for display by MHEARD) is disabled whenever PASSALL is ON, since the call signs detected may be incorrect.

PIXTONES n Mode: FAX/SSIV Default: (see below)

n = aaa,bbb,ccc,ddd

PIXTONES is arranged in the following format:

PIXTONES aaa,bbb,ccc,ddd,eee,fff,ggg,hhh

where,

aaa is the value which determines the "white" area of the transmitted picture.

hhh is the value which determines the "black" area of the transmitted picture.

The values between aaa and hhh define the gray areas of the transmitted pictures.

The default PIXTONES values are:

PIXTONES \$B9,\$BA,\$B8,\$98,\$B6,\$B0,\$90,\$A0

Note that in 4 gray-levels of SSIV or FAX transmission (command BLEVELS is OFF), MFJ-1278 will automatically select only four of the PIXTONES values you have chosen. PIXTONES does not affect 2 levels FAX transmitting.

PIXTONES determine the number of gray levels on a picture which the MFJ-1278 is capable of transmitting. Current PIXTONES command is set to 8 levels of gray. Each level of gray is represented by a tone produced by the MFJ-1278 multi-gray level modem.

To use PIXTONES the terminal program which support your computer must be able to support the raw data format required by the MFJ-1278. See Chapter 4 in this manual under "Multi-level FAX/SSIV Transmitting" for more detail about the raw data format.

The 16 tones which can be produced by the MFJ-1278 FAX/SSIV modem (in Hz) are:

1500, 1550, 1600, 1650, 1700, 1750, 1800, 1850, 1900, 1950, 2000, 2050, 2100, 2150, 2200, and 2250.

PIXTONES values are in HEX. The higher the tone the lighter shade of gray. If the picture transmitted does not seem to have the right contrast, try and reset the PIXTONES values.

The HEX values which represent the PIXTONES for the pictures to be transmitted are listed in Table below:

PIXTONES Values (HEX)	FAX/SSTV Transmit Tones (Hz)	
sync (not selectable)	1500	
\$00	1550	White
\$A0	1600	^
\$90	1650	^
\$80	1700	^
\$88	1750	^
\$A9	1800	Light Gray
\$98	1850	^
\$B8	1900	^
\$EC	1950	^
\$BA	2000	^
\$BE	2050	Dark Gray
\$B9	2100	^
\$BD	2150	^
\$BB	2200	^
\$BF	2250	Black

PKTPIX ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON MFJ-1278 sends packet data to the printer port

OFF MFJ-1278 sends packet data to the RS-232 port

The PKTPIX command provides a method for the MFJ-1278 to print packet pictures and other graphics-format data transmitted by another station in the VHF packet mode. When PKTPIX is turned ON, the MFJ-1278 becomes ready to print graphics data.

Packet pictures data transmitted from the connecting packet station are received and data is sent directly to the printer attached to the MFJ-1278, without any intervening modification. Therefore, all data MUST use the same printer control codes that your printer uses. Typically EPSON

PRINTGRA ON|OFF Mode: FAX/SSTV Default: ON

For FAX and SSTV modes, the setting of PRINTGRA determines what the MFJ-1278 will do with demodulated graphics. In multi-level FAX mode when MULTIFAX command is turned ON, the setting PRINTGRA (ON or OFF) will not be useful.

Under 2 level FAX/SSTV format, when PRINTGRA is ON, the MFJ-1278 expects and prints to the Epson graphics printer attached to the printer port. When OFF, graphics are sent to the user's terminal in format:

LF, CR, ESC x x, ESC x x x , <<nnn characters of graphics>>

The FAX/SSTV frame sent to the user's terminal contains carriage control information, graphics setup information and "nnn" columns of 6-row high dot graphics.

Special note: in order to allow the FAX/SSTV frames to pass through without special handling, each character in the frame is biased upward with the value 30Hex, so only characters of ASCII value 30H through 7FH are sent to the terminal.

A few side effects of the special handling:

1. FAX/SSTV frames and pictures may be transmitted in PACKET or ASCII or logged to disk without concern for binary transfers

2. The "x" values in the FAX/SSTV header are not useful for determining the format of the FAX/SSTV picture (since 2
bits of the 8 bit length are lost). This is not serious

PRINTER ON|OFF Mode: All Default: OFF

PRINTER turns the parallel printer port ON and OFF.

PRINTTES Mode: ALL Default: off

PRINTTES is a command used to test the printer connected to the parallel port of the MFJ-1278. When PRINTTES is executed from command mode, the MFJ-1278 will send 223 characters to the printer, starting at ASCII SPACE (value 32 decimal) and ending with the value 255 decimal which is not an ASCII character but may be a graphics character. This test does NOT format with any carriage return/line feed sequences, therefore the printer attached MUST be configured for "Auto Newline" or "Line Wrap ON" in order to print all the characters.

QRT

Mode: AMTOR

Default: (command)

QRT is used to:

RADIO n Mode: All Default: 1

Parameters:

n 1 - 2, Specifying the radio port to be used.

RADIO command allows user to select the radio ports of the MFJ-1278. From command mode, typing RADIO 1 will cause the MFJ-1278 to select radio port 1 as the active radio port. Typing Radio 2 will cause the MFJ-1278 to select radio port 2 as the active radio port. When initially powered up, the MFJ-1278 defaults to radio port it was set to when last powered down.

RANDOMCW ON|OFF Mode: CW Default: OFF

Pseudo random CW is sent when in CW mode and RANDOMCW is turned ON. To terminate sending random CW, type "CTL C" and

RECONNECT call1 [VIA call2[,call3...,call9]] Mode: Packet

Parameters:

call1 **Callsign** of TNC to be reconnected to.

call2 Optional **callsign(s)** of TNC(s) to be digipeated through. As many as eight digipeat addresses can be specified.

RECONNECT is an immediate command. It may be used to change the path through which you are currently connected to a station. It may only be used when your MFJ-1278 is connected on the current stream to the station you wish to **RECONNECT** to.

Integrity of frames in flight between your station and the **RECONNECTed** station at the time of **RECONNECT** is not assured.

RESTART

Mode: All

RESTART is an immediate command. It re-initializes the MFJ-1278 using the defaults stored in bbRAM. The effect of this command is the same as turning the MFJ-1278 OFF then ON again.

RESTART does not cause a reset of the parameters in bbRAM. See also the **RESET** command.

REDISPLA n Mode: All Default: \$12 <CTRL-R>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command is used to change the redisplay-line input editing character. The parameter n is the ASCII code for the character you want to type in order to redisplay the current input line. You can enter the code in either hex or decimal.

You can type this character to cause the MFJ-1278 to retype a line you have begun. When you type the redisplay-line character, the following things happen: First, type-in flow control is temporarily released (if it was enabled). This displays any incoming packets that are pending. Then a <BACKSLASH> character is typed, and the line you have begun is retyped on the next line. If you have deleted and re-typed any characters, only the final form of the line will be shown. You are now ready to continue typing where you left off.

You can use the redisplay-line character to see a "clean" copy of your input if you are using a printing terminal and you have deleted characters. If you have set **BKONDEL OFF**, deletions are designated with <BACKSLASH> characters, rather than by trying to correct the input line display. The redisplayed line will show the corrected text.

You can also use this character if you are typing a message in Converse Mode and a packet comes in. You can see the incoming message before you send your packet, without canceling your input.

RESET

Mode: All

This is an immediate command. It resets all parameters to their default settings and re-initializes the MFJ-1278.

WARNING: All parameter customizing and monitor lists are lost.

If you want to re-initialize the MFJ-1278 using the parameter values in battery backed-up RAM, you should turn the MFJ-1278 off then on again rather than using this command.

RESPTIME n

Mode: Packet

Default: 5

Parameters:

n 0 - 250, specifying 100 ms intervals.

This command sets a minimum delay that is imposed on acknowledgment packets. This delay may run concurrently with default wait set by DWAIT and any random wait in effect.

This delay can be used to increase throughput during operations such as file transfer when the sending TNC usually sends the maximum number of full-length packets. Occasionally, the sending TNC may not have a packet ready in time to prevent transmission from being stopped temporarily, with the result that the acknowledgment of earlier packets collides with the final packet of the series. If the receiving TNC sets RESPTIME to 10, say, these collisions will be avoided.

RESTORE

Mode: AMTOR

Default: (command)

RESTORE returns the MFJ-1278 AMTOR code converter to "LIRS" case, and it flushes the transmit buffer. For an explanation on "LIRS" and "FIGS", see any text describing the Murray / Baudot code.

RETRY n

Mode: Packet

Default: 10

Parameter:

n 0 - 15, specifying the maximum number of packet retries.

The protocol allows for retries, i.e., retransmission of frames that are not acknowledged. Frames are re-transmitted n times before the operation is aborted. The time between retries is specified by the command FRACK. A value of 0 for n specifies an infinite number of retries. If the number of retries is exceeded, the MFJ-1278 goes to the disconnected state (with an informative message if not in Transparent Mode). See also the FRACK command.

RFE ON|OFF Mode: AMTOR Default: OFF

RFE is the Retry ForEver parameter. When ON a mode A call will continue until successful or a "QRT" or "R" command is issued.

RINV ON|OFF Mode: AMTOR Default: OFF

RINV controls whether the incoming received signal is inverted before detection/processing. It is similar to RXINVERT in RTTY/ASCII mode.

RXBLOCK ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON The MFJ-1278 will send data to the terminal
in RXBLOCK format.

OFF The MFJ-1278 will send data to the terminal
in standard format.

RXBLOCK is designed for automated operations, such as packet bulletin board stations. It is intended to help such systems discriminate between data received from the connected station and MFJ-1278-generated messages.

Correct operation of RXBLOCK is dependent on the AWLEN parameter getting set to 8 (bits) since the character FF hex marks the beginning of a received data unit header.

When RXBLOCK is on, data from other stations will be sent from the MFJ-1278 in the following format:

```

-----
| $FF | LO | L1 | PID |          DATA          |
-----
( prefix )( length ) ( pid ) (          data          )

```

The fields above are defined as follows:

```

prefix  $FF ::= A character with all 8 bits set
length  LO  ::= The high order length of the data,
                length, and pid fields logically ORed
                with the value $FO
                L1 ::= The low order length of the data,
                length, and pid fields
pid      PID ::= The Protocol IDentifier byte received
                for the following data field
data     DATA ::= [Optional], variable length data

```

For best operation it is suggested that parameters like AUTOLF, MFILTER etc. be set OFF in order to prevent uncertainties in the size of the data field.

RXCAL

Mode: All

RXCAL is an immediate command. When invoked, the MFJ-1278 generates test signals (based on CALSET -- see below) that are used by the internal tuning software to align the demodulator components.

To use the RXCAL feature,

- 1) Align the modulator components as described in the owners manual.
- 2) Use the MODE command to select the demodulator to be tuned. Make sure JMP8, JMP7 and JMP 4 are installed.

- 3) Compute:

$$n = \frac{9600}{\text{bit-rate}}$$

Where "bit-rate" is the same as 1/2 the baud rate in packet modes and the baud rate in all other modes. See CALSET Adjustment & Location Map for "n" value.

- 4) Type the command "CALSET n". Use the 'n' from step 3
- 5) Type the RXCAL command.

- 7) Type the appropriate triplet (P70 P113 P114 or P115)

CALSET Adjustment & Location Map

This is a map of the physical locations of the adjustment

RXINVERT ON|OFF Mode: RTTY/ASCII Default: OFF

Setting RXINVERT ON causes the MFJ-1278 to change its decoding of Baudot RTTY and ASCII signals from the standard high tone used for MARK to the inverted low tone used for MARK.

At times, stations you work may inadvertently be in the wrong sideband mode. If he is printing you but you're not printing him, try turning this ON.

SCREENLN n Mode: All Default: 80

Parameters:

This value is used to properly format terminal output. A <CR> <LF> sequence is sent to the terminal at the end of a line in Command and Converse Modes when n characters have been printed. A value of zero inhibits this action.

SELCALL ssss Mode: AMTOR Default: (command)

The SELCALL command initiates a mode L "SELCALL" broadcast. "ssss" is the four character SELCAL address the broadcast is being sent too.

When SELCALL is issued the MFJ-1278 keys the transmitter and is immediately ready to accept text to transmit. Type K or CONV to enter the text transmit mode. When you're done transmitting, enter CTL-C and type R to release the transmitter and return the MFJ-1278 to standby / receive.

Also see SRXALL

SENDPAC n Mode: Packet Default: \$OD <CR>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command selects the character that will force a packet to be sent in Converse Mode. The parameter n is the ASCII code for the character you want to type in order to force your input to be packetized and queued for transmission. You can enter the code in either hex or decimal.

For ordinary conversation, you will probably set SENDPAC \$OD and CR ON. This causes packets to be set at natural intervals, and causes the <CR> to be included in the packet.

If you have set CPACTIME ON, you will probably set SENDPAC to some value not ordinarily used (say, <CTRL-A>), and set CR OFF. This will allow you to force packets to be sent, but will not result in extra <CR> characters being transmitted in the text.

SERIALNO n n=0-65535

Mode: CW

Default: 0

SERIALNO is useful as a contest QSO number counter. When transmitting a buffer, the MFJ-1278 scans the buffer text to see if there are any pound sign "#" characters and if it encounters any then the current value of the SERIALNO counter inserted in the buffer text being sent. After this value is loaded, SERIALNO is incremented by one until it reaches 65535, where it rolls over to zero.

If for some reason the serial number must be changed during the contest, merely escape to command mode and enter the new serial number by using the SERIALNO command.

SETUP

MODE: ALL

Default: see table below

All possible baud rates and modem configurations are displayed on the SETUP menu. The selected baud rates and modem configurations are also shown.

Anytime the MFJ-1278 default values are loaded the baud rate and modem default profile is loaded as well. The defaults are:

Modem	Mode	Default Baud Rate/ Speed/ Format
P	VHF Packet	1200
H	HF Packet	300
V	VHF BAUDOT RTTY	45
H	HF BAUDOT RTTY	45
V	VHF ASCII RTTY	110
H	HF ASCII RTTY	110
C	CW	20 WPM
C	Memory Keyer	20 WPM
C	Modulator CW	20 WPM
P	WeeFAX/ FAX	3 (120 Lines Per Min.)
P	SSTV	1 (8.5 Sec. Format)
H	AMTOR/Navtex	100
M	Multi-level FAX/SSTV	all formats

Terminal baud rate and modem configurations may be changed by using SETUP command.

SFNLON|OFF

Mode: AMTOR

Default: OFF

SFNL controls whether the MFJ-1278 adds a new line character to "+?" and WRU.

SLOTS nnn

Mode: Packet

Default: 3

Parameter:

nn 0 - 127, specified the number of sides on the slot time dice.

This parameter determines how many sides are on the slot time dice. SLOTS represents an n+1 sided dice the TNC "throws" before transmitting. The SLOTS command allows any number of slots from 1 thru 127 to be defined.

SLOTS (n)	REMARKS
1	Disables Slotting
2	
4	This should be the default setting
8	Use only if the channel is VERY busy.
16	VERY VERY VERY busy !
32	You get the idea.
64	
128	Might as well print it out & send it in the mail.

The value used on a particular channel should be agreed on by the channel users. Access to the channel will be equitably distributed among all users if everybody is using the same value for the SLOTS and DEADtime parameters.

The idea is to pick a value large enough that the probability of two queued up stations picking the same value is relatively small. On the other hand, the value chosen should be small enough that most of the time, ONE of the queued up stations will have a significant probability of picking the first available slot. In this way, the channel is reliably arbitrated and at the same time the overhead required for the arbitration is minimized so that overall throughput on the channel is maintained. The actual value used will depend on the average number of queued up stations there are on the channel during busy periods.

SOLF ON|OFF

Mode: AMTOR

Default: ON

OFF then carriage return and linefeed characters are passed directly through to the terminal, otherwise every received linefeed character will generate a <CR>,<LF> newline sequence.

START n Mode: All Default: \$11 <CTRL-Q>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command selects the User Restart character, which is used to restart output from the MFJ-1278 to the terminal after it has been halted by typing the User Stop character. You can enter the code in either hex or decimal.

The User Stop character is set by the STOP command.

If the User Restart and User Stop characters are set to \$00, software flow control to the MFJ-1278 is disabled, and the MFJ-1278 will only respond to hardware flow control (CIS).

If the same character is used for both the User Restart and User Stop characters the MFJ-1278 will alternately start and stop transmission upon receipt of the character.

STATUS Mode: AMTOR Default: (command)

STATUS returns diagnostic information useful for helping us help you with your problems. Please note the STATUS value when writing to us about any problems you encounter with AMTOR mode.

STOP n Mode: All Default: \$13 <CTRL-S>

Parameters:

n 0 - \$7F, specifying an ASCII character code.

This command selects the User Stop character, which is used to stop output from the MFJ-1278 to the terminal. You can enter the code in either hex or decimal. This is the character you will type to halt the MFJ-1278's typing so that you can read text before it scrolls off your display.

Output is restarted with the User Restart character, which is set by the START command.

If the User Restart and User Stop characters are set to \$00, software flow control to the MFJ-1278 is disabled, and the MFJ-1278 will only respond to hardware flow control (CTS).

If the same character is used for both the User Restart and User Stop characters the MFJ-1278 will alternately start and stop transmission upon receipt of the character.

STREAMCA ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Callsign of other station displayed.

OFF Callsign of other station not displayed.

This command is used to enable the display of the connected-

STREAMDB ON|OFF

Mode: Packet

Default: OFF

Parameters:

ON Double all received STREAMSwitch characters.

OFF Do not "double" received STREAMSwitch characters.

STREAMSW n

Mode: Packet

Default: \$7C < | >

Parameters:

n 0 - \$FF, usually specifying an ASCII
 character code.

This command selects the character used by both the MFJ-1278
and the user that a new "stream" (connection channel) is
being addressed.

The character can be PASSED in CONVERS mode. It is always

SYSOP Mode: Packet immediate command

When MAILBOX is ON, the local user can access the mailbox by typing the immediate command, SYSOP. All commands are available to the SYSOP. When the SYSOP has completed operating the MAILBOX, he must return to command mode with "Control-C" (or the current COMMAND character) to allow remote users access to the MAILBOX.

TBITMASK \$xx Mode: RTTY/ASCII Default: 0

xx 0 - \$7F, specifying the bit inversion during transmitting.

TBITMASK command controls the bit inversion applied to transmitted ASCII and RTTY. Bit inversion is a simple means of encryption. TBITMASK can be set to a desired inversion pattern during transmitting.

Note that encryption of transmitted data is illegal for amateur application.

TINV ON|OFF Mode: AMTOR Default: OFF

TINV controls whether the MFJ-1278 inverts the transmitted AMTOR signals. It is similar to TXINVERT in RTTY/ASCII modes.

TRACE ON/OFF

Mode: Packet

Default: OFF

Parameters:

ON Trace mode is enabled.

OFF Trace mode is disabled.

This command is used to enable the protocol debugging function. When TRACE is ON, all received frames will be displayed in their entirety, including all header information. In normal operation you will probably never need this function; however, if you need to report an apparent software bug, we may ask you to provide trace information if possible.

A trace display will appear in four columns on an 80-column display. Following is an example trace display. For compa-

KV7B>CQ,KF7B*:this is a test message

The trace display would look like this:

```
byte  -----hex display----- -shifted ASCII--  -----ASCII-----
000:  85A24040 40406096 AC5E8440 4060963C CQ   OKV7B  OKF  ..4040..n..40..
010:  6E844040 E103F074 53697320 59732051 7B   P.x:449.49.0 n.40...this is
020:  20746573 74206D55 73735157 650D   .:29:.5299032.   test message.
```

The **byte** column shows the offset into the packet of the beginning byte of the line. The **hex display** column shows the next 16 bytes of the packet exactly as received in

DRING

Modem Protocol

Terminal Control

TRIES n

Mode: Packet

Default: NONE

Parameters:

n 0 -15, specifying the current RETRY level on
 the currently selected input stream.

This command is used to retrieve (or force) the count of
"tries" on the currently selected input stream.

When used with no argument: if the MFJ-1278 has an
outstanding unacknowledged frame, it will return the current
number of tries; if the MFJ-1278 has no outstanding
unacknowledged frames, it will return the number of tries
required to obtain an acknowledgment for the previous frame.

If RETRY is set to 0, the value returned by issuing a TRIES
command will always be 0.

This command is useful for obtaining statistics on the
performance of a given path or channel. It should be espe-
cially useful for automatic optimizing so such parameters as
PACLEN and MAXFRAME by computer-operated stations, such as
automatic message forwarding stations using less than enti-

TUNEPROC

Mode: All

Immediate Command

TUNEPROC is a immediate command. It is used to calibrate the MFJ-1278 modulators and demodulators. See APPENDIX B under "Modulator and De-Modulator Calibration" for the use of TUNEPROC.

TVHSYNC ON|OFF

Mode: SSTV

Default: OFF

When receiving SSTV pictures, your MFJ-1278 will usually maintain correct synchronization with the picture as long as the transmitting station is keeping accurate time. However some stations may attempt to use tape recorder or other unstable picture sources. In case the received picture is skewed or very unstable, setting TVHSYNC ON may help.

When TVHSYNC is ON it causes your MFJ-1278 to look for horizontal sync by looking for dark areas that indicate sync around the picture's edges. Note well that TVHSYNC ON may

TVMODE n

Mode: SSTV

Immediate Command

The TVMODE command selects the formats under the SSTV mode for the MFJ-1278. The MFJ-1278 supports all SSTV formats listed in table below.

TVMODE(n)		Formats

1		8.5 seconds
2		12 seconds
3		17 seconds
4		24 seconds
5		36 seconds

The SSTV format can be changed by using the TVMODE (n)

TVBREAK n Mode: SSTV Default: (see below)

n = sss,aaa,bbb,ccc,ddd,eee,fff,ggg

TVBREAK command is arranged in the following format:

TVBREAK sss,aaa,bbb,ccc,ddd,eee,fff,ggg-

where,

sss is the sync. The default value is \$42.

aaa is the black area, the default value is \$28.

ggg is the white area, the default value is \$30.

bbb thru fff are gray areas between the black area and the white area.

The default TVBREAK values are:

TVBREAK \$42,\$27,\$28,\$2A,\$2B,\$2D,\$2F,\$30

Note that the values for TVBREAK are in HEX. The smaller values represent the darker shade of gray. \$30 is the lightest gray and \$27 is black. All other TVBREAK values in between \$27 and \$30 define the other gray levels of the

TVX ON|OFF

Mode: SSTV

Default: OFF

Parameters:

ON	Multi-level SSTV raw data is sent to the terminal without preset SSTV format.
OFF	Multi-level SSTV raw data is sent to the terminal in format set by the TVMODE command

TVX command sets the format which the MFJ-1278 sends the SSTV pictures to the terminal. When TVX is turned ON, SSTV picture format is not preset. The terminal program must be responsible to detect the end of the SSTV picture. MFJ-1278 does not detect the end of the picture no matter what TVMODE is set. This means that MFJ-1278 can receive any format of SSTV picture. It is not limited by TVMODE. Picture lengths longer than 36 seconds are possible as long as the terminal program can detect the end of the picture when the picture is being received.

When TVX is turned OFF, SSTV picture format is determined by the setting of TVMODE. For example, if TVMODE is set to 5 (36 seconds format), the picture sent to the terminal will end at 36 seconds. Which means that if you set the TVMODE too short, you may not receive the whole picture.

TVX is automatically turned OFF when PRINTGRA is turned ON; this sends SSTV picture being received to the built-in printer port. SSTV pictures are sent to the printer port in 4 gray levels when PRINTGRA is set to ON.

TXDELAY n

Mode: Packet

Default: 30

Parameters:

n 0 - 120, specifying 10 ms intervals.

This value tells the MFJ-1278 how long to wait after keying up the transmitter before sending data. Some startup time is required by all transmitters to put a signal on the air; some need more, some need less. In general, crystal controlled rigs with diode antenna switching don't need much time.

TXDELAYC nnn

Mode: Packet

Default: 2

Parameter:

nnn 0 thru 255 in 1 ms step

The time delay between when the MFJ-1278 depresses the PTT
and when it starts sending packets is modified in terms of

TXFLOW ON!OFF

Mode: All

Default: OFF

Parameters:

- ON Software flow control can be enabled for the MFJ-1278 in Transparent Mode.
- OFF Software flow control is disabled for the MFJ-1278 in Transparent Mode.

If TXFLOW is ON, the setting of XFLOW is used to determine the type of flow control used in Transparent Mode. If TXFLOW is OFF, the MFJ-1278 will use only hardware flow control and all data sent to the terminal remains fully transparent.

If TXFLOW and XFLOW are ON, the MFJ-1278 will use the MFJ-1278 Restart and MFJ-1278 Stop characters (set by XON and XOFF) to control input from the terminal. Unless TRFLOW is also ON, only hardware flow control is available to the computer or terminal to control output from the MFJ-1278.

Note that if the MFJ-1278 Restart and MFJ-1278 Stop characters are set to \$00, hardware flow control will always be selected regardless of the setting of TXFLOW.

TXINVERT ON|OFF

Mode: RTTY/ASCII

Default: OFF

When TXINVERT is ON, transmitted RTTY/ASCII data by the MFJ-1278 are sent inverted, i.e. the marks are sent as spaces and vice versa.

TXTMO n n=0-65535

Mode: Packet

Default: 0

TXTMO is a HEALTH counter that registers the number of packet transmitter timeout/recovery events that have occurred since the MFJ-1278 was powered up.

TXUIFRAME ON|OFF

Mode: Packet

Default: ON

TXUIFRAME is used to tell the MFJ-1278 what to do with unconnected information left in its buffers. When this

UNSHIFT ON|OFF

Mode: RTTY

Default: ON

In Baudot RTTY receive mode only, UNSHIFT ON forces the receiver shift to the LTRS case whenever the Baudot SPACE character is received. This helps in many situations in reducing garbling when conditions are not good.

Some stations, particularly those transmitting weather information and other strings of numeric text, are not compatible with unshift on space (USOS). When receiving those stations, UNSHIFT should be turned OFF.

UNPROTO call1

Code: Packet

Default: "CQ"

[via call2[,call3...,call9]]

Parameters:

call1 Callsign to be placed in the TO address field.

call2 - 9 Optional digipeater call list, up to eight calls.

This command is used to set the digipeat and destination address fields of packets sent in the unconnected (unprotocol) mode. Unconnected packets are sent in 2 frame frames with the destination and digipeat fields taken from call1 through call9 options. When no destination is specified, unconnected packets are sent to CQ. Unconnected packets sent from other TNCs can be monitored by setting MONITOR ON and setting BUDLIST and LCALLS appropriately. The digipeater list is also used for BEACON packets (which are sent to destination address BEACON).

USERS n Mode: Packet Default: 1

Parameters:

n 0 - 10, specifying the number of active connections that may be established to this MFJ-1278 by other TNCs.

USERS affects only the manner in which incoming connect requests are handled, and has no effect on the number or handling of connections you may initiate with this MFJ-1278.

For example,

USERS 0 allows incoming connections on any free stream
USERS 1 allows incoming connections on stream A only
USERS 2 allows incoming connections on streams A & B
USERS 3 allows incoming connections on streams A, B & C

and so on through USERS 10.

WDMODE ON|OFF Mode: AMTOR Default: OFF

WDMODE (word mode) determines whether mode A transmission takes place any time you type a SPACE or RETURN character, or only when you type a carriage return.

WDMODE OFF, the default condition, sets the MFJ-1278 so that it buffers you're transmitted text a line at a time before sending it. If it's ON, the MFJ-1278 immediately sends each word as you end it with a SPACE or RETURN.

WEIGHT n n = 0 thru 255 Mode: CW Default: 0

The WEIGHT command is used to set the weight factor applied to paddle and CW keyboard generated code elements. The value of weight is represented as a 2's complement byte and it alters the dot / space ratio. Therefore one should use values between 128 and 255 to DECREASE the weight factor, and 1 to 127 to INCREASE the weight factor.

The number specified results in an absolute increase or decrease in the ratio of dot to space time that is equivalent to approximately 8.67 ms.

NOTE: For weight calculation purposes, a dash gets the factor applied to only 1 of its 3 dot times. So that the time added to or removed from each element whether it is a dot or a dash is either removed from or added to the space following the element.

WRU Mode: AMTOR Default: (command)

The WRU command causes the remote mode A "ARQ" station currently in contact with to transmit it's answerback message (if any).

WRU is a standard signal recognized by most AMTOR stations. The WRU response will vary from station to station.

(also see ANSBSTR)

MFJ-1278 MESSAGES

This chapter describes the messages your MFJ-1278 may produce and the circumstances under which they can appear.

Packet Messages

```
*:J  
bbRAM:LOAD WITH DEFAULTS  
MFJ Enterprises, Inc.  
Model MFJ-1278  
AX.25 Level 2 Version 2.0  
RELEASE X.X.X - DATE - 32K RAM  
Checksum XXX  
cmd:
```

This is the sign-on message that appears when you turn on your MFJ-1278 or when you issue the RESET command. The release number will be updated whenever the firmware is changed. The checksum is a hex number which you can compare against the correct checksum given for the firmware version you are using.

bbRAM loaded with defaults

This message appears along with the sign-on message above if the battery backed-up RAM checksum verification fails at power-on time, causing the MFJ-1278 to load the default parameters from ROM. (This will be the case the first time you turn on your MFJ-1278.)

This message also appears if the MFJ-1278 loads the defaults in response to the RESET command.

cmd:

This is the Command Mode prompt. When this prompt appears, the MFJ-1278 is waiting for you to issue a command. Anything you type after this prompt will be interpreted as a command to the MFJ-1278. If a monitored packet has been displayed, the prompt may not be visible, even though you are in Command Mode. You can type the redisplay-line character (set by REDISPLA)

was

Whenever you change the setting of one of the MFJ-1278's parameters, the previous value will be displayed. This confirms that the MFJ-1278 properly interpreted your command, and reminds you of what you have done.

too many packets outstanding

This message would appear in response to a **CONVERS** or **TRANS** command, under special circumstances. If you have previously entered packet data filling the outgoing buffer in Converse Mode or Transparent Mode and then returned to Command Mode. You will be allowed to enter one of these modes when some of the packets have been successfully transmitted.

Mailbox Messages

? Not while mail server enabled

This message occurs when you are trying to access the mailbox when the system operator is using his mailbox.

You have mail!

Upon access to a mailbox, this message will appear if there are messages addressed to you.

?EH

This message occurs when a command issued is not understood by the mailbox. This could be out of range slot number, missing slot number where one is required, or bad command.

Cannot, not yours

This message occurs when a remote user attempts to kill a message which is not his, or he tries to read personal message by or for someone else.

?Mailbox full

This message occurs when either all of the available slots (30) are full, or the actual message space (3000 bytes) is full. Messages must be killed to recover from this error.

Not found

This message occurs when one attempts to read or kill a non-existent message from an empty slot.

None found

A parameterless Kill or Read command. Can not find any messages addressed to the user.

Command Mode Error Messages

If you make a mistake typing a command to the MFJ-1278, an error message will be printed. You may see any of the following messages depending on the type of error you have made.

?bad

You typed a command correctly, but the remainder of the command line couldn't be interpreted.

?call

You entered a **callsign** argument that does not meet the MFJ-1278's requirements for **callsigns**. A **callsign** may be any string of numbers and letters, including at least one letter. Punctuation and spaces are not allowed. The sub-station ID, if given, must be a (decimal) number from 0 to 15, separated from the call by a hyphen.

?clock not set

This message appears if you give the command DAYTIME to display the date and time without having previously set the clock. DAYTIME sets the clock if it is given with the daytime parameters, and displays the date and time if it is given without parameters.

?EH

The first word you typed is not a command or a command abbreviation.

?not enough

You didn't give enough arguments for a command that expects several parameters.

?not while connected

You attempted to change MYCALL or AX25L2V2 while in a connected or connecting state.

?range

A numeric argument for a command was too large.

?too long

You entered too long a command line, and the line was ignored. This might happen, for example, if you try to enter too long a message with BTEXT or CTEXT. If you get this message, the previous text entry was not

?VIA

This message appears if you attempt to enter more than

These messages inform you of the status of AX.25 connections your MFJ-1278 may be involved in. You can always interrogate the link status by giving the CONNECT command without parameters. If you attempt a connection when your MFJ-1278 is not in the disconnected state, the MFJ-1278 will display the link status but will take no other action. The following messages appear in response to the CONNECT command.

Link state is: CONNECTED to call1
[VIA call2[,call3...,call19]]

This display shows the station your MFJ-1278 is

Link state is: FRMR in progress

The MFJ-1278 is connected but a protocol error has occurred. This should never happen when two TAPR TNCs are connected. An improper implementation of the AX.25 protocol could cause this state to be entered. The MFJ-1278 will attempt to re-synchronize frame numbers with the TNC on the other end, although a disconnect may result. Connects are not legal in this state, and a disconnect will start the disconnect process.

The MFJ-1278 will inform you whenever the link status changes. The link status may change in response to a command you give the MFJ-1278 (**CONNECT** or **DISCONNE**), a connect or disconnect request packet from another station, a disconnect due to the retry count being exceeded, an automatic time-out disconnect (**CHECK**), or a protocol error.

***** CONNECTED to: call1 [VIA call2[,call3...,call9]]**

This message appears when the MFJ-1278 goes from the "disconnected" or "connect in progress" state to the connected state. The connection may be a result of a **CONNECT** command you issued, or of a connect request packet received from another station.

***** connect request:call1 [VIA call2[,call3...,call9]]**

This message indicates that the MFJ-1278 has received a connect request from another station which it has not accepted. This can happen if you have set **CONOK OFF** or if you are already connected to another station. When the MFJ-1278 types this message it also sends a DM packet (busy signal) to the station that initiated the connect request. If the MFJ-1278 rejects a connect request because you have set **CONOK OFF**, you can issue your own request to the station that called.

***** DISCONNECTED**

This message is displayed whenever the MFJ-1278 goes to the disconnected state from any other link state. This message may be preceded by a message explaining the reason for the disconnect, below.

*** retry count exceeded
*** DISCONNECTED

This message is given if the disconnect was caused by a retry failure rather than by a disconnect request from one of the stations.

*** <callsign> busy
*** DISCONNECTED

This message indicates that your connect request was rejected by a DM packet (busy signal) from the other station. The MFJ-1278 will reject a connect request if CONOK is OFF, or if it is already connected to another station, or the connect request is from a station with a totally blank callsign.

frmr frame just sent:
FRMR sent: xxxxxx

The MFJ-1278 is connected, and a protocol error has occurred. The MFJ-1278 has sent a special FRMR packet to attempt to re-synchronize frame numbers with the MFJ-1278 on the other end. The string xxxxxx is replaced with the hex codes for the three bytes sent in the FRMR packet.

HARDWARE

This chapter includes detailed specifications and a functional description of the hardware design of the MFJ-1278.

MFJ-1278 Specifications

Processor CMOS Z-80A

Clocks Processor master clock input frequency: 4.9152 MHz
User Port Clock: Switch selectable at 16x baud rate.

Memory All memory in industry-standard JEDEC Byte-Wide sockets.

Standard complement of ROM: 64K = 1 x 27C512

Standard complement of RAM: 32K = 1 x 43256C-15L

Serial Port Z8440 SIO/O port B configured as UART plus low-power TTL-to-RS-232C signal level interface.

Baud rates supported: 300, 1200, 2400, 4800 and 9600.

Standard female DB-25S (DCE) RS-232C connector.
8-pin TTL connector for TTL serial port.

Modem Demodulator: XR2211 PLL demodulator circuit plus related components to receive up to 1200 baud.

Modulator: XR2206 modulator circuit plus related components to produce tones for all modes of operation.

Built-in modem calibration system.

An external modem may be attached via a single connector which completely bypasses the on-board modem.

Tuning Indicator is built in to support tuning aid for all modes of operation.

EEPROM Non-volatile storage of all important operating

backed-up system for the entire 32K bytes of system RAM.

Protocol AX.25 Level 2 is supported. Pre-Version 2.0 support is compatible with earlier TAPR TNCs running 3.x software. Full support of Version 2.0 protocol is provided. Full duplex radio link operation is supported.

Packet Operating Modes Command Mode: accepts commands via user port.
Converse Mode: accepts digital data, transmits and receives packets, permits terminal editing features (character delete, line delete, input packet delete, output packet delete and redisplay input) via special characters trapped by the MFJ-1278. Escape to command mode via special character or BREAK signal. Optional use of packet completion timer as in Transparent mode.

Transparent Mode: accepts digital data, transmits packets via packet completion timer or buffer full only, and receives packets. No local editing features permitted. Escape to command mode via specially timed character sequence or BREAK sig-

clock oscillator, baud-rate generator, memory-space decoder, power supply and voltage inverter, clock recovery, transmit watch-dog timer and modem. Refer to the schematic diagram while reading the following circuit descriptions.

Detailed Circuit Description

tion timing functions.

Inverter U10e buffers the radio port "16x" baud-rate signal in case it is routed, via modem disconnect J4 pins 11 and 12, to an external modem. If this buffer were not included, reflections from the distant termination might cause counter U1 to generate count errors.

Counter U4b provides a properly scaled clock for the transmit NRZ to NRZI encoder (see Serial Interface, below).

CPU Complex

EPROM U23 provides system ROM for program storage. Selector U12a acts as a ROM decoder, mapping the ROM into the CPU's memory address space beginning at address 0.

Static RAM provides system RAM for temporary scratch-pad storage, message buffers, etc. Also, because the RAM is backed up by a battery and will not lose its contents when the main power is removed, it is used to provide semi-permanent storage of user-supplied information (such as your callsign). Selector U12b acts as a RAM address decoder, with RAM starting at address 8000 hex.

The sections of CMOS switch U13 are used to insure that the RAM is not selected when main power is removed. This ensures that the contents of the RAM are not accidentally scrambled as the CPU loses power; it also ensures that the RAM is in the "power-down" state for minimum battery power consumption.

Serial Interface

Serial Input/Output (SIO) device U21 provides two channels of serial I/O.

The B SIO channel is used for the computer or terminal interface. Operational amplifier sections U3a, U3b, and U3d act as RS-232C drivers while Schmitt trigger inverters U9a and U9b act as RS-232C receivers. These circuits consume less power than conventional RS-232C drivers and receivers.

The A SIO channel is used for the radio/modem interface and is normally operated as a full duplex HDLC channel for compatibility with the AX.25 protocol specification. Latch U5 and ROM U6 provide a "state machine" for recovering the clock from the received NRZI data. The state machine also converts NRZI data to NRZ for the SIO. Inverter U9c and flip-flop U11a provide NRZ to NRZI conversion for the transmit side of the radio channel. This conversion between NRZ

formatted data and NRZI formatted data is necessary because the AX.25 protocol specification requires NRZI operation while the SIO is only capable of NRZ. Jumper JMP11 may be used to bypass the NRZ --> NRZI conversion for use with external modems, if required.

Watch-dog Timer

Inverters U7c, U7d, U7e, and Q10 provide a "watch-dog" timer on the transmit key line to ensure that the transmitter does not remain keyed for more than about 30 seconds if the TNC fails. This allows you to leave a station (such as a remote digipeater) on-the-air and unattended without much chance of having a malfunction "lock up" the packet channel. This also helps ensure compliance with FCC regulations regarding unattended station operation.

Jumper JMP4 is provided for testing purposes. When JMP4 is installed, timing capacitor C31 is shunted, disabling the watch-dog timer.

Modem

U16, an XR2206, is a Frequency Shift Keying (FSK) modulator that generates an audio data signal for use by the radio transmitter. Two tones are used, one for each digital level, and these tones may be calibrated via trimpots R77/R78, R105/R106, R119/R122 and R139/R138 in conjunction with the on-board calibration support circuitry and software. When the transmitter is not being keyed, transistor Q9 is switched on, thus preventing U16 from producing tones. This allows you to leave a microphone connected to your packet transmitter for voice operation.

R157 and R158 are used to set the tone output levels to the

If you want to interface your MFJ-1278 with a device configured as DCE, such as a telephone modem or another TNC, a so-called "null modem" cable may be constructed to interchange the data and handshake signals. See for example Byte, February, 1981, page 198.

Jumper Functions

The following table lists the function of each jumper on the MFJ-1278. For normal operation a shorting jumpers must be placed on the following connectors: JMP 5; JMP 8; JMP 9; JMP 13; JMP 14 pin 1,2; JMP 16 pin 1,3 - pin 2,4 and on J4 pin 11,12 - pin 13,14, pin 17,18.

Jumper #	Position	Function
JMP1	Pin 1 & 2	!DCD (RS-232C) stays on
	Pin 2 & 3	!DCD (RS-232C) stays off
	OFF (default)	!DCD reflects connect status
JMP2	Pin 1 & 2 (default)	4.92 MHz CPU clock
	Pin 2 & 3	2.46 MHz CPU clock
JMP4	ON	disable Tx watch-dog
	OFF (default)	enable Tx watch-dog
JMP5	ON (default)	Lithium battery connected
	OFF	Lithium battery disconnected
JMP6	NOT used	
JMP7	ON	analog loopback mode
	OFF (default)	normal modem operation
JMP8	ON (default)	demodulator enabled
	OFF	demodulator calibrate
JMP9	Pin 1 & 2	calibrate U16 tones
	Pin 2 & 3 (default)	normal modem operation
JMP10	ON	digital loopback mode
	OFF (default)	normal modem operation
JMP11	LEFT	transmit data NRZ
	RIGHT (default)	transmit data NRZI
JMP12	Pin 2 & 3	16k RAM (2 x 6264)
	Pin 1 & 2 (default)	32k RAM (1 x 43256)

Jumper #	Position	Function
JMP13	ON (default)	TTL, RTS enable
	OFF	TTL, RTS disable
JMP14	Pin 1 & 2 (default)	FSK out normal
	Pin 2 & 3	FSK out reverse
JMP15	Pin 1 & 2	U23 is 27C256 type
	Pin 2 & 3 (default)	U23 is 27C512 type
JMP16	Pin 1 & 2	Without multi-gray levels
	Pin 1 & 3 (default)	With multi-gray levels
	Pin 2 & 4 (default)	
JMP17	Pin 1 & 2	2400 baud ext. modem clock
	Pin 2 & 3 (default)	9600 baud ext. modem clock
JMPA	ON	without multi-gray levels
	OFF (default)	with multi-gray levels
JMPB	ON (default)	on board transmit low tone
	OFF	out board transmit low tone
JMPC	ON	external DCD enabled
	OFF (default)	external DCD disabled
JMPJ	ON	TX audio has flat response
	OFF (default)	TX audio 6db/oct pre-emphasized
JMPK	ON	TX audio loopback to PTT
	OFF (default)	(for Radio Port 2)
JMPL	ON	TX audio loopback to PTT
	OFF (default)	(for Radio Port 1)
JMPR	ON	Analog audio loopback
	OFF (default)	(for Radio Port 1)
JMPS	not used	
JMPX	ON (default)	Speaker Transmit Tone Enable
	OFF	Speaker Transmit Tone Disable
JMPY	ON (default)	Speaker Receive Tone Enable
	OFF	Speaker Receive Tone Disable
JMPZ	ON (default)	Speaker Connect Tone Enable
	OFF	Speaker Connect Tone Disable

Parallel Printer Port Pin Function - J12

Printer Port Pin #	Pin Function
1	Strobe
2	Data Bit 1
3	Data Bit 2
4	Data Bit 3
5	Data Bit 4
6	Data Bit 5
7	Data Bit 6
8	Data Bit 7
9	Data Bit 8
10	Acknowledge
11	Busy
12 thru 17	No connection
18 thru 25	Ground

External I/O Interface Port Pin Function - CN1

CN1 Pin #	Pin Function
1	Read Request
11	Write Request
2	Data Bit 1
5	Data Bit 2
6	Data Bit 3
9	Data Bit 4
12	Data Bit 5
15	Data Bit 6
16	Data Bit 7
19	Data Bit 8
3	Address Bit 1
4	Address Bit 2
7	Address Bit 3
8	Address Bit 4
13	Address Bit 5
14	Address Bit 6
17	Address Bit 7
18	Address Bit 8
10	Ground
20	+ 5 Volts

Multi-level Interface Connector - J13

J13 Pin #	Pin Function
1	No connection
2	No connection
3	No connection
4	Ground
5	SSTV/FAX receive signals
6	153.6 KHz clock
7	SSTV/FAX select
8	SSTV/FAX transmit tones
9	SSTV/FAX receive control
10	SSTV/FAX transmit control
11	-5 Volts
16	Data Bit 1
17	Data Bit 2
18	Data Bit 3
19	Data Bit 4
15	Data Bit 5
14	Data Bit 6
13	Data Bit 7
12	Data Bit 8
20	+5 Volts

External Modem Interface Connector - J14

J14 Pin #	Pin Functions
1	-5V
2	+5V
3	Ground
4	Receive Audio
5	Transmit Audio

Modem Disconnect - J4

The modem disconnect, J4, on the MFJ-1278 PC board is provided for using an external modem with the MFJ-1278. This allows use of higher-speed modems, such as 9600 baud, or more sophisticated, higher-performance modems for OSCAR or other uses.

The following information is primarily for those who wish to interface external modems to the MFJ-1278. Familiarity with modem and serial data channel terms is assumed.

The signals used at connector J4 are at standard TTL interface levels. A TTL high, or 1, is greater than +2.4 volts but less than +5.25 volts. A TTL low, or 0, is less than 0.8 volts but greater than -0.4 volts. DO NOT connect an RS-232C level modem directly to J4!

NOTE: The modem disconnect is similar, but not identical to that used in TNC 1. Be very careful about interfacing an external modem using the same cabling you may have prepared for use with TNC 1!

The connector pin-outs are as follows.

Pin 1 Carrier Detect Input

This pin tells the SIO radio port that a valid data carrier has been detected. It should be pulled high when no carrier is detected and low when a carrier is present. This line must be implemented unless the software release notes indicate otherwise. It is normally jumpered to pin 2 when the on-board modem is used.

Pin 2 Carrier Detect Output

This pin is an output from the the on-board modem and satisfies the requirements outlined for pin 1 above. It is normally jumpered to pin 1 when the on-board modem is used.

Pin 3 SIO Special Interrupt Input

This signal is routed to the radio port DCD input pin on SIO U21. This signal is normally used during modem calibration. It may also be used for other purposes; if so, these functions will be listed in the software release notes. This pin is normally jumpered to pin 4 when the on-board modem is used.

Pin 11 Transmitter Clock (16x) Input

This pin is tied to the NRZ-to-NRZI converter, which expects a clock signal at 16 times the desired radio port data rate, e.g., 4800 Hz for 300 baud. This pin is normally jumpered to pin 12 when the on-board modem is used.

Pin 12 Transmitter Clock (16x) Output

This pin is tied to the radio baud rate switch network. It provides a clock at 16 times the desired radio port data rate. This pin is normally jumpered to pin 11 when the on-board modem is used.

Pin 13 Receive Clock Input

This pin is tied to the SIO receive clock input pin. It expects a clock at the desired data rate (1200 Hz for 1200 baud), of the proper phase relationship to the received data. This pin is normally jumpered to pin 14 when the on-board modem is used.

Pin 14 Receive Clock Output

This pin is the received data clock signal derived from the NRZI-to-NRZ state machine. This pin is normally jumpered to pin 13 when the on-board modem is used.

Pin 15 MFJ-1278 Ground Reference

This pin ties to the MFJ-1278 digital ground system, at the SIO.

Pin 16 Tubro LED output

This pin is used to connect the Tubro LED on the mother board to the external modem board. When this pin is high (+5Vdc), the Tubro LED will light.

Pin 17 Receive Data Input

This pin is the received data input to the NRZI-to-NRZ state machine. This pin is normally jumpered to pin 18 when the on-board modem is used.

Pin 18 Receive Data Output

This pin provides receive data from the on-board modem. This pin is normally jumpered to pin 17 when the on-board modem is used.

Pin 19 Transmit Data Output

This line is the NRZ or NRZI (depending on the state of JMP11) data output. This pin is normally jumpered to pin 20 when the on-board modem is used.

Pin 20 Transmit Data Input

This input line accepts data to be transmitted by the modem. This pin is normally jumpered to pin 19 when the on-board modem is used.

If you elect to use an off-board modem, be sure to properly shield the interconnecting cables for RFI protection.

HF Tuning Indicator

The MFJ-1278 has a built-in tuning indicator for HF operation. It is set for a center frequency of 2210 Hz. The incoming audio frequency is centered at 2210 Hz. This is indicated by one or two of the center most LEDs brightly lit. When you are tuned to a lower center frequency, the LED to the left of center lights. When you are tuned too high, the right of center LED lights. The resolution between each bar segment is approximately 10 Hz.

TROUBLESHOOTING

WARNING: Never remove or insert an IC with power on!

Your MFJ-1278 is a complex piece of electronic equipment.

If no voltage appears at -V, then U2 or a related component may be at fault. Verify that U2 is oscillating by looking at the wave form at U2 pin 5. If -V is more negative than -7 volts (i.e. normal) but the 5 volt regulated voltage is

Symptom: TNC appears dead

If the MFJ-1278 powers up with the PWR, STA, and CON LEDs lit, followed by STA and CON extinguishing a second or so later, the processor is working and the software is probably working correctly. You should suspect the terminal port at this point. Check all connections and verify the logic levels according to the terminal interface troubleshooting section in this chapter.

Oscillator and Reset Circuits

If no LEDs wink during the reset cycle the problem may be more serious. Check to see that the crystal oscillator is working and that an "M1" signal (154 kHz square wave, 0 to +5 volts) is coming from U22 pin 27. The crystal oscillator input to the processor (U22) is pin 6. The input clock should be a (possibly distorted) square wave signal. Verify that the clock input at pin 6 of U22 is running at the correct frequency (near 4.9152 MHz).

Verify that the battery backed-up RAM protection circuit, composed of Q4, U14 and associated devices, is going to +5 volts at U14 pin 6 after input power is applied. This signal enables normal operation of U24 and U25. There should be a logical low on the output of U7 pin 12 coincident with the application of power and lasting for a few hundred milliseconds. Without this RESET signal, the 280 probably won't start up properly.

Digital Logic Lines

Remember that all the logic circuits operate at standard TTL levels (a "low" is less than +0.8 V and a "high" is greater than +2.4 volts), and all digital inputs and outputs switch between these two levels. Thus, if you see logic signals switching between 0 and, say, 1 volt, you can be sure there is a problem (usually a short). On the other hand, do not mistake switching transients on digital logic lines for improper operation -- these show up as ringing and other distortions.

Verify that there is activity on the control bus READ and WRITE lines, the 3 CHIP-ENABLE lines on the memories (U23-25, pins 20), the IOREQ line on U21 pin 36, and the INT line on pin 16. Each of these lines should show activity, and if any line is quiet this is a sign of trouble.

Logic lines that show no activity may often be traced to a short on the pc board, probably due to a solder splash or bridge.

Address and data line shorts may also show up as lack of activity on the control bus lines, especially the chip selects. Check each of the 16 address and 8 data lines for activity. Any lines showing a lack of activity are not operating properly.

If you suspect problems with address or data lines, try removing all the memory chips. Each address and data line will now show a distinct pattern. The address lines should be (possibly distorted) square waves whose periods increase by a factor of two on successive lines as you step line by line from A0 to A15.

If you decide to use an ohmmeter to check for shorted lines, use a low voltage/low current test instrument. (Most Modern DVMs are fine for this.) If in doubt, remove any ICs connected to the lines you are measuring. If you suspect a short, check the high density areas of the PC board for the problem. In most cases the short will be found there. It is very unlikely that the PC board itself will have a short.

Symptom: Modem won't calibrate or key transmitter.

Troubleshooting improper calibration amounts to checking for proper signals at U21 and following up any improper signal. If the calibration signal is present, but you cannot successfully calibrate the frequency, you may have an out-of-spec frequency determining component. Check the values of the appropriate passive components. Also, check the placement of jumpers! As a last resort, check the signal frequency with a frequency counter. Note that, due to frequency jitter while calibrating the demodulator, the STA and CON LEDs may blink somewhat even when the 1700 Hz demodulator frequency is correct.

Calibration of the demodulator and the modulator tones are discussed in the Appendix chapter.

If the transmitter doesn't key, the problem may be in the watchdog timer, U7, or the PTT transistors, Q10 or Q20. Check especially for an open timing capacitor C31 or a bad solder connection associated with R83.

Symptom: Uncopyable transmitted or received packets

If no one seems able to decode your packet transmissions, it is often the case that your transmitter is being overdriven. The solution is to reduce the drive level via trimpots R157 and R158. Note that direct connection to typical microphone

inputs requires R157 or R158 to be turned to near the minimum signal position to produce sufficiently low signal levels.

If you are having problems hearing other stations, the demodulator circuitry associated with U20 may be at fault. Check the center frequency of the VCO in U20 using the calibration procedure. Working in the direction of flow of the input signal from the radio, verify that it is being passed through to pin 2 of U20, the input pin. The signal there should be above 50 mV and below 3 V peak-to-peak for proper operation of the demodulator. It should be relatively clean, although a few tens of millivolts of noise is normal, and the signal amplitude should not change by more than about 25% between high and low tones.

Note: Make sure that IMD 2 is on

faulty soldering (shorts, cold joints, etc.)

Symptom: The MFJ-1278 appears to be signing on but only gibberish is printed on the terminal.

This indicates that some combination of the data rate (baud rate), parity option, or number of start and stop bits are not set the same at the MFJ-1278 and at the terminal. If possible, set your terminal to 1200 baud. Also verify that the terminal is set for eight data bits, no parity, and 1 stop bit. These are the default settings stored in EPROM. Perform a hard reset by the power switch OFF then ON (out then in). The sign on message should appear.

If the MFJ-1278 still prints gibberish, verify that the terminal is set to the MFJ-1278's baud rate and do a power off then on cycle on both the MFJ-1278 and terminal. If the message still fails to appear try troubleshooting with an oscilloscope, looking first at the TXD pin (pin 26) of U21 (Z8440), then at the x16 baud rate clock (19200 Hz at 1200 baud) on pin 27 of U21.

Symptom: The MFJ-1278 signs on OK but won't accept commands.

After the MFJ-1278 signs on, try giving it a command such as MYCALL or any other command. If the default settings are in effect, it will attempt to echo each character you type back to the screen. If it doesn't echo, be sure that U21 pin 23 has a voltage level between 0 and +0.8 volts on it. The voltage on U9 pin 3 should be greater than +3 volts. If these voltages aren't correct, the fault could be in U9, U21, J1, R20, R22, soldering, or the interconnecting cable.

If the above checks are OK, use an oscilloscope to verify that data is present on U21 pin 28 and U9 pin 1 when you strike a key on your terminal. If not, the data isn't getting from your terminal to the MFJ-1278. Check J1, the cable and U9 again. Finally, be sure that your terminal actually uses levels less than -3 volts and greater than +3 volts for signal levels. 0 and +5 volts may not work, especially if they are being used direct from a computer.

Symptom: The MFJ-1278 appears to have "lock-up" i.e. not responding to any commands.

This may be due to some invalid parameters having been stored in the memory. Try turning the MFJ-1278 off and disconnect JMP 5 on the MFJ-1278 board. This will disconnect the memory back-up circuit and allow the memory

to be erased. Re-install JMP 5 after about 2 minutes and try operating again.

PACKET RADIO PROTOCOL

Explanation of Protocol

The material in this chapter is intended to supply an overview of the packet protocol used to transmit data by the TAPR software. MFJ-1278 employs the **genuine** TAPR TNC 2 packet software. References are given to more detailed information required by those wishing to implement these protocols on other hardware. The material presented below is somewhat tutorial in nature for those who have not had previous exposure to layered network protocols, but it presumes some knowledge of general communications hardware and software. Persons already well versed in networking may want to skip this chapter and refer to the primary defining document, Amateur Packet-Radio Link-Layer Protocol, AX.25 Version 2.0, available from the ARRL, 225 Main Street, Newington, CT 06111 (\$8.00 US, postpaid in the United States as of this writing).

The MFJ-1278 hardware and software architecture is organized in accordance with the International Standards Organization (ISO) layered network model. The model describes seven levels and is officially known as the ISO Reference Model of Open Systems Interconnection, or simply the ISO Model. The model and many other interesting topics are discussed in Computer Networks by Andrew S. Tanenbaum.

The ISO model provides for layered processes, each supplying a set of services to a higher level process. The MFJ-1278 currently implements the first two layers, the Physical layer and the Data Link layer.

Physical Layer

The duty of the Physical Layer, layer one, is to provide for the transmission and reception of data at the bit level. It is concerned only with how each bit is physically transmitted, i.e., voltages on a hardwire line or modem tones on phone or RF links.

The physical layer of the MFJ-1278 is described in Chapter 7, Hardware. It is compatible with the various TNCs currently available to radio Amateurs. The actual modem interface is compatible with the Bell 202 standard which is similar to the CCITT V.23 standard. Any other hardware device which is compatible with the Bell 202 standard should

be compatible with the MFJ-1278, at least at level one of the ISO reference model.

Data Link Layer

The duty of the Data Link layer is to supply an error-free stream of data to higher levels. Since level one simply passes any bits received to level two and is unaware of the content or overlying structure of the data, transmission errors are not detectable at level one. Level two carries the responsibility of detecting and rejecting bad data, retransmitting rejected data, and detecting the reception of duplicate data.

Level two accomplishes this task by partitioning data to be transferred by level one into individual frames, each with its own error detection field and frame identification fields. The MFJ-1278 supports two versions of a level-two layer, AX.25 version 1.0 and AX.25 version 2.0. Each of these protocols is based on HDLC, the High-Level Data Link Control protocol defined by the ISO.

HDLC Frames

Exact knowledge of the format of HDLC frames has been made largely unnecessary by the advent of LSI and VLSI communications chips which interface directly with the level one hardware. The level two software need only supply data to fill in various fields and the chip takes care of the rest. For completeness however, an HDLC frame looks like this:

| FLAG | ADDRESS | CONTROL | PID & DATA | FCS | FLAG |

FLAG A unique bit sequence (01111110) used to detect frame boundaries. A technique called "bit stuffing" is used to keep all other parts of the frame from looking like a flag.

ADDRESS A field normally specifying the destination address. AX.25 uses a minimum of 14 bytes and a maximum of 30 bytes containing the actual call

3 protocol is implemented, if any. In the case where no Level 3 protocol is implemented, PID = \$F0.

DATA This field contains the actual information to be transferred. This field need not be present. Most frames used only for link control do not have data fields.

FCS Frame Check Sequence, a 16-bit error detection field.

The communications chip recognizes the opening and closing flags and passes the address, control, and data (including PID) fields to the software. The FCS field is a Frame Check Sequence computed by the transmitting chip and sent with the frame. The receiving chip recomputes the FCS based on the data received and rejects any frames in which the received FCS does not match the computed FCS. There is virtually no chance of an undetected bad frame using this method. This satisfies the level two task of bad data detection.

The communications chip used in the MFJ-1278 is a Zilog 8440 SIO operating in conjunction with a two-chip "state machine" which is used to recover the data clock. The transmitted data is encoded in NRZI form, which encodes a "0" data bit as a transition in the encoded bit stream and a

eight bits, while AX.25 uses from 112 to 560 bits, containing the originator's call sign, the destination call sign and an optional list of one to eight digipeater (simplex digital repeater) call signs.

The UI frame is used to send information bypassing the normal flow control and acknowledgment protocol. The UI frame is not acknowledged but can be transmitted at layer two without fear of disturbing higher layers. It is used for beacon frames, for automatic identification packets, and for sending information frames when the MFJ-1278 is not connected to another TNC, e.g., CQ and QST activities.

The exact specifications for AX.25 are supplied in the ARRL publication Amateur Packet-Radio Link-Layer Protocol, AX.25 Version 2.0. The TAPR implementation adheres to this standard for AX.25 version 2.0. The implementation of version 1.0 is almost identical to the TAPR TNC 1 version of AX.25 protocol in software releases 3.x. This provides compatibility with the majority of Amateur packet radio stations.

The following table lists the frame types used by AX.25 and describes their purpose. This material is provided to give a general understanding of the protocol, and is not intended to replace the published specification. The byte fields are given as they appear in memory after data is received, i.e., the high order bit is at the left and the low order bit is at the right. This is also the format of the display provided by the TRACE command. Some texts, including the AX.25 protocol specification, list the bits in the order in which they are transmitted, which is low order bit first.

The control bytes are presented in hex with "x" used to indicate some bits which depend on the submode function.

Table 9-1. AX.25 Control Codes

Code	Abbrv	Frame Type
x1	RR	Receive Ready
x5	RNR	Receive Not Ready
x9	REJ	Reject
03	UI	Unnumbered Information
0F	DM	Disconnected mode
2F	SABM	Connect request
43	DISC	Disconnect request
63	UA	Unnumbered Acknowledge
87	FRMR	Frame reject
even	I	Any frame ending in an even number (including \$A, \$C, and \$E) is an information frame.


I This and UI frames are the only frame types containing user data. The control byte contains this frame's number and the number of the next frame.

UI An I frame without a frame number. It is not acknowledged.

Channel Use and Timing Functions

The following discussions mention timing parameters which are set by various commands. These timing functions are also discussed in Chapter 5.

An important part of any packet radio protocol is the means by which many stations make efficient use of an RF channel.

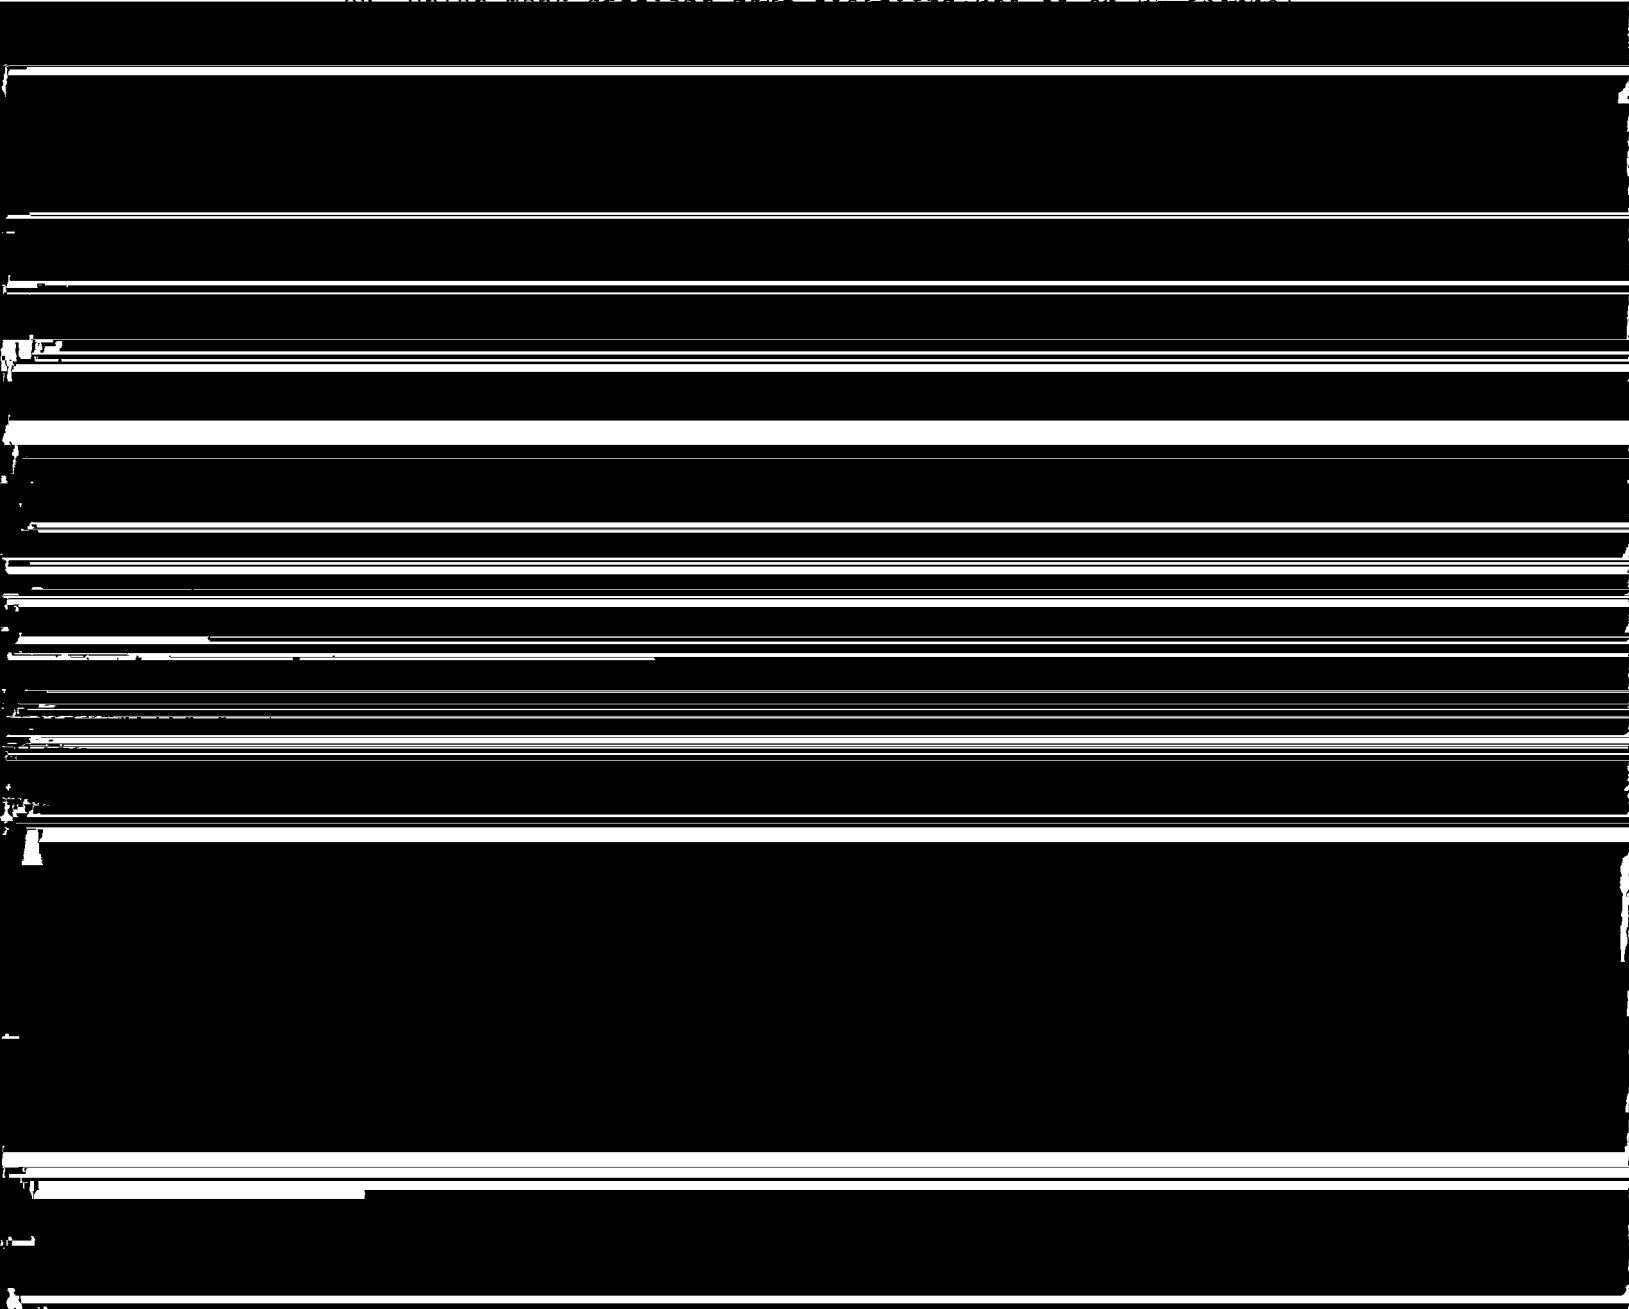

In order to avoid a second collision, the collision avoidance protocol calls for the stations retrying transmissions to wait a random time interval after hearing the frequency become clear before they key their transmitters. There must be enough different random wait times to provide a reasonable chance of two or more stations selecting different values. The difference between adjacent time values must be similar to the keyup time delay of typical stations on the frequency. This is the time lapse after a station keys its transmitter before other stations detect its presence on the channel, and is a function of the keying circuitry of the transmitter and the signal detection circuitry of the receiver. We have chosen the random time to be a multiple (0-15) of the transmitting station's keyup delay (TXDELAY). This is reasonable if one's own keyup delay is similar to that of other stations on the channel.

One other factor must be taken into consideration in optimizing data throughput. The currently implemented link protocols provide for relaying (digipeating) of packets. The acknowledgment procedure for such packets is that the relay station simply repeats packets without acknowledgment to the sending station. The receiving station sends its ACK back through the same digipeaters to the originating station. Since the digipeated packets are not acknowledged to the digipeater, an unsuccessful transmission must be retried from scratch by the originating station. In order to help alleviate the congestion of the frequency that tends to result when digipeated packets suffer collisions, the digipeater is given first shot at the frequency every time it becomes clear. Other stations, instead of transmitting as soon as they hear the channel clear, must wait a short time (DWAIT). This restriction applies to all stations except the digipeater, which is permitted to transmit relayed packets immediately. This prevents digipeated packets from suffering collisions except on transmission by the originating station.

A special time delay (RESPTIME) is used as the minimum wait time prior to transmitting acknowledgment frames, to prevent TNCs accepting data at high speed from the asynchronous port from colliding with acknowledgment frames when fewer than MAXFRAME packets are outstanding. The receiving TNC will wait long enough before sending the ACK so that it will hear the data packet which would have caused the collision, thus avoiding a fairly frequent source of delay in versions of

Channel Flow Control

Flow control of data through the link is determined by the rate at which data is being supplied to a sending TNC and accepted from a receiving TNC.

A TNC receiving data from the link will send an RNR when the next 1 frame successfully received will not fit into the buffer for output to the serial port.

Whenever a TNC transmitting data received from the serial port over the link runs out of temporary buffer space, the serial port will be halted by an XOFF character or CTS signal. In the MFJ-1278 implementation this happens whenever there are 7 packets built and less than 210 characters left in the buffer for input from the serial port.

When the TNC receiving data from the link clears out its buffers, it sends an RR to the transmitting TNC. In order to guard against the possibility of the RR being lost and the link becoming permanently locked, the transmitting TNC will periodically re-transmit the packet that provoked the RNR. The receiving TNC will continue to respond with RNR until it can accept the packet.

Table: A-1 HOOKUP FOR SPECIFIC RADIOS

MFGS. OR RADIOS	CONNECTOR TYPE	MIC. AUDIO	PTT	RX. AUDIO	GROUND
		To pin 1 of 1278	To pin 3 of 1278	To pin 4 of 1278	To pin 2 of 1278
KENWOOD	4 pin	pin 1	Pin 2	Speaker	Pin 3,4
	5 pin	Pin 1	Pin 2	Speaker	Pin 4,5
	6 pin	Pin 1	Pin 2	Speaker	Pin 6
	8 Pin	Pin 1	Pin 2	Speaker	Pin 7,8
TR-2500	HTs	Tip-Lg.	Sleeve-Lg	Tip-Sm.	Sleeve-Sm
TR-x600	HTs	Ring-Lg.	Sleeve-Lg	Tip-Sm.	Sleeve-Sm
TH-x1xx	"	"	"	"	"
TH-x15	"	"	"	"	"
TH-x5	"	"	"	"	"
ICOM	4 pin	Pin 1	Pin 2	Speaker	Pin 4
	8 pin	Pin 1	Pin 5	Speaker or pin 8	Pin 6,7
	HTs*	Tip-Sm	Tip-Sm	Tip-Lg.	Sleeves
YAESU	4 pin	Pin 2	Pin 3	Speaker	Pin 1
	8 Pin	Pin 8	Pin 6	Speaker	Pin 7
FT-208	HTs	Pin 1	Pin 3	Pin 2	Pin 4
FT-x09	HTs*	Tip-Sm	Tip-Sm	Tip-Lg	Sleeves
FT-x3	HTs*	"	"	"	"
FT-727	HTs*	"	"	"	"

*: Some ICOM and Yaesu HTs key the transmitter by completing the ground connection on the microphone. If your HT is one that is noted in the above chart, you must follow the instruction given in Chapter 3 of this instruction manual.

NOTE: The radio connection information listed in the above

MODEM CALIBRATION

MFJ-1278 Modem is factory calibrated to operate all of the operation modes. If it becomes necessary to re-calibrate the modem, follow the following procedure:

Modulator and Demodulator Frequency Calibration

Two Modulator and Demodulator Calibration procedures are presented. Method I requires test equipment as noted. Method II does not require test equipment.

Method I

Test equipment required: DVM, frequency counter and oscilloscope.

For All Modes

1. After the cmd: prompt, enter the following command to change the MFJ-1278 to HP mode:

MODE HP <CR>

MFJ-1278 responds:

RADIO: 1 TERMINAL: 4800
MODEM: HF PACKET, 300
CMD:

2. Type: CALSET 32 <CR>

MFJ-1278 responds:
cmd:

3. After the cmd: prompt, enter the following to set the frequencies:

CALI <CR>

4. Place the frequency counter probe at pin 1 of JMP 9.
5. Push on a jumper at JMP 4 and JMP 7.
6. Press the "K" key on your computer or terminal (no carriage return is needed for this command).

it is -5 Vdc instead of +5 Vdc, push the space bar. The voltage should alternate between +5 Vdc and -5 Vdc each time the space bar is pressed. Set this point to

installed. Adjust R139 for 850 Hz, ± 2 Hz.

17. Press RETURN key on the computer keyboard and adjust R138 for 1500 Hz, ± 2 Hz.
18. Press RETURN key and adjust R78 for 1300 Hz, ± 2 Hz.
19. Press RETURN key and adjust R77 for 2100 Hz, ± 2 Hz.
20. Press RETURN key and adjust R122 for 2125 Hz, ± 2 Hz.
21. Press RETURN key and adjust R119 for 2975 Hz, ± 2 Hz.

22. Press RETURN key and adjust R115 to about 10 Hz.

37. " : 2200 Hz, "

38. " : 2250 Hz, "

39. Press the RETURN key. MFJ-1278 will display:

```
Multilev Demod
1550 Hz: 53
53
```

Note that the "53" on the third line will fluctuate between 50 to 59. This is normal.

40. Press the RETURN key. MFJ-1278 will display:

```
Multilev Demod
2250 Hz: 35
35
```

Note that the "35" on the third line will fluctuate between 30 to 40. This is normal.

Method II

MFJ-1278 Modulator and Demodulator Calibration with CALSET.

This procedure is a three step process. The three steps are:

1. Center the modulator tones over the required modem center frequency (F_c).
2. Align the demodulator center frequency.
3. Align the tuning indicator.

NOTE: ALL THREE STEPS SHOULD BE PERFORMED IN THE ABOVE

For the 200 Hz shift 300 baud modem used for HF packet this would be $F_c + 100$ Hz for the high tone and $F_c - 100$ Hz for the low tone.

Set Modulator Tones Using Built-in Calibration Software

1. Make sure that the modem and TNC are both configured for 200 Hz shift 300 baud operation. This is done by typing "MODE HP <CR>" from the command prompt on the MFJ-1278.
2. Place a push on jumper at JMP 4.
3. Place a push on jumper at JMP 9, pins 1 and 2. This connects the modulator square wave output to the SIO

13. Select the high tone by pressing the space bar until a voltmeter connected to U16, pin 9 reads + 5 volts.
14. Adjust R105 carefully until both the "CON" and "STA" LEDs on the front panel of the MFJ-1278 are lit.
15. Remove the jumper placed at JMP 9.

This completes the modulator tone alignment using the built in calibration facility.

Now that the modulator tones have been properly centered over the intended modem center frequency (F_c), the demodulator center frequency will be aligned.

Demodulator Center Frequency Alignment

1. Place push on jumpers at JMP 4 and JMP 7 if they are not already in place.
2. Remove jumper at JMP 9 if it is still in place.
3. Set the baud rate for use by RXCAL to 300 baud by typing "CALSET 32 <CR>". This will cause the modulator to send a square wave FSK signal when RXCAL is invoked. CALSET 8 should be used if you are aligning the 1200 baud wide shift packet demodulator.
4. Command the MFJ-1278 to do a demodulator calibration by typing "RXCAL <CR>".
5. CAREFULLY adjust R113 until the DCD LED on the front panel is fully illuminated.

NOTE! The threshold control on the MFJ-1278 must be set to a position which will allow the DCD circuit to function properly. A setting approximately $1/3$ to $1/2$ of the total range starting from maximum CCW should be adequate.

Continue to VERY CAREFULLY adjust R113 until the STA and CON LEDs on the front panel either change state very slowly (alternate which one is lit) or until both are simultaneously illuminated.

NOTE! This is a very critical adjustment and it is unlikely that you will be able to cause both LEDs to be turned on simultaneously for longer than a very brief instant.

6. Return the MFJ-1278 to command mode by typing a "Q".

This completes demodulator center frequency alignment using the built in calibration facility.

Now that the demodulator and modulator are properly aligned to one another, the tuning indicator can be set for proper

the air reports suggest that you are transmitting and

MFJ-1278 Adjustment Location Map

This is a map of the physical locations of the adjustment potentiometers on the MFJ-1278 circuit board. They are shown as they appear when looking down on top of the board with the board oriented so that the rear panel connectors are to the left. Information in the boxes is organized as shown below.

PART	MODE
CALSET	#

DEMODULATOR

R113	HP
CALSET	32

R114	VB
CALSET	32

R79	VP
CALSET	8

R115	CW
NO CALSET	
SEE NOTE	

PART	MODE	H/L	PART	MODE	H/L
FREQ	/	CALSET	FREQ	/	CALSET

MODULATOR

R106	HP	L	R77	VP	H
2110		250	2100		250

R122	VB	L	R105	HP	H
2125		248	2310		228

R78	VP	L	R119	VB	H
1300		404	2975		177

R138	SS1V	H	R129	MCW	
1500		351	850		618
			SEE NOTE		

NOTE! Separate procedure required to do alignment of CW demodulator center frequency.

NOTE! CW receive through a narrow filter for HF CW operation will require the CW demodulator center frequency to be selected to align with the radio's filter passband. MCW operation on VHF FM will require that both stations

have both the modulator tone and demodulator center frequency to the same frequency.

Calset Values for Various Modulator Tone frequencies

Tone	CALSET #	Adjust	Modem / Remarks
2110	250	R106	HF Packet & RTTY Fc = 2200 Hz
2310	228	R105	200 Hz shift
1300	404	R78	Packet / Fc = 1700 Hz, 800 Hz shift. CCITT V.23 std., preferable for HF 1200 baud, works well on VHF FM too.
2100	250	R77	
1200	438	R78	Packet / 1000 Hz shift standard. Too wide to fit comfortably through SSB filters for linear mode 1200 baud use
2200	240	R77	
2125	248	R122	VHF RTTY Fc = 2550 Hz
2975	177	R119	850 Hz shift
750	701	R139	CW
775	678	R139	CW
800	657	R139	CW
825	637	R139	CW
850	618	R139	CW / SSTV
1500	351	R138	SSTV
2178	242	R122	HF RTTY/ASCII/AMTOR Fc = 2220 Hz
2263	233	R119	85 Hz shift.

MFJ-1278 CW Modem Tune-up Procedure

The CW modem in the MFJ-1278 is fundamentally different from the other modems. It is NOT an AFSK modem. It sends and receives only 1 tone. For this reason, it requires a different alignment procedure than the others.

NOTE! If the modulator AND demodulator are not EXACTLY on the same frequency for BOTH stations involved in VHF FM MCW operation, CW receive will be degraded if not eliminated.

NOTE! If the DEMODULATOR is not EXACTLY centered in the receiver's CW filter passband, CW receive performance through a narrow filter will be degraded. Also, the demodulator will likely not be receiving on the transmitted signal frequency. This note is for the HF direct keyed radio case (NOT MCW via SSB transmitter microphone audio which is discouraged).

Since MCW operation is primarily intended to provide a means to transmit code practice and not for CW reception, the demodulator center frequency may be set to a different frequency than the modulator without penalty in most cases. Typically, the modulator will be set to 850 Hz, and the demodulator will be set to whatever frequency is dictated by the HF radio with which it is to be used.

The CW demodulator can be used without a narrow filter in the radio. It will of course be subject to more noise and QRM in this case. The tuning range for the demodulator will be VERY restricted even though the wide filter is used in the radio since the demodulator itself acts as a very narrow filter.

An oscilloscope will be required to adjust the demodulator to a 50 percent duty cycle square wave output. The main difference when aligning the CW modem is that there will be only 1 continuous tone presented to the demodulator for this adjustment.

Tuning the CW modem is basically a 4 step procedure. The steps should be followed in the order presented. The steps (in broad outline) are:

1. Determine the required demodulator center frequency (F_c) for the radio you intend using in the direct keyed CW mode.
2. Set the CW modulator tone to this frequency.

3. Set the demodulator center frequency using the modulator tone as reference.
4. Set the modulator tone to 850z.

Detailed CW Demodulator Alignment Procedure

1. Determine the required Fc for the demodulator. If the radio has a narrow filter for CW, one of the 2 methods presented elsewhere in this manual should be used to determine the filter center frequency. This frequency should be used for Fc. If the radio has no narrow CW filter, use the CW carrier offset frequency of the radio. This information should be available in the radio manuals.
2. Set the modulator tone to the required Fc using the following procedure.
 - a. Command the MFJ-1278 into MCW mode by typing "MODE MC <CR>".
 - b. Install push on jumper at JMP-4. This is the watchdog timer defeat jumper.
 - c. Place a push on jumper at JMP 9, pins 1 and 2. This connects the modulator square wave output to the SIO chip so that the CPU can measure the tone frequency for you.
 - d. Type "CALSET n <CR>". Where n is a number determined by:

$$n = \text{INT} [525000 / F(\text{low})] + 1$$

This tells the CPU what tone frequency you are trying to achieve.

- e. Command the MFJ-1278 into calibrate mode by typing "CAL <CR>".
 - f. Command the MFJ-1278 to key the modem by typing "K".
 - g. Select the MCW tone by pressing the space bar until

- i. Remove the jumper placed at JMP 9.
- j. Return the MFJ-1278 to command mode by typing "Q".
3. Align the demodulator to Fc using the MCW tone. Use the following procedure.
 - a. Place a push on jumper at JMP 7. This connects the modulator output to the demodulator input.
 - b. Place a scope probe on left pin of JMP 10 (pin closest to Q 14). The oscilloscope will be used to indicate when the square wave that will appear at this point during the adjustment procedure approaches 50 percent duty cycle.
 - c. Command the TNC into calibrate mode by typing "CAL <CR>".
 - d. Command the TNC to key the modem by typing "K".
 - e. Select the MCW tone by pressing the space bar until a voltmeter connected to U16, pin 9 reads +5 volts. This signal is more conveniently available at the junction of Q12 collector and R62.
 - f. Turn R115 fully clockwise, until a click can be heard from turning the pot.
 - g. Now begin to rotate R115 CCW slowly. Watch the scope while rotating R115. A stable square wave should appear between about turn 4 and turn 9. Which turn on the pot where you find the spot that produces a stable square wave may vary from unit to unit. There are only about 1 to 2 turns where the square wave will appear on the scope.
 - h. Adjust R115 so the square wave displayed has a 50 percent duty cycle. Note that when R115 is adjusted properly, the period of the square wave should be about 0.66 milliseconds.

NOTE! If you have a square wave on the scope face but the tuning indicator is not near center, you are on a false setting. Adjust R115 so that the tuning indicator is near center and THEN set the square wave duty cycle.

4. If MCW transceive operation with another station is desired, do the above procedure to BOTH MFJ-1278s using an agreed upon frequency for Fc. Then leave the

modulator tone on the agreed on frequency with the
demodulator F_c .

5. Remove jumpers placed at JMP 4 and JMP 7.

This completes the CW modem alignment procedure.

AUDIO OUTPUT CALIBRATION

The transmit audio output levels of MFJ-1278 Radio Port 1 and Radio Port 2 both are factory set to 250 mV. If it is necessary to set either one of the radio port output to a different level necessary to drive your radio, you should follow the procedure given in this appendix.

Note that the output levels of radio port 1 and radio port 2 are set independently. Adjust R157 for radio port 1 and R158 for radio port 2. Both controls are accessible from the outside thru screw driver adjustment holes on the left side of the MFJ-1278. It is not necessary to remove the cover.

Most often audio output level of the MFJ-1278 can be set simply by monitoring the transmitting audio with a connecting station. However, if you require a more precise setting or making the adjustment without an on-the-air test, then use the procedure given here.

Audio Output Level Adjustment Procedure

1. After the cmd: prompt sign, set the MFJ-1278 to VHF packet mode by typing:

MODE VP <CR>
2. Verify that you are connected to radio port 1, type:

RADIO 1 <CR>
3. Enter: CALI <CR>
4. Press the "K" key. The PTT LED should illuminate.
5. Place the oscilloscope probe at JMP 7.
6. Signal on the scope should be approximately 1 volt p-p.
7. Verify that the voltage on pin 9 of U16 is -5 Vdc. If it is +5 Vdc instead of -5 Vdc, push the space bar. The voltage should alternate between +5 Vdc and -5 Vdc each time the space bar is pressed. Set this point to -5 Vdc.
8. Move the probe to J9 pin 1 (TX audio). Adjust R157 for a signal of 250 mV p-p or to a level recommended by your radio instruction manual.

9. Move the probe to J9 pin 4 (RX audio). The signal should be approximately 1 V p-p.
10. Press the space bar and again measure the peak to peak voltage at J9 pin 4. The audio level should not change. (Both mark and space audio should be at the same level.)
11. Type:
Q

the cmd: prompt appears on the screen.
12. Switch to radio port 2 by typing:
RADIO 2 <CR>
13. MFJ-1278 responds:
cmd:
14. Enter: CALI <CR>
15. Press the "K" key. The PTT LED should illuminate.
16. Verify that the voltage on pin 9 of U16 is -5 Vdc. If it is +5 Vdc instead of -5 Vdc, push the space bar. The voltage should alternate between +5 Vdc and -5 Vdc each time the space bar is pressed. Set this point to -5 Vdc.
17. Place the scope probe on J2 pin 1 (TX audio). Adjust

HF RADIO ALIGNMENT

If you have determined that it is necessary to realign the MFJ-1278 modem center frequency to your radio filter center frequency, one of the following 2 methods should be used to make the radio filter center frequency (F_c) determination. Both methods require access to a frequency counter capable of measuring audio frequencies to a resolution of 1 Hz. Almost any frequency counter should be capable of this.

First method: NOISE AVERAGE FREQUENCY

This method also requires an active noise source like a receiver noise bridge. There are several suitable units available for this purpose.

1. Set the receiver to LSB mode with the 500 Hz filter selected.
2. Connect the noise source to the receiver input. Make sure there is no antenna connected to the system and that the receiver is tuned to a frequency which is free of coherent internally generated signals (birdies).
3. Set the noise source output for a reading of approximately S-9 on the receiver S meter.
4. Connect the counter to the receiver audio output
5. Adjust the receiver output level for enough audio to reliably trigger the counter.
6. Make sure the radio's IF shift control, if one is present, is in its proper position (centered or on detente).
7. Record the frequency indicated by the counter. The counter should indicate the average frequency of the noise spectrum passed by the filter in the receiver and translated to audio by the product detector. This will be the frequency used for the modem center frequency (F_c).

NOTE: If the counter is a phase locked loop (PLL) based prescaling type, its PLL may not lock properly to the noise signal. If this is the case, use method 2 below. If your counter can resolve 1 Hz with a counting gate time of less than 1 second, it is a PLL prescaling counter.

Second method: FILTER SKIRT AVERAGE FREQUENCY

1. Set the receiver to LSB mode with the 500 Hz filter selected.
2. Make sure the radio's IF shift control, if one is present, is in its proper position (centered or on detente).
3. Using either a signal generator or a stable, relatively strong carrier from an AM broadcast transmission (preferably ground wave signal), tune the receiver so that the carrier falls near the center of the filter passband. Choose a signal level near S-9 for this test. If your rig has a built in calibration oscillator, this is a good source for this signal.
4. Slowly and carefully tune the receiver so that the tone frequency is decreasing.
5. Find the point where the signal is reduced by 1 S-UNIT from the peak value reached near the center of the filter passband.
6. Measure this tone frequency with the counter. Record this value as F(low).
7. Slowly and carefully tune the receiver so that the tone frequency is increasing.
8. Find the point where the signal is reduced by 1 S-UNIT from the peak value reached near the center of the filter passband.
9. Measure this tone frequency with the counter. Record this value as F(high).
10. Calculate the required modem center frequency as:

$$F_c = [F(\text{low}) + F(\text{high})] / 2$$

Once the required center frequency has been determined, the modem calibration can be carried out.

NOTE: It is essential that the modulator tones be properly aligned FIRST as they will be used to align the demodulator center frequency.

Set the modulator tones to F_c MINUS 100 Hz for the low tone and F_c PLUS 100 Hz for the high tone using the procedure given in the owners manual. Align the demodulator to the modulator tones using the built in demodulator alignment facility invoked with the RXCAL command described Appendix B of this manual.

CONVERTING THE MFJ-1278 TO "LIKE-TNC 2"

With a simple modification as described in APPENDIX E, the MFJ-1278 can be converted to a "like TNC 2" controller. Once converted, the MFJ-1278 can run programs such as NET/ROM (tm), THE NET (tm) and other special firmware which are developed for the TNC 2. The modification described below sets the MFJ-1278 into a "like" TNC 2 mode. What this means is the MFJ-1278 will work like a TNC 2. MFJ-1278 will be set to operate 1200 baud VHF packet. Radio port will be set to port No.1. Terminal baud rate will be set by the AUTOBAUD routine which is 300, 1200, 4800 or 9600 baud.

The modification involves in replacing IC U27 and U28 with pre-programmed header as shown in Figure E-1 and Figure E-2 below. Firmware EPROM, U23 will be replaced by an EPROM which contains program such as NET/ROM, THENET etc.

Modification of MFJ-1278 for "Like" TNC 2 operation involved making it to default 4800 baud for the terminal baud rate, 1200 baud radio baud using VHF packet tones on Radio Port 1. The procedure is as follow:

1. Remove power from the MFJ-1278.
2. Construct Header U27 by connecting pins 9, 12, 16 and 19 to ground at pin 10. Connect pins 2, 5 and 15 to +5 Volts at pin 20. See Figure E-1 below.

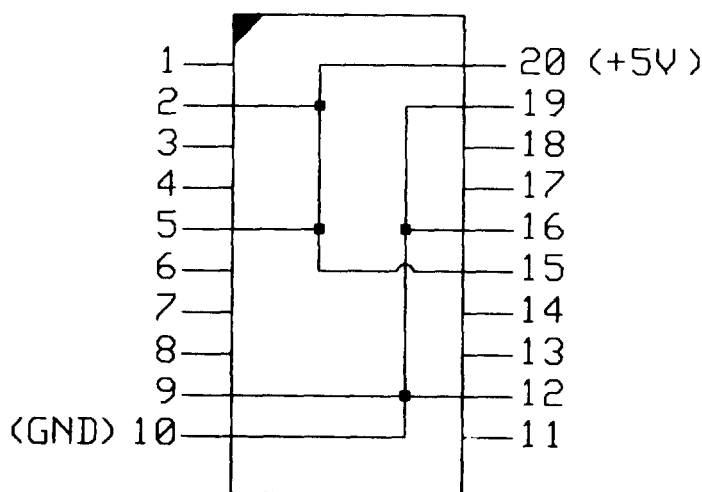


Fig. E-1: Header U27

3. Construct Header U28 by connecting pins 2, 5, 6, 12, 15 and 19 to ground pin 10. Connect pins 9 and 16 to +5 Volts at pin 20. See Figure E-2 below.

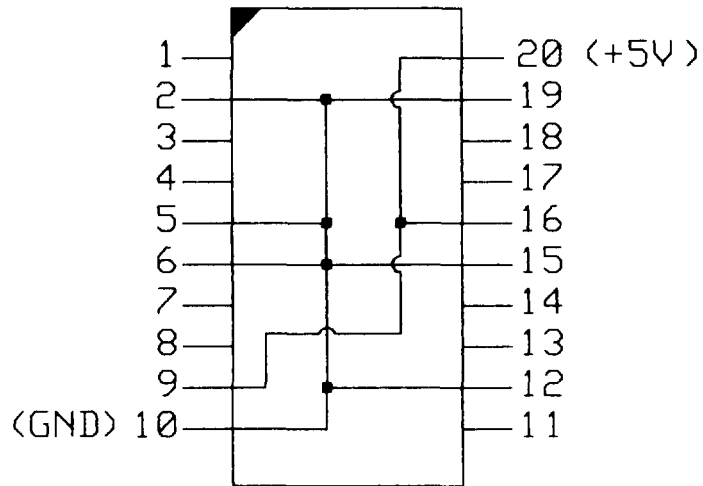


Fig. E-2: Header U28

4. Remove U27 on the MFJ-1278 PC board and replace it with Header U27.
5. Remove U28 on the MFJ-1278 PC board and replace it with Header U28.
6. Set the terminal program parameter as specified by the NET/ROM documentation.

Upon power on the MFJ-1278 should signed on like a TNC 2 and it is ready to operate NET/ROM or other TNC 2 firmwares.

MFJ-1278 2400 PACKET OPERATION

If your MFJ-1278 does not have the 2400 modem, an optional modem (MFJ-2400) can be purchased and installed. Installation is simple; your MFJ-1278 is equipped with all connectors necessary to make this installation without modification or soldering.

With the 2400 modem installed, your MFJ-1278 is capable of operating 300, 1200 or 2400 baud packet. 300 baud and 1200 baud packet are not affected by the installation of the 2400 modem.

The addition of the 2400 modem feature will in no way require any internal modification to your transceiver.

2400 Packet Operation Setup

All default parameters set for 1200 packet operation can be used for the 2400 operation. 2400 operation needs no unusual setup or parameter changes. There are however, some changes that can be made later to the MFJ-1278 parameters which will enable you to improve the speed the throughput

MFJ-1278 Instruction Manual APPENDIX F: 2400 PACKET MODEM

MODE VP,2400

MFJ-1278 will be set to 2400 packet operation. TURBO LED will light. 2400 packet can be operated with Radio Port 1 or Radio Port 2 on the MFJ-1278. Note that if your MFJ-1278 is not equipped with the 2400 modem, TURBO LED will not function and you will not be able to operate 2400 packet.

JUMPER FUNCTIONS AND LOCATIONS

The MFJ-1278 mother board has many jumper connectors. Each jumper connector has special function. The Jumper Function chart in this appendix identify each jumper function. Figure G-1 will help in locating the jumper connector easily.

For normal operation a shorting jumper must be placed on the following connectors: JMP 5; JMP 8; JMP 9; JMP 13; JMP 14 - pin 1,2; JMP 16 - pin 1,3 - pin 2,4 and on J4 -pin 11,12 - pin 13,14 - pin 17,18.

Table G-1: Jumper Function

Jumper #	Position	Function
JMP1	Pin 1 & 2	!DCD (RS-232C) stays on
	Pin 2 & 3	!DCD (RS-232C) stays off
	OFF (default)	!DCD reflects connect status
JMP2	Pin 1 & 2 (default)	4.92 MHz CPU clock
	Pin 2 & 3	2.46 MHz CPU clock
JMP4	ON	disable Tx watch-dog
	OFF (default)	enable Tx watch-dog
JMP5	ON (default)	Lithium battery connected
	OFF	Lithium battery disconnected
JMP6	NOT used	
JMP7	ON	analog loopback mode
	OFF (default)	normal modem operation
JMP8	ON (default)	demodulator enabled
	OFF	demodulator calibrate
JMP9	Pin 1 & 2	calibrate U16 tones
	Pin 2 & 3 (default)	normal modem operation
JMP10	ON	digital loopback mode
	OFF (default)	normal modem operation
JMP11	LEFT	transmit data NRZ
	RIGHT (default)	transmit data NRZI
JMP12	Pin 2 & 3	16k RAM (2 x 6264)
	Pin 1 & 2 (default)	32k RAM (1 x 43256)

Jumper #	Position	Function
JMP13	ON (default)	TTL, RTS enable
	OFF	TTL, RTS disable
JMP14	Pin 1 & 2 (default)	FSK out normal
	Pin 2 & 3	FSK out reverse
JMP15	Pin 1 & 2	U23 is 27C256 type
	Pin 2 & 3 (default)	U23 is 27C512 type
JMP16	Pin 1 & 2	Without multi-gray levels
	Pin 1 & 3 (default)	With multi-gray levels
	Pin 2 & 4 (default)	With multi-gray levels
JMP17	Pin 1 & 2	2400 baud ext. modem clock
	Pin 2 & 3 (default)	9600 baud ext. modem clock
JMPA	ON	without multi-gray levels
	OFF (default)	with multi-gray levels
JMPB	ON (default)	on board transmit low tone
	OFF	out board transmit low tone
JMPC	ON	external DCD enabled
	OFF (default)	external DCD disabled
JMPJ	ON	TX audio has flat response
	OFF (default)	TX audio 6db/oct pre-emphasized
JMPK	ON	TX audio loopback to PTT
	OFF (default)	(for Radio Port 2)
JMPL	ON	TX audio loopback to PTT
	OFF (default)	(for Radio Port 1)
JMPR	ON	Analog audio loopback
	OFF (default)	(for Radio Port 1)
JMPS	not used	
JMPX	ON (default)	Speaker Transmit Tone Enable
	OFF	Speaker Transmit Tone Disable
JMPY	ON (default)	Speaker Receive Tone Enable
	OFF	Speaker Receive Tone Disable
JMPZ	ON (default)	Speaker Connect Tone Enable
	OFF	Speaker Connect Tone Disable

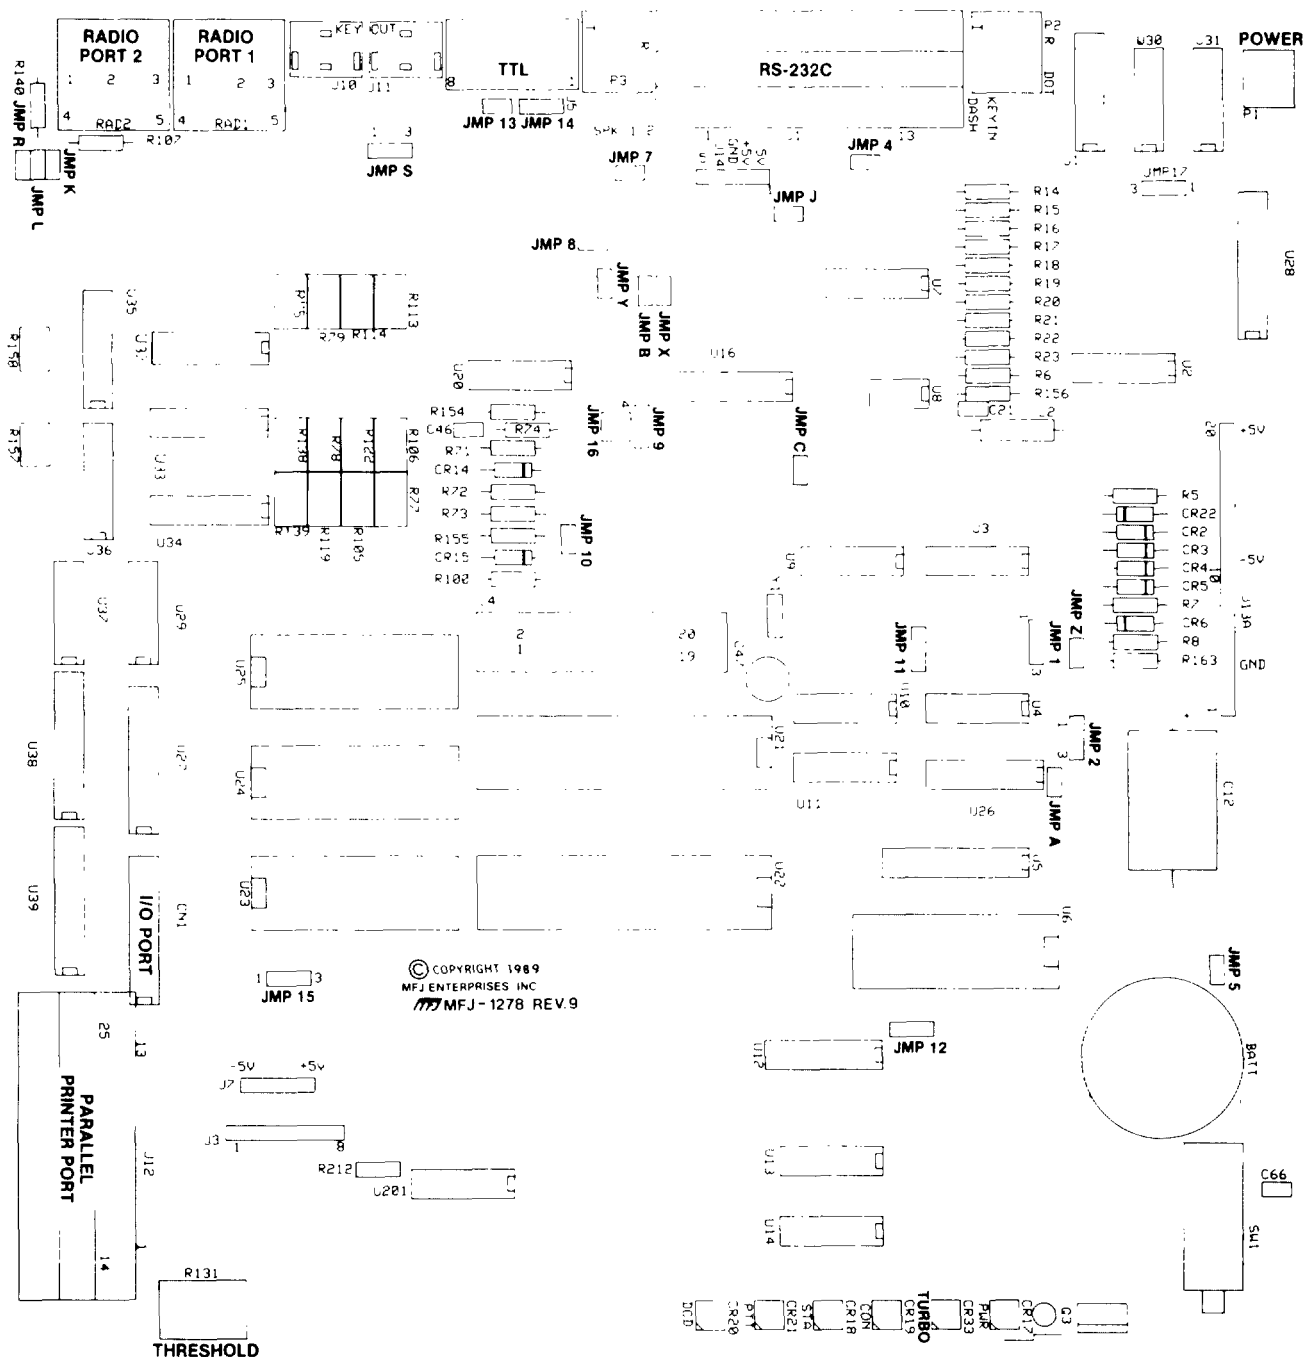


Fig. G-1: Jumper Connector Location

COMMAND SUMMARY

Command	Parameter	Default	Mode	Function	Page
<u>8BITCONV</u>	ON OFF	off	Packet	Enables transmission of 8-bit data in converse mode	6-5
<u>8LEVELS</u>	ON OFF	off	FAX/SSTV	Enables MFJ-1278 to operate 8 gray levels in FAX and SSTV modes.	6-5
<u>AALT</u>	ON OFF	off	AMTOR	Enables the alternate SELCALL set by the ALTCALL command in mode A ARQ.	6-6
<u>ACKPRIORITY</u>	ON OFF	on	Packet	Permits an acknowledging TNC to transmit without regard to slotting delay.	6-6
<u>ACKTIME</u>	n	30	Packet	Controls a delay that occurs whenever any packets that have been received are not addressed to that unit.	6-6
<u>ALOCKCHAR</u>	nn	\$15 (^U)	CW/MCW	Character used to force the MFJ-1278 to match its transmit speed to that of the incoming signal.	6-7
<u>ALTCALL</u>	ssss	blank	AMTOR	Sets an alternate SELCALL that the MFJ-1278 responds to in AMTOR mode A.	6-7
<u>ANSBSTR</u>	cccc	blank	AMTOR	Enables the MFJ-1278's response to a "Who Are You?".	6-7
<u>ARCVCHAR</u>	nn	\$12 (^R)	RTTY/CW/ASCII	Specifies the character used to return to receive after transmitting.	6-8
<u>ARQ</u>	ssss	I-command	AMTOR	Initiates mode A "ARQ" connection.	6-8
<u>ASENDCHA</u>	nn	\$14 (^T)	RTTY/CW/ASCII	Specifies the transmit character.	6-8
<u>ASPECT</u>	n	2	FAX	Sets a reasonable aspect ratio between the Hor/Ver. representation of the FAX picture.	6-9
<u>AUTOBAUD</u>	ON OFF	on	All	Enables the autobaud function which matches MFJ-1278 terminal baud rate to terminal program baud rate.	6-10
<u>AUTOLF</u>	ON OFF	on	Packet	Determines the way the <CR> characters are displayed.	6-11
<u>AUTOTRAC</u>	ON OFF	on	CW/MCW	Automatically locks onto the incoming cw signal and displays the speed.	6-11

Commands	Parameter	Default	Mode	Function	Page
<u>AWLEN</u>	n	8	All	Defines the word length used by the MFJ-1278's RS-232 port.	6-12
<u>AX25L2V2</u>	ON OFF	on	Packet	Determines the use of AX.25 Level 2 Ver. 2 or Ver. 1 Protocol.	6-13
<u>AXDELAY</u>	n	0	Packet	Sets the voice repeater keyup delay in 10 ms intervals.	6-14
<u>AXHANG</u>	n	0	Packet	Sets the voice repeater hang time in 100 ms intervals.	6-15
<u>BBSMSG5</u>	ON OFF	off	Packet	Controls the display of certain messages in command and CONVERS mode.	6-16
<u>BEACON(BEA)</u>	n	0	Packet	Sets the timing for an automatic transmission of a packet.	6-17
<u>BKONDRY</u>	ON OFF	on	Packet	Determines the use of the beacon tone.	6-18

<u>BTEXT</u>	text	blank	Packet	Specifies the text of the beacon packet.	6-19
<u>BUDLIST</u>	ON OFF	off	Packet	Determines if the packets listed in LCALLS are to be displayed.	6-20

Command	Parameter	Default	Mode	Function	Page
<u>CANPAC</u>	n	\$19 (^Y)	Packet	Changes the cancel-packet input editing command character.	6-25
<u>CBELL</u>	ON OFF	off	Packet	Sends a bell tone through the computer or terminal speaker when a packet connection is made.	6-26
<u>CCITT</u>	ON OFF	on	RTTY	Determines whether U.S. standard or the internationally recognized character set is used.	6-26
<u>CHECK</u>	n	30	Packet	Sets a connection timeout.	6-27
<u>CHECKV1</u>	ON OFF	off	Packet	Enables the automatic idle-link-disconnect feature for AX.25 L2V1 connections.	6-27
<u>CHANGE</u>	-	I-command	AMTOR	Switches from receiver to transmitter in AMTOR mode A "ARQ".	6-27
<u>CLKADJ</u>	n	0	Packet	Specifies the correction factor to be applied to the real-time clock routine.	6-28
<u>CONPERM</u>	ON OFF	off	Packet	Allows a connection to become permanent.	6-29
<u>CMDTIME</u>	n	1	Packet	Sets the transparent mode timeout value.	6-29
<u>CMSG</u>	ON OFF	off	Packet	Enable a message to be transmitted whenever there is a connection made.	6-30
<u>CMSGDISC</u>	ON OFF	off	Packet	Controls whether the MFJ-1278 will initiate a disconnect sequence after it is connected to.	6-30
<u>COMMAND</u>	n	\$03 (^C)	All	Sets the character used to enter the command mode from CONVERS mode.	6-31
<u>CONMODE</u>	C T	C	Packet	Sets the MFJ-1278 to enter the transparent mode or converse mode automatically.	6-32
<u>CONNECT</u>	C1 Cx	none	Packet	Issues a connect from the command mode to another packet station.	6-33
<u>CONOK</u>	ON OFF	on	Packet	Determines the action take by the MFJ-1278 when it receives a connect request.	6-34

Commands	Parameter	Default	Mode	Function	Page
<u>CONSTAMP</u>	ON OFF	off	Packet	Enables the time stamping when a dis- connect occurs.	6-35
<u>CONVERS</u>	-	I-command	All	Forces the MFJ-1278 to enter the converse mode.	6-35
<u>CONVERSE</u>	-	I-command	AMTOR	Switches from the command mode to the text transmission mode in AMTOR.	6-35
<u>CPACTIME</u>	ON OFF	off	Packet	Enables the automatic transmission of packets in the converse mode.	6-36
<u>CR</u>	ON OFF	on	Packet	Causes the MFJ-1278 to send a <CR> every time a new line character is sent.	6-37
<u>CTEXT</u>	text	blank	Packet	Determine the packet to be sent when a connect is made.	6-38
<u>CSTATUS</u>	--	I-command	Packet	Shows streams identifier and link state of all streams.	6-39
<u>CWCALL</u>	ssss	blank	AMTOR	Characters are sent as CW when ID character are issued.	6-39
<u>CWSENDCH</u>	nnn	000	CW	Controls how MFJ-1278 transmits the pending text in the CW buffer.	6-40
<u>CWSPEEDM</u>	ON OFF	off	CW	Causes the MFJ-1278 to adopt the incoming CW speed as its transmit speed.	6-40
<u>DAYTIME</u>	D/T	none	Packet	Sets time and date of the MFJ-1278.	6-41
<u>DAYUSA</u>	ON OFF	on	Packet	Determines the format for displaying the time and date.	6-42
<u>DEADTIME</u>	nnn	33(330ms)	Packet	Determines the basic time interval used by the slotting procedure.	6-43
<u>DELAY</u>	nn	20 (20ms)	AMTOR	Sets the delay between keying the transmitter and transmitting AMTOR.	6-44
<u>DELCHR</u>	n	^X	CW/RTTY/ ACCU	Used for deleting the content of the buffers.	6-44

Command	Parameter	Default	Mode	Function	Page
<u>DIGIPEAT</u>	ON OFF	on	Packet	Allows your station to be used as a digipeater.	6-46
<u>DISCONNE</u>	--	I-command	Packet	Used to disconnect a connected station in packet.	6-47
<u>DISPLAY</u>	--	class	Packet	Used to list all the commands the MFJ-1278 acknowledges.	6-48
<u>DISPLAY</u>	--	I-command	AMTOR	Used to list all the commands used in AMTOR.	6-51
<u>DWAIT</u>	n	33	Packet	Used to avoid collisions with digipeating.	6-51
<u>EASIN</u>	ON OFF	off	AMTOR	Allows the echoing of text that you have transmitted the instant it is sent.	6-52
<u>ECHO</u>	ON OFF	on	AMTOR	Allows the MFJ-1278 to transmit back to you everything that you type.	6-52
<u>ECHO</u>	ON OFF	on	All	Allows the MFJ-1278 to transmit back to you everything that you type in all mode of operation.	6-53
<u>EPSON</u>	ON OFF	on	All	Determines if you are using an EPSON/ IBM or C. ITOH printer.	6-53
<u>ERUS</u>	ON OFF	on	AMTOR	Inserts an underscore if the MFJ-1278 detects an error while receiving AMTOR.	6-54
<u>ESCAPE</u>	ON OFF	off	Packet	Specifies the character which will be output when an <escape> character is to be sent.	6-54
<u>FARNSWOR</u>	ON OFF	on	CW	Enables the MFJ-1278 to transmit CW in Farnswor method.	6-55
<u>FAXEOP</u>	ON OFF	on	FAX	Determines if the user will have terminate the end of a FAX picture.	6-55
<u>FAXMODE</u>	n	1-7	FAX	Sets the FAX formats in FAX mode.	6-56
<u>FAXNEG</u>	ON OFF	off	FAX	Causes the receiving FAX picture to print the white areas black, and black areas white.	6-56
<u>FAXREV</u>	ON OFF	off	FAX	Inverts all received FAX data.	6-56

Command	Parameter	Default	Mode	Function	Page
<u>FEC</u>	--	I-command	AMTOR	Initiates the broadcasting of Mode B forward error correcting mode.	6-57
<u>FIRMRNR</u>	ON OFF	off	Packet	Controls the handling of busy states by MFJ-1278.	6-57
<u>FLOW</u>	ON OFF	on	Packet	Sets type-in flow control to the terminal.	6-58
<u>FRACK</u>	n	3	Packet	Sets the time interval between retries.	6-58
<u>FULLDUP</u>	ON OFF	off	Packet	Allows communication in full duplex.	6-59
<u>GRAPHLF</u>	ON OFF	off	FAX/SSTV	Adds an extra "line feed" in graphic printing to the printer.	6-59
<u>HEADERLN</u>	ON OFF	off	Packet	Affects the display format of monitored packets.	6-60

Command	Parameter	Default	Mode	Function	Page
<u>LFADDALT</u>	ON OFF	on	RTTY	Enables the MFJ-1278 to go to the next line when a <CR> character is received in RTTY mode.	6-65
<u>LFIGNORE</u>	ON OFF	off	Packet	Line feeds are ignored except in transparent mode.	6-66
<u>LISTEN</u>	--	I-command	AMTOR	Used to monitor someone else's mode A AMTOR connection.	6-66
<u>MAILBOX</u>	ON OFF	off	Packet	Enables the personal mailbox.	6-67
<u>MAILED</u>	ON OFF	on	Packet	Controls the STA/MAIL LED. Flashes when mail is presence.	6-68
<u>MALL</u>	ON OFF	on	Packet	Determines the class of packets which are monitored.	6-68
<u>MATCH</u>	ON OFF	on	AMTOR	Used for selectively monitoring portions of mode B FEC transmissions.	6-69
<u>MAXFRAME</u>	n	4	Packet	Sets the upper limit for outstanding packets that can occur at one time.	6-69
<u>MBEGIN</u>	cccc	<<>>	AMTOR	Allows the display of mode B transmissions only after the reception of the beginning of the signal.	6-70
<u>MEND</u>	cccc	nnnn	AMTOR	Used with MBEGIN and MATCH and the mode B receiving end when the MEND string is received.	6-70
<u>MCOM</u>	ON OFF	off	Packet	Enables monitoring of connected and disconnected packet when monitor is on.	6-71
<u>MCON</u>	ON OFF	on	Packet	Allows the monitoring of other packets while connected to another station.	6-71
<u>MFILTER</u>	n1-n4	none	Packet	Allows you to eliminate certain	6-72

Command	Parameter	Default	Mode	Function	Page
<u>MONITOR</u>	ON OFF	on	Packet	Enables packets that are not addressed to you to be displayed.	6-74
<u>MRPT</u>	ON OFF	on	Packet	Affects the way monitored packets are displayed.	6-75
<u>MSPEED</u>	nn	20	CW	Sets the speed of CW to operate by the MFJ-1278.	6-76
<u>MSTAMP</u>	ON OFF	off	Packet	Enables the time stamping of monitored packets.	6-76
<u>MULTIFAX</u>	ON OFF	off	FAX	Enables multi-level FAX transmitting and receiving.	6-77
<u>MYCALL</u>	call	nocall	Packet	Sets the callsign of the MFJ-1278.	6-78
<u>MYALIAS</u>	call-n	blank	Packet	Specifies an alternate callsign for use as a digipeater only.	6-79

Command	Parameter	Default	Mode	Function	Page
<u>OMLC</u>	ON OFF	off	AMTOR	Instructs the MFJ-1278 to convert all characters, except those echoed, to their lower case equivalent.	6-85
<u>PACLEN</u>	n	128	Packet	Determines the number of characters it takes to automatically transmit a packet.	6-85
<u>PACTIME</u>	n	10	Packet	Determines the length of time between transmit and receive.	6-86
<u>PARITY</u>	n	0	Packet	Sets the parity mode for terminal or computer data transfer.	6-87
<u>PASS</u>	n	\$16 (^V)	Packet	Selects the ASCII character used for the "pass" input editing character.	6-88
<u>PASSALL</u>	ON OFF	off	Packet	Causes the MFJ-1278 to display packets received with invalid CRC fields.	6-89
<u>PIXTONES</u>	n	see 6-90	FAX/SSTV	Sets transmit tones for multi-level FAX/SSTV pictures.	6-90
<u>PKTPIX</u>	ON OFF	off	Packet	Allows MFJ-1278 to print packet pictures to the built-in printer port.	6-92
<u>PRINTGRA</u>	ON OFF	on	FAX/SSTV	Determines whether the MFJ-1278 will print the graphics to the printer or the terminal screen.	6-93
<u>PRINTER</u>	ON OFF	off	All	Turns the parallel printer port on or off.	6-94
<u>PRINTTES</u>	--	I-command	All	Used to test the printer connected to the parallel printer port.	6-94
<u>QRT</u>	--	I-command	AMTOR	Used to break a link in AMTOR.	6-95
<u>R</u>	--	I-command	AMTOR	Is the equivalent to QRT.	6-95
<u>RADIO</u>	n	I-command	All	Allows the user to select the radio port on the MFJ-1278.	6-96
<u>RANDOMCW</u>	ON OFF	off	CW	Allows the used of the random code generator.	6-96
<u>RBITMASK</u>	\$xx	0	RTTY/ ASCII	Set the bit inversion during receiving.	6-96


Command	Parameter	Default	Mode	Function	Page
<u>RECONNECT</u>	call1-9	I-command	Packet	Used to change the path through which you are currently connected to a station.	6-97
<u>RESTART</u>	--	I-command	Packet	Re-initializes the MFJ-1278 using the stored parameters.	6-97
<u>REDISPLA</u>	n	\$12 (^R)	All	Used to change the redisplay-line input editing character.	6-98
<u>RESET</u>	--	I-command	All	Resets all parameters to their default values and reinitiates the unit.	6-99
<u>RESPTIME</u>	n	5	Packet	Sets a minimum delay that is imposed on acknowledging packets.	6-99
<u>RESTORE</u>	--	I-command	AMTOR	Returns the MFJ-1278 AMTOR code converter to "LTRS" case, and flushes the transmit buffer.	6-100
<u>RETRY</u>	n	10	Packet	Allows retransmission of frames that are not acknowledged.	6-100
<u>RFE</u>	ON OFF	off	AMTOR	Will continue to retry until a QRT is received.	6-101
<u>RINV</u>	ON OFF	off	AMTOR	Controls the incoming received signal to be inverted before detection/processing occurs.	6-101
<u>RXBLOCK</u>	ON OFF	off	Packet	Determines whether the information will be sent in standard or block format.	6-102
<u>RXCAL</u>	--	I-command	All	Generates test signals that are used by the internal tuning software to align the demodulator circuit.	6-103
<u>RXINVERT</u>	ON OFF	off	RTTY/ ACII	Inverts the mark and space tones.	6-105
<u>SCREENLN</u>	n	80	All	Used to properly format terminal output.	6-105
<u>SELCALL</u>	ssss	I-command	AMTOR	Initiate a mode L "SELCALL" broadcast.	6-106
<u>SENDPAC</u>	n	\$0D (CR)	Packet	Selects the character that will force a packet to be sent in CONVERSE mode.	6-106


Command	Parameter	Default	Mode	Function	Page
<u>SERIANLNO</u>	0-65535	0	CW	Used for contest serial numbering.	6-107
<u>SETUP</u>	n	I-command	All	Used to set the mode and baud rate. Similar to the MODE command.	6-108
<u>SFNL</u>	ON OFF	off	AMTOR	Controls whether the 1278 adds a new line character to "+" and WRU.	6-109
<u>SLOTS</u>	nn	3	Packet	Determines how many sides are on the slot time dice.	6-109
<u>SOLF</u>	ON OFF	on	AMTOR	Determines whether only <lf> characters from the AMTOR receiver are sensed as newline characters.	6-110
<u>SRXALL</u>	ON OFF	on	AMTOR	Causes the MFJ-1278 to print all receivable mode S transmissions.	6-110
<u>START</u>	n	\$11 (^Q)	All	Selects the user restart character.	6-111
<u>STATUS</u>	--	I-command	AMTOR	Returns diagnostic information useful for helping us help you with your problems.	6-111
<u>STOP</u>	n	\$13 (^S)	All	Selects the user stop character.	6-112
<u>STREAMCA</u>	ON OFF	off	Packet	Used to enable the display of the connected to station after the stream identifier.	6-113
<u>STREAMDB</u>	ON OFF	off	Packet	Used to display received STREAMSWITCH6 characters by "doubling" them.	6-114
<u>STREAMSW</u>	n	\$7C ()	Packet	Selects the character used by both the MFJ-1278 and the user to select a new "stream".	6-115
<u>SYSOP</u>	--	I-command	Packet	Enables the MAILBOX systems operator to enter in messages to the BBS system/bbs.	6-116
<u>TINV</u>	ON OFF	off	AMTOR	Allows the user to invert the transmitted AMTOR signals.	6-116
<u>TRACE</u>	ON OFF	off	Packet	Enables the debugging protocol function.	6-117

Commands	Para.	Default	Mode	Function	Page
<u>TRANS</u>	--	I-command	Packet	Transparent mode.	6-118
<u>TRFLOW</u>	ON OFF	off	Packet	Enables and disables the software flow control.	6-118
<u>TRIES</u>	n	none	Packet	Retrieves the count of "tries" on the currently selected input stream.	6-119
<u>TUNE</u>	--	I-command	All	Keys the PTT and low tone for the current modem for 30 seconds or until you strike a key on your keyboard.	6-119
<u>TUNEPROC</u>	--	I-command	All	Used to tune the MFJ-1278 modulator and demodulator.	6-120
<u>TVHSYNC</u>	ON OFF	off	SSTV	Allows MFJ-1278 to look for Hsync on dark area around the picture.	6-120
<u>TVMODE</u>	n	1	SSTV	Selects the formats under the SSTV mode.	6-121
<u>TVBREAK</u>	n	see 6-122	SSTV	Sets the brightness and contrast of SSTV picture received on the built-in printer port.	6-122
<u>TVX</u>	ON OFF	off	SSTV	Enables multi-gray levels SSTV raw data to be sent to the terminal without any SSTV format.	6-123
<u>TXDELAY</u>	n	33	Packet	Tells the MFJ-1278 how long to wait	6-124

<u>TXDELAYC</u>	n	2	Packet	Controls a new timer that runs after the regular TXDELAY time has expired.	6-125
-----------------	---	---	--------	--	-------

Command	Parameter	Default	Mode	Function	Page
<u>UNSHIFT</u>	ON OFF	ON	RTTY/ ASCII	Determines the way the SPACE character is displayed in RTTY/ASCII.	6-128
<u>UNPROTO</u>	call1	CQ	Packet	Sets the digipeat and destination address fields of packets sent in the unconnected mode.	6-128
<u>USERS</u>	n	1	Packet	Controls the manner in which the incoming connect requests are handled.	6-129
<u>WDMODE</u>	ON OFF	off	AMTOR	Determines whether A mode transmission takes place any time you type a SPACE or RETURN character.	6-129
<u>WEIGHT</u>	n(0-255)	0	CW	Sets the weight factor for the CW transmission.	6-130
<u>WRU</u>	--	I-command	AMTOR	Causes the remote mode A "ARQ" station currently in contact with you to transmit its answer back message.	6-130
<u>XFLOW</u>	ON OFF	on	All	Enables the flow control.	6-131
<u>XMITOK</u>	ON OFF	on	Packet	Enables the transmit function.	6-131
<u>XOFF</u>	n	\$13 (^S)	All	Selects the MFJ-1278 stop character.	6-132
<u>XON</u>	n	\$11 (^Q)	All	Selects the MFJ-1278 restart character.	6-132

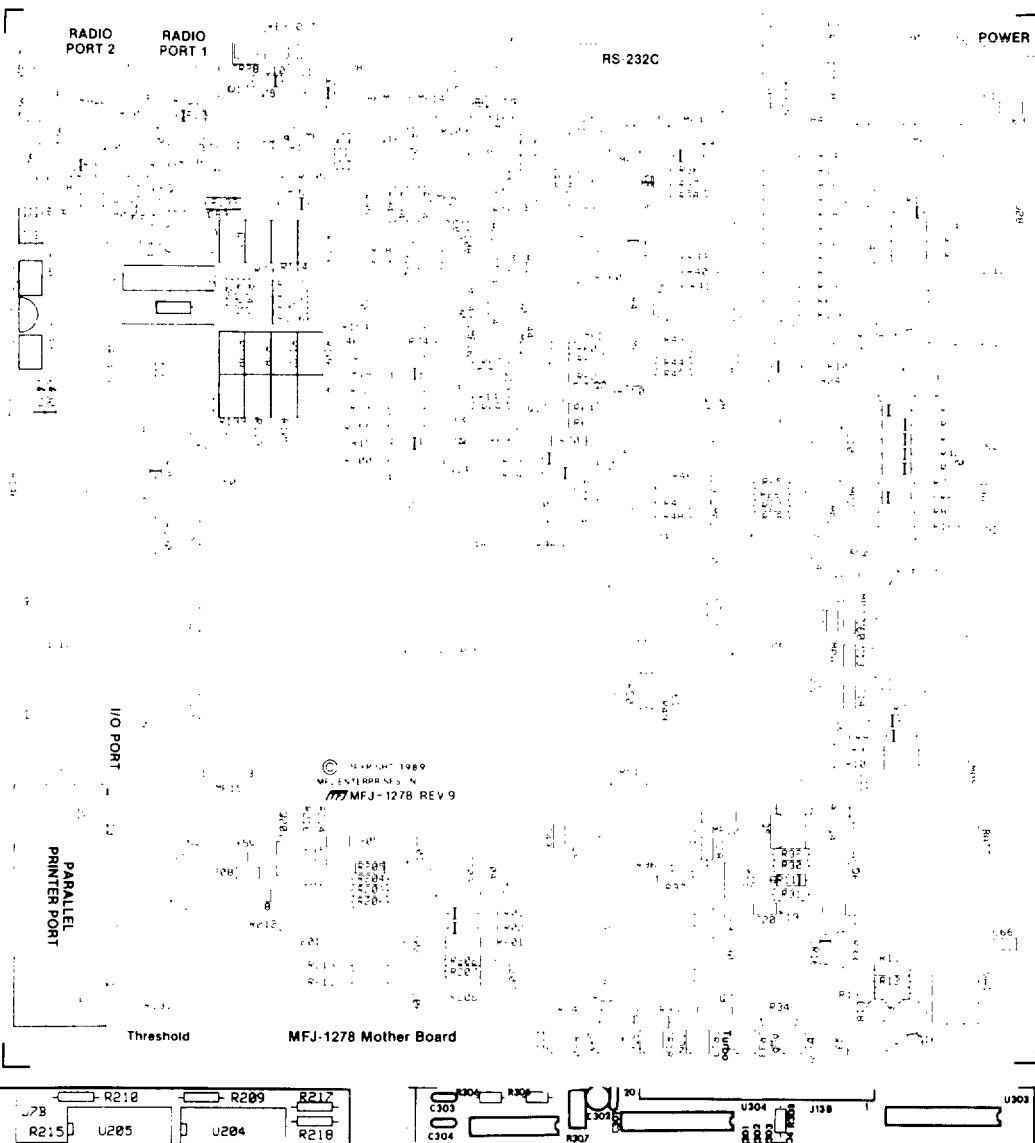

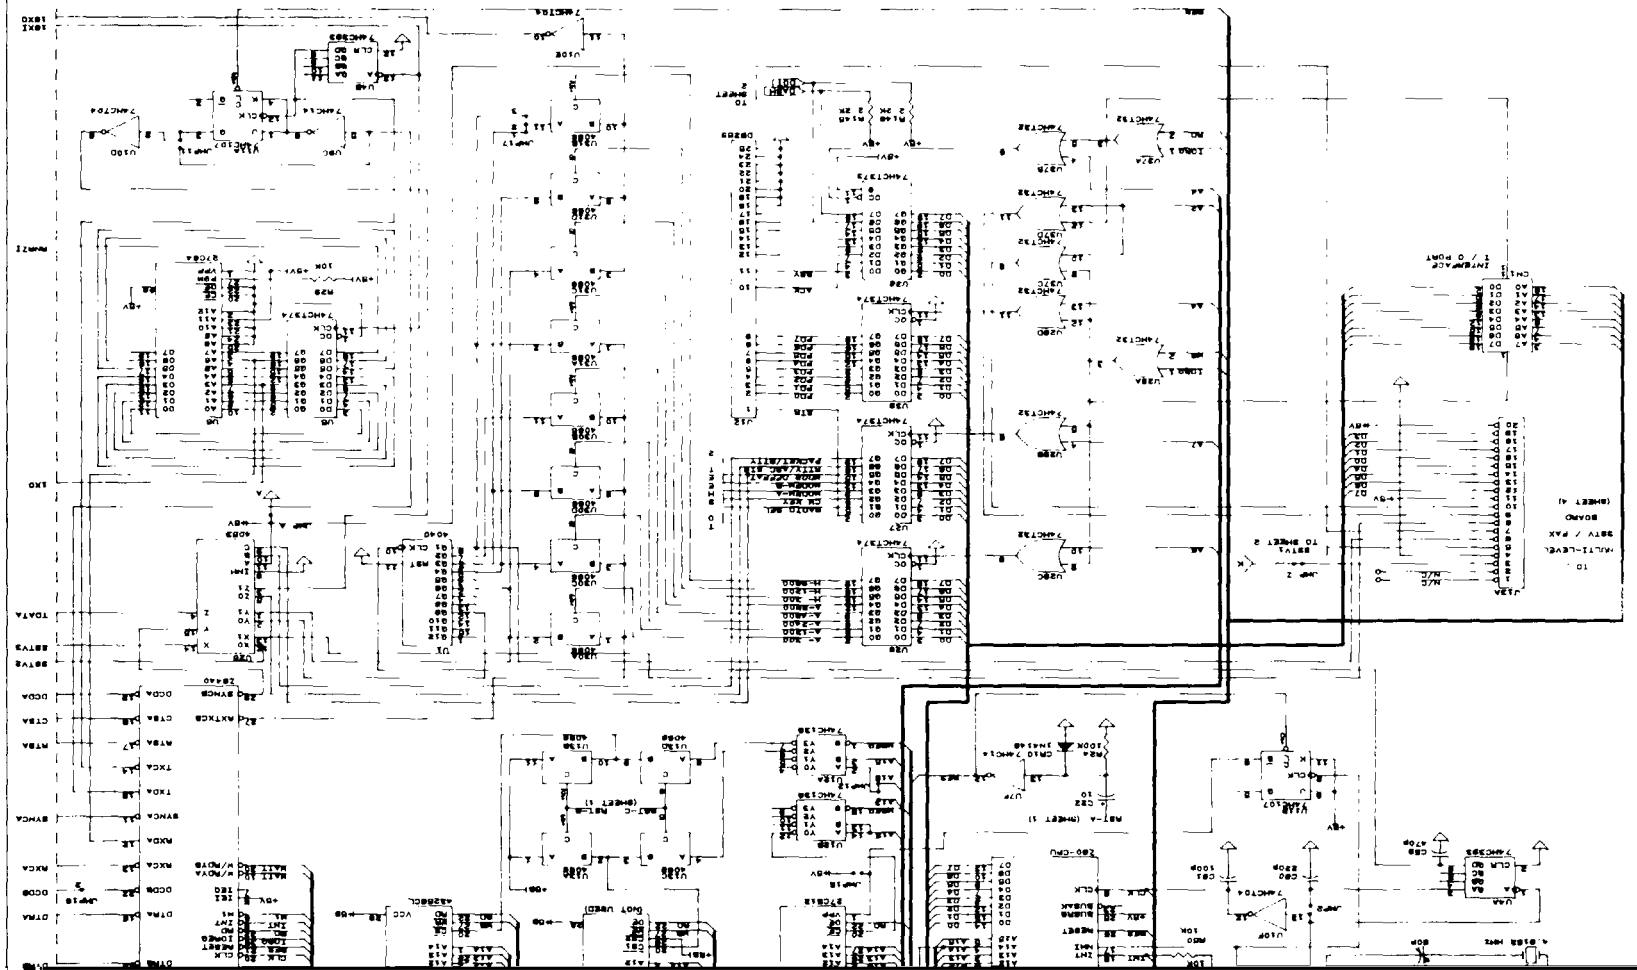

MFJ-1278 2400 Packet Modem

MFJ ENTERPRISES, INC.

Tit1a

MFJ 1278 (Rev. A)

Size Document Number 1278-5

Date: May 2, 1988 Bristol

