

Assembly and Operation

TABLE OF CONTENTS



PARTS PICTORIAL

KEY PART No.	PARTS No.	PER KIT	DESCRIPTION
--------------	-----------	---------	-------------


Mechanical Parts (Cont'd.)

B2	434-117	1	Transistor socket
B3	75-44	1	Micro-insulator

KEY PART No.	PARTS No.	PER KIT	DESCRIPTION
--------------	-----------	---------	-------------

GENERAL

	89-23	1	Line cord
--	-------	---	-----------

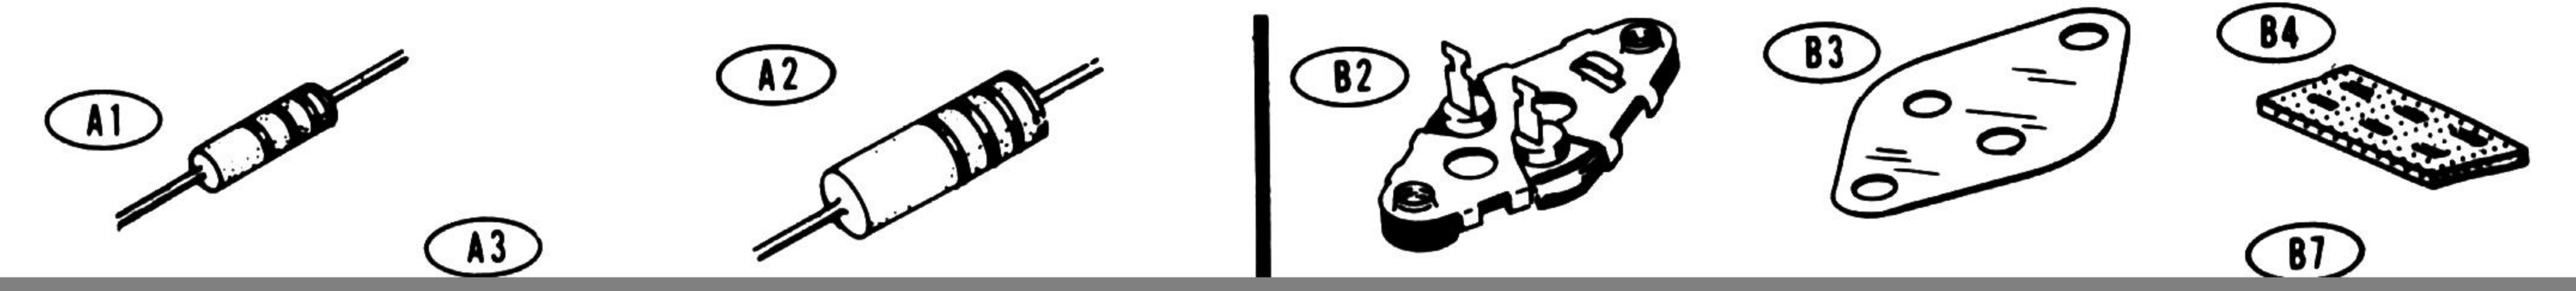







CHASSIS PARTS WIRING









240 VAC Wiring

Reference Detail AA for the following:





Refer to Pictorial 6 for the following steps.

- () Carefully peel away the backing paper from the blue and white label. Then press the label into position as shown. Be sure to refer to the numbers on

SPECIFICATIONS

Output Voltage 13.0 volts, regulated.

Maximum Output Current 600 mA continuous.

Temperature Drift Coefficient TAP57



IN CASE OF DIFFICULTY



Free Manual

Not to be resold

**Technology
Systems**